

Aperture
Bloom
Cycle
Mika
Moonrise
Mute
Scout
Stella
Tone
Tumbler
Twin
Valco
Verner

QUICKSHIP →



WageWorks
Tempe, Arizona, USA

Photo Credit: Halifax Digital Image

Distinctive designs, expedited delivery

**Never miss an opportunity because
of a tight timeline. Eureka's extensive
collection of select luminaires
ship in less than 5 days.**



Terms & Conditions

- A Quickship order must not exceed quantity of 5 per Quickship product for an order to ship within five (5) days
- A Quickship order must not exceed quantity of 20 per Quickship product for an order to ship within ten (10) days
- 5-day or 10-day lead times are estimated from the date of processing. Does not include weekends/holidays
- All orders received after 4pm EST (1pm PST), on weekends and on holidays, will be processed the next business day
- Incomplete purchase orders will cause delays in order processing and shipment
- Same orders or same project can have multiple different Quickship products
- A project can have multiple Quickship orders as long as orders are placed 15 days apart
- Standard shipping terms & conditions apply

The options detailed within the following pages represent product options that qualify for the Quickship program, additional options are available on standard shipping.

For more details, visit eurekalighting.com

**TriHealth Corporate
Administration Offices**
Cincinnati, Ohio, USA

Photo Credit: Ryan C. Kurtz



APERTURE 4256

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI



WHM



ANTE

FAMILY FAMILLE




4256-12



4256-24



4256-36

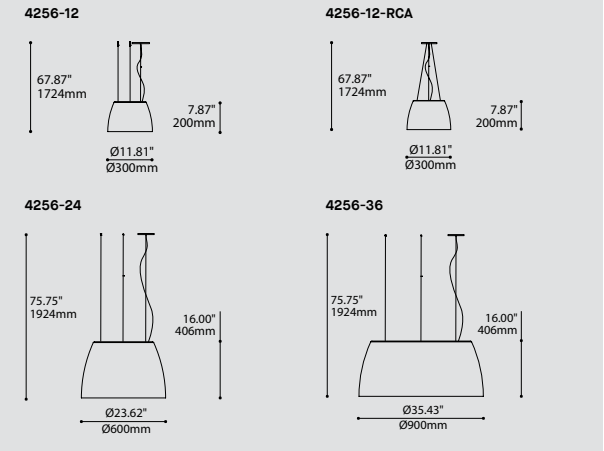

QUICKSHIP

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
MODEL		MODÈLE	
4256-12	APERTURE 12"		
4256-24	APERTURE 24"		
4256-36	APERTURE 36"		
LIGHT SOURCE		SOURCE LUMINEUSE	LED
LED*	REGULAR OUTPUT		
	*3983 ACCESSORY IS PROVIDED ONLY FOR 4256-12		
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR	
30	3000K		
35	3500K		
40	4000K		
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI		
VOLTAGE		VOLTAGE	
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION		OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
CABLE		CÂBLE	AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE		
CABLE LENGTH		LONGUEUR DE CÂBLE	
60	60" AIRCRAFT CABLE (STD LENGTH)		
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)		
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING CABLE OPTION		OPTION DE MONTAGE DE CÂBLE	
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER		
	FOR 4256-12 ONLY		
	IF NO OPTION IS SELECTED, A ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES WILL BE PROVIDED		
CANOPY FINISH		FINI PAVILLON	WHM
WHM	MATTE WHITE		
EXTERIOR SHADE FINISH		FINI ABAT-JOUR EXTÉRIEUR	
WHM	MATTE WHITE		
ANTE	ANTHRACITE FINE TEXTURE		
INTERIOR SHADE FINISH		FINI ABAT-JOUR INTÉRIEUR	WHM
WHM	MATTE WHITE		
ACCESSORY		ACCESSOIRE	
3983	DEEP JUNCTION BOX (PROVIDED FOR 4256-12 AS PER ABOVE)		

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS

BIM DIM EMB IES LED

DESIGN: Hidden inside of an elegant form is a beautiful soft glow of LED illumination that encircles a surprising hollow core. Aperture is available in three formats, small, large and extra-large.

INSTALLATION: Easy to install, adjust and level triple aircraft cable mounting.

LIGHT SOURCE: Aperture features a custom LED light engine that is available with a standard dimming driver.

EXTERIOR FINISH: White or Anthracite matte polyester powder coating.

INTERIOR FINISH: Highly reflective matte white polyester powder coating.

CERTIFIED: c-CSA-us

BLOOM 4269

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE

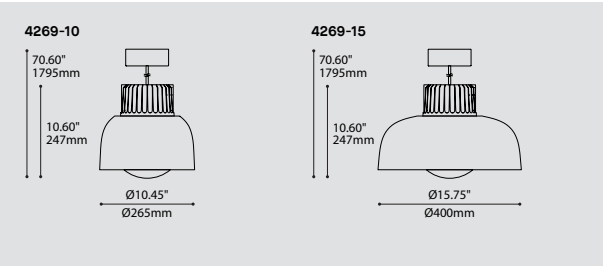

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL MODÈLE		
4269-10	BLOOM 10"	
4269-15	BLOOM 15"	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
CABLE CABLE		C
C	BLACK CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR (A) (B)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
(A) SHADE INTERIOR IS ALWAYS WHITE		
(B) HEATSINK IS ALWAYS BLACK		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN :	Bloom is a light fixture with a soft and inviting shape. Under the colorful shade hides a luminous globe offering a generous amount of soft light. Bloom is available in two sizes and a variety of different finishes.
INSTALLATION :	Easy to install and adjust single power cable mounting.
LIGHT SOURCE :	A central powerful COB type light source project a powerful light, softened by the spherical polymer diffuser to create a light that is efficient, yet soft to the eye. Offered with phase or 0-10V gradation options.
STRUCTURE :	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED :	c-CSA-us, c-UL-us

BLOOM 4769

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE

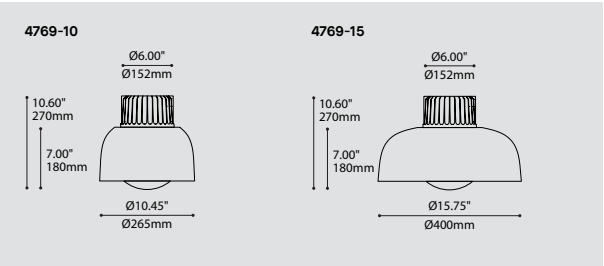

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
MODEL		MODÈLE	
4769-10	BLOOM 10"		
4769-15	BLOOM 15"		
LIGHT SOURCE		SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT		
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR	
30	3000K		
35	3500K		
40	4000K		
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI		
VOLTAGE		VOLTAGE	
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION		OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.			
HEATSINK FINISH		FINI RADIATEUR	BLKE
BLKE	BLACK FINE TEXTURE		
SHADE FINISH		FINI ABAT-JOUR ^(A)	
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
^(A) SHADE INTERIOR IS ALWAYS WHITE			
DIFFUSER FINISH		FINI DIFFUSEUR	WH
WH	WHITE		
ACCESSORY		ACCESSOIRE	3983
3983	DEEP JUNCTION BOX		

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN :	Bloom is a light fixture with a soft and inviting shape. Under the colorful shade hides a luminous globe offering a generous amount of soft light. Bloom is available in two sizes and a variety of different finishes.
INSTALLATION :	Ceiling installation on deep junction box (supplied with light fixture).
LIGHT SOURCE :	A central powerful COB type light source project a powerful light, softened by the spherical polymer diffuser to create a light that is efficient, yet soft to the eye. Offered with phase or 0-10V gradation options.
STRUCTURE :	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED :	c-CSA-us, c-UL-us

BLOOM 1209

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES




FINISH FINI



BLKE

WHE

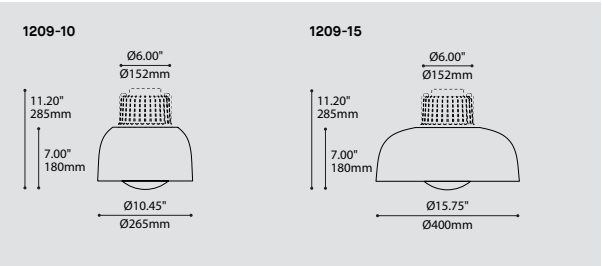

QUICKSHIP

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS		
	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS		
MODEL	MODÈLE		
1209-10	BLOOM 10"		
1209-15	BLOOM 15"		
LIGHT SOURCE	SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT		
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR		
30	3000K		
35	3500K		
40	4000K		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI		
VOLTAGE	VOLTAGE		
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION	OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
SHADE FINISH	FINI ABAT-JOUR ^(A)		
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
	^(A) SHADE INTERIOR IS ALWAYS WHITE		
DIFFUSER FINISH	FINI DIFFUSEUR		WH
WH	WHITE		

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN :	Bloom is a light fixture with a soft and inviting shape. Under the colorful shade hides a luminous globe offering a generous amount of soft light. Bloom is available in two sizes and a variety of different finishes.
INSTALLATION :	Recessed mounting system allows for simple and secure installation in a variety of ceiling types from 0.375" (9.5mm) to 2.75" (70mm) thick, accommodating renovation projects.
LIGHT SOURCE :	A central powerful COB type light source project a powerful light, softened by the spherical polymer diffuser to create a light that is efficient, yet soft to the eye. Offered with phase or 0-10V gradation options.
STRUCTURE :	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED :	c-CSA-us

CYCLE 4800-24

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI



WHM-WH ANTE-WH

MOUNTING OPTIONS OPTIONS DE MONTAGE



4800-24	4800-24-RCA	4800-24-RCC
64.00"1625mm 4.00"102mm† Ø23.30"Ø592mm	64.00"1625mm 4.00"102mm† Ø23.30"Ø592mm	64.00"1625mm 4.00"102mm† Ø23.30"Ø592mm

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL	MODÈLE	4800-24
4800-24	CYCLE 24*	
LIGHT SOURCE	SOURCE LUMINEUSE	
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
LED.SHO	SUPER HIGH OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI	
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
DRIVER POSITION	POSITION DU PILOTE	
RDP *	RECESSED DRIVER	
	* ONLY AVAILABLE WITH 120V & 277V	
	* 3981C ACCESSORY IS REQUIRED	
CABLE	CÂBLE	AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH	LONGUEUR DE CÂBLE	
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION	OPTION DE MONTAGE	RC
RC	ROUND CANOPY / PAVILLON ROND	
	FOR RECESSED DRIVER OPTION: 0.25" (2403B)	
	FOR STANDARD: 1.75" CANOPY (2405H)	
MOUNTING CABLE OPTION	OPTION DE MONTAGE DE CÂBLE	
RCA *	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER	
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES	
	* NOT AVAILABLE WITH RECESSED DRIVER (RDP)	
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
CANOPY FINISH	FINI PAVILLON	WHM
WHM	MATTE WHITE	
RING FINISH	FINI ANNEAU	
WHM	MATTE WHITE	
ANTE	ANTHRACITE FINE TEXTURE	
ACCESSORY	ACCESSOIRE	
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION	
2990I-24	TONE INTERIOR CHARCOAL FELT	
2990E-24	TONE EXTERIOR CHARCOAL FELT	
2990EI-24	TONE EXTERIOR-INTERIOR CHARCOAL FELT	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		



CYCLE 4800-36

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE

NOTES




FINISH FINI



WHM-WH ANTE-WH

MOUNTING OPTIONS OPTIONS DE MONTAGE

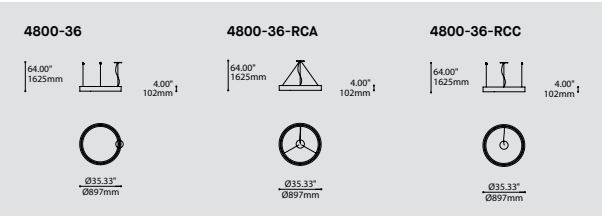

ORDERING SPECIFICATION		SÉPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL	MODÈLE		4800-36
4800-36	CYCLE 36"		
LIGHT SOURCE	SOURCE LUMINEUSE		
LED	REGULAR OUTPUT		
LED.HO	HIGH OUTPUT		
LED.SHO	SUPER HIGH OUTPUT		
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR		
30	3000K		
35	3500K		
40	4000K		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI		
VOLTAGE	VOLTAGE		
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION	OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE			
DRIVER POSITION	POSITION DU PILOTE		
RDP*	RECESSED DRIVER		
	* ONLY AVAILABLE WITH 120V & 277V		
	* 3981C ACCESSORY IS REQUIRED		
CABLE	CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE		
CABLE LENGTH	LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)		
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)		
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING OPTION	OPTION DE MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND		
	FOR RECESSED DRIVER OPTION: 0.25" (2403B)		
	FOR STANDARD: 1.75" CANOPY (2405H)		
MOUNTING CABLE OPTION	OPTION DE MONTAGE DE CÂBLE		
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER		
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES		
	* NOT AVAILABLE WITH RECESSED DRIVER (RDP)		
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD		
CANOPY FINISH	FINI PAVILLON		WHM
WHM	MATTE WHITE		
RING FINISH	FINI ANNEAU		
WHM	MATTE WHITE		
ANTE	ANTHRACITE FINE TEXTURE		
ACCESSORY	ACCESSOIRE		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION		
2990I-36	TONE INTERIOR CHARCOAL FELT		
2990E-36	TONE EXTERIOR CHARCOAL FELT		
2990EI-36	TONE EXTERIOR-INTERIOR CHARCOAL FELT		
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD			

CYCLE 4800-54

QUICKSHIP


PROJECTPROJET

SPEC TYPE

NOTES





FINISHFINI



WHM-WH ANTE-WH

MOUNTING OPTIONS OPTIONS DE MONTAGE

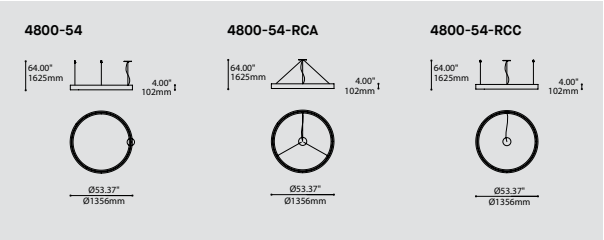

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5 QS10	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL MODÈLE		4800-54
4800-54	CYCLE 54"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
LED.SHO	SUPER HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
DRIVER POSITION POSITION DU PILOTE		
RDP *	RECESSED DRIVER	
	* ONLY AVAILABLE WITH 120V & 277V	
	* 3981C (REG) OR 3981D (HO) ACCESSORY IS REQUIRED	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND	
	FOR RECESSED DRIVER OPTION (REG): 0.25" (2403B)	
	FOR RECESSED DRIVER OPTION (HO): 0.25" (2405B)	
	FOR STANDARD: 1.75" CANOPY (2405H)	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RCA *	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER	
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES	
	* NOT AVAILABLE WITH RECESSED DRIVER (RDP)	
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
CANOPY FINISH FINI PAVILLON		WHM
WHM	MATTE WHITE	
RING FINISH FINI ANNEAU		
WHM	MATTE WHITE	
ANTE	ANTHRACITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (REG)	
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (HO)	
2990I-54	TONE INTERIOR CHARCOAL FELT	
2990E-54	TONE EXTERIOR CHARCOAL FELT	
2990EI-54	TONE EXTERIOR-INTERIOR CHARCOAL FELT	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		



CYCLE 4800-72

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE

NOTES





FINISH FINI



WHM-WH ANTE-WH

MOUNTING OPTIONS OPTIONS DE MONTAGE

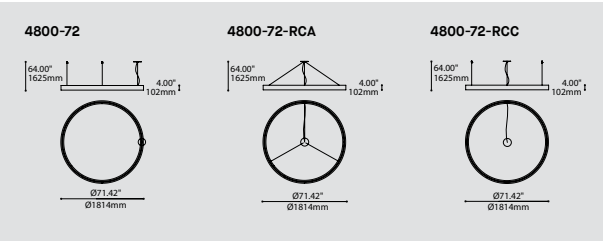

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL MODÈLE		4800-72
4800-72	CYCLE 72"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
LED.SHO	SUPER HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
DRIVER POSITION POSITION DU PILOTE		
RDP*	RECESSED DRIVER	
	* ONLY AVAILABLE WITH 120V & 277V	
	* 3981C (REG) OR 3981D (HO) ACCESSORY IS REQUIRED	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND	
	FOR RECESSED DRIVER OPTION (REG): 0.25" (2403B)	
	FOR RECESSED DRIVER OPTION (HO): 0.25" (2405B)	
	FOR STANDARD: 1.75" CANOPY (2405H)	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER	
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES	
	* NOT AVAILABLE WITH RECESSED DRIVER (RDP)	
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
CANOPY FINISH FINI PAVILLON		WHM
WHM	MATTE WHITE	
RING FINISH FINI ANNEAU		
WHM	MATTE WHITE	
ANTE	ANTHRACITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (REG)	
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (HO)	
2990I-54	TONE INTERIOR CHARCOAL FELT	
2990E-54	TONE EXTERIOR CHARCOAL FELT	
2990EI-54	TONE EXTERIOR-INTERIOR CHARCOAL FELT	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		



MIKA 4230

QUICKSHIP

PROJECTPROJET

SPEC TYPE

NOTES





OPTIONS



FAMILYFAMILLE



MOUNTING OPTIONSOPTIONS DE MONTAGE

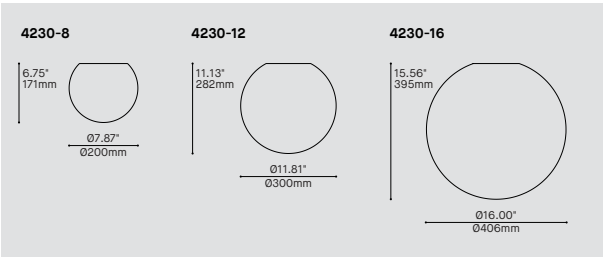

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITSQUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITSQUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL	MODÈLE	
4230-8	MIKA 8"	
4230-12	MIKA 12"	
4230-16	MIKA 16"	
LIGHT SOURCESOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURETEMPÉRATURE DE COULEUR ^(A)		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTIONOPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
*REQUIRES RC3 CANOPY. REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
CABLE	CÂBLE	C
C	CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTHLONGUEUR DE CÂBLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTINGMONTAGE		
RC1	ROUND CANOPY / PAVILLON ROND	
RC2*	FOR DIMMING LED: 1.75" CANOPY (2471H)	
RC3	FOR DIMMING LED: 0.5" CANOPY (2471C)	
*3983 ACCESSORY PROVIDED		
CANOPY FINISHFINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISHFINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORYACCESSOIRE		
3983*	DEEP JUNCTION BOX (PROVIDED FOR SCREWLESS 0.5" CANOPY 2471C)	
*JUNCTION BOX IS AVAILABLE FOR ADVANCE SHIPPING		

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Classic round globe with an evenly frosted shade available with 8", 12" and 16" diameters. Mika can be specified as a ceiling or wall mount and pendant.
INSTALLATION:	Suspension on clear power cable, easy to install and adjust on site. Two magnetic canopies with no visible fastener are available: standard (2471H) or slim (2471C) provided with a deep junction box (3983).
LIGHT SOURCE:	High performance LED module mounted on an extruded aluminum heatsink, Mika is offered with standard dimming options 0-10V (DV) or phase (DP). Emergency options available.
DIFFUSER:	Translucent white diffuser made of impact resistant rotomolded MDPE.
CERTIFIED:	c-CSA-us

MIKA 3230

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES



OPTIONS



3230-8



3230-12



3230-16

FAMILY FAMILLE




4428-16-RAP



4428-10-RAP



4230-12

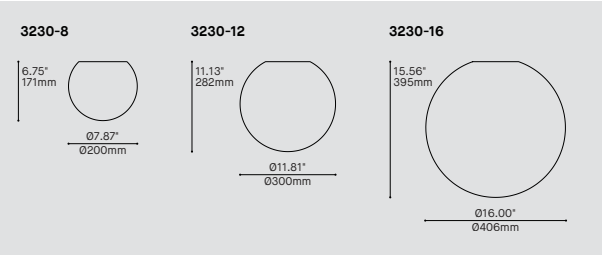

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP				
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS			QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS			QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL		MODÈLE		
3230-8	MIKA 8"			
3230-12	MIKA 12"			
3230-16	MIKA 16"			
LIGHT SOURCE		SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT			
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR ^(A)		
30	3000K			
35	3500K			
40	4000K			
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI			
VOLTAGE		VOLTAGE		
120V	120 VOLT			
277V	277 VOLT			
CONTROL OPTION		OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)			
DP	PHASE DIMMING (120V ONLY)			
NLTAIR2*	NLIGHT AIR CONTROL GEN 2			
NLIGHT*	NLIGHT WIRED CONTROL			
* NLIGHT INTEGRATION REQUIRES THE USAGE OF A REMOTE BOX. REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.				
DIFFUSER FINISH		FINI DIFFUSEUR		WH
WH	WHITE			
ACCESSORY		ACCESSOIRE		
3983*	DEEP JUNCTION BOX (PROVIDED DV AND DP)			
* JUNCTION BOX IS AVAILABLE FOR ADVANCE SHIPPING				

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN :	Classic round globe with an evenly frosted shade available with 8", 12" and 16" diameters. Mika can be specified as a ceiling or wall mount and pendant.
INSTALLATION :	Designed with a "twist and lock" installation system for easy installation without visible fasteners. Mika is mounted on a deep junction box (3983 – included).
LIGHT SOURCE :	High performance LED module mounted on an extruded aluminum heatsink, Mika is offered with standard dimming options 0-10V (DV) or phase (DP). Emergency and nLight options available.
DIFFUSER :	Translucent white diffuser made of impact resistant rotomolded MDPE.
CERTIFIED :	c-CSA-us

QUICKSHIP


MOONRISE CLASSIC 3530-23

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES

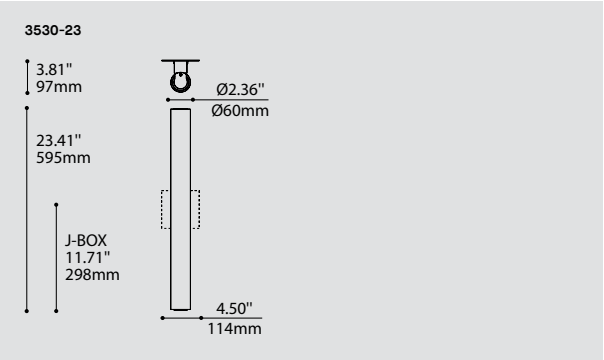

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
MODEL		MODÈLE	3530-23
3530-23		MOONRISE CLASSIC 23" (ROUND GLASS)	
LIGHT SOURCE		SOURCE LUMINEUSE	
LED	REGULAR OUTPUT		
LED.HO	HIGH OUTPUT		
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR ^(A)	
30	3000K		
35	3500K		
40	4000K		
VOLTAGE		VOLTAGE	
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION		OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)		
STRUCTURE FINISH		FINI STRUCTURE	
CHR	CHROME		
S C	SATIN CHROME		
DIFFUSER FINISH		FINI DIFFUSEUR	WH
WH	WHITE		
ACCESSORY		ACCESSOIRE	
3980		MINI JUNCTION BOX	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD			

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- ADA
- BIM
- DIM
- EMB
- IES
- LED
- REM
-

DESIGN:	Modern classic round profile wall sconce or surface mounted fixture. ADA compliant.
STRUCTURE:	Machined steel end caps & die-stamped steel structure with plated finish.
DIFFUSER:	Hand blown white triplex glass.
CERTIFIED:	c-CSA-us, c-UL-us
CONCEPTION:	Applique ou plafonnier cylindrique classique et contemporain. Conforme à la norme ADA.
STRUCTURE:	Embout d'acier usiné et acier embouti plaqués.
ABAT-JOUR:	Verre triplex blanc soufflé à la main.
CERTIFIÉ:	c-CSA-us, c-UL-us

MUTE 4258-16

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



CHF

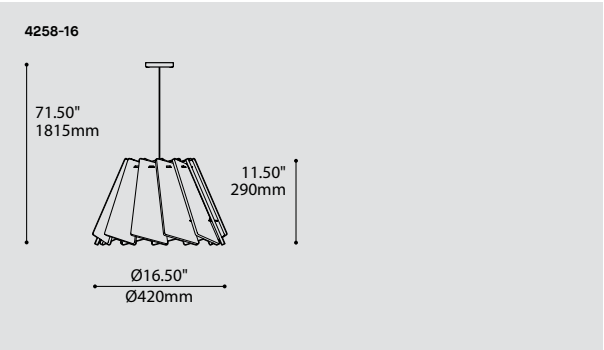

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL MODÈLE		4258-16
4258-16	MUTE 16"	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
CABLE CÂBLE		C
C	CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
CANOPY FINISH FINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR		CHF
CHF	CHARCOAL FELT	
ACRYLIC FINISH FINI ACRYLIQUE		WH
WH	WHITE	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Now offered in two formats, this soft, colorful and sound absorbing large format downlight pendant is composed of twelve felt-like acoustic panels surrounding a custom LED light source distributing a uniform and direct light.
INSTALLATION:	Easy to install, adjust single power cable mounting with clip-on acoustic panels.
LIGHT SOURCE:	Mute features a custom LED light engine supplied with a standard dimming driver (0-10V or phase).
STRUCTURE:	Precision cut chrome top cover plate and white or chrome canopy.
SHADE:	The custom CNC cut panels are made from recycled PET bottles and are recyclable. Available in charcoal.
CERTIFIED:	c-CSA-us



MUTE 4258-32

QUICKSHIP

PROJECTPROJET

SPEC TYPE


NOTES



FINISHFINI



CHF

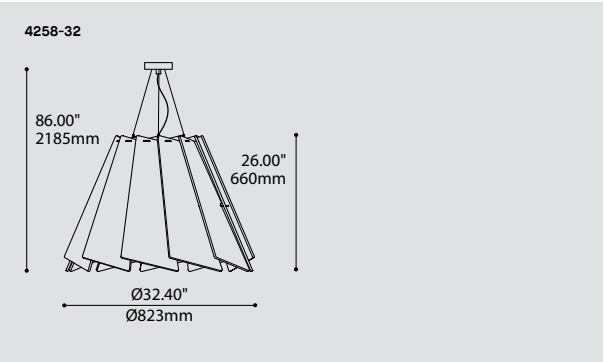

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITSQUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITSQUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL	MODÈLE	4258-32
4258-32	MUTE 32"	
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTIONOPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
CABLE	CÂBLE	AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTHLONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
CANOPY FINISHFINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
SHADE FINISHFINI ABAT-JOUR		CHF
CHF	CHARCOAL FELT	
ACRYLIC FINISHFINI ACRYLIQUE		WH
WH	WHITE	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Now offered in two formats, this soft, colorful and sound absorbing large format downlight pendant is composed of twelve felt-like acoustic panels surrounding a custom LED light source distributing a uniform and direct light.
INSTALLATION:	Easy to install, adjust and level triple aircraft cable mounting with clip-on acoustic panels.
LIGHT SOURCE:	Mute features a custom LED light engine supplied with a standard dimming driver (0-10V or phase).
STRUCTURE:	Precision cut chrome top cover plate and white or chrome canopy.
SHADE:	The custom CNC cut panels are made from recycled PET bottles and are recyclable. Available in charcoal.
CERTIFIED:	c-CSA-us

Confidential Client
Québec City, Québec, CA

Photo Credit: Stephane Groleau



SCOUT 4048

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI



BLKE

WHE



OVERALL HEIGHT HAUTEUR HORS TOUT

	LED 0.50" CANOPY
MOUNTING	2471C
CABLE & 4048-6	69.70"
CABLE & 4048-10	73.95"
CABLE & 4048-18	81.45"

MOUNTING OPTIONS OPTIONS DE MONTAGE



STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

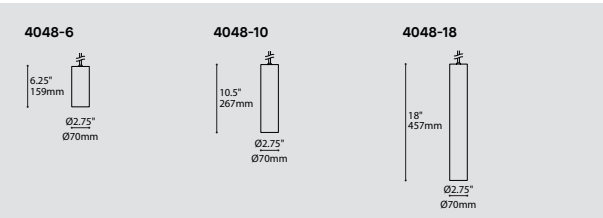

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL MODÈLE		
4048-6	SCOUT 6"	
4048-10	SCOUT 10"	
4048-18	SCOUT 18"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
BEAM ANGLE ANGLE DE FAISCEAU		
NA	NARROW (24°)	
ME	MEDIUM (45°)	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS	
FRO	FROSTED GLASS LENS	
HON	HONEYCOMB LOUVER	
SOL	SOLITE SOFTENING LENS	
CABLE CABLE		C
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
	*FOR WHITE STRUCTURE: WHITE CABLE, FOR OTHER STRUCTURE FINISH: BLACK CABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND	
	SCREWLESS 0,5" CANOPY (2471C)	
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
STRUCTURE FINISH FINI STRUCTURE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
BAFFLE FINISH FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4048-6 WITH CANOPY)	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD



SCOUT 4049

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI




BLKE WHE



OVERALL HEIGHT HAUTEUR HORS TOUT

	LED 0.50" CANOPY
MOUNTING	2471C
CABLE & 4049-6	69.70"
CABLE & 4049-10	73.95"
CABLE & 4049-18	81.45"

MOUNTING OPTIONS OPTIONS DE MONTAGE



STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

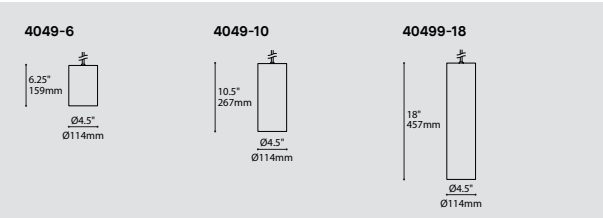

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL MODÈLE		
4049-6	SCOUT 6"	
4049-10	SCOUT 10"	
4049-18	SCOUT 18"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
BEAM ANGLE ANGLE DE FAISCEAU		
NA	NARROW (28°)	
ME	MEDIUM (48°)	
WI	WIDE (64°)	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS	
FRO	FROSTED GLASS LENS	
HON	HONEYCOMB LOUVER	
SOL	SOLITE SOFTENING LENS	
CABLE CABLE		C
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
	*FOR WHITE STRUCTURE: WHITE CABLE, FOR OTHER STRUCTURE FINISH: BLACK CABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND	
	SCREWLESS 0,5" CANOPY (2471C)	
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
STRUCTURE FINISH FINI STRUCTURE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
BAFFLE FINISH FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4049-6 WITH CANOPY)	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		



SCOUT 4548

QUICKSHIP



PROJECTPROJET

SPEC TYPE

NOTES



FINISHFINI

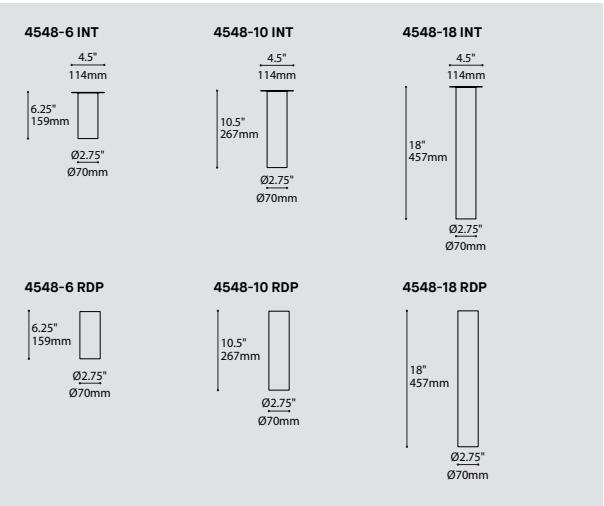

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL MODÈLE		
4548-6	SCOUT 6"	
4548-10	SCOUT 10"	
4548-18	SCOUT 18"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
BEAM ANGLE ANGLE DE FAISCEAU		
NA	NARROW (24°)	
ME	MEDIUM (45°)	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS	
FRO	FROSTED GLASS LENS	
HON	HONEYCOMB LOUVER	
SOL	SOLITE SOFTENING LENS	
DRIVER & CANOPY OPTION OPTION DE PILOTE & PAVILLON		
INT*	INTERNAL DRIVER, WITH FLAT CANOPY	
RDP	RECESSED DRIVER, NO CANOPY	
	*FOR 4548-6, DRIVER WILL BE IN DEEP JUNCTION BOX	
CANOPY FINISH FINI PAVILLON ^(A)		
WHE*	WHITE FINE TEXTURE	
	*IF NO FINISH IS SELECTED, FLAT CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH	
	^(A) FILL IN IF INT DRIVER & CANOPY OPTION AND WHE FINISH IS SELECTED, OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
BAFFLE FINISH FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4548-6 WITH INT OPTION)	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM

DIM

EMB

IES

LED

RDP

Ø 2.5" (63.5mm)

CERTIFIED: c-CSA-us

SCOUT 4549

QUICKSHIP

PROJECTPROJET

SPEC TYPE

NOTES




FINISHFINI



BLKE

WHE

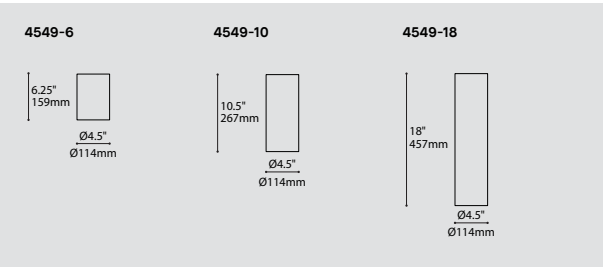

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS		
	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS		
MODEL	MODÈLE		
4549-6	SCOUT 6"		
4549-10	SCOUT 10"		
4549-18	SCOUT 18"		
LIGHT SOURCE	SOURCE LUMINEUSE		
LED	REGULAR OUTPUT		
LED.HO	HIGH OUTPUT		
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR		
30	3000K		
35	3500K		
40	4000K		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI		
VOLTAGE	VOLTAGE		
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION	OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
BEAM ANGLE	ANGLE DE FAISCEAU		
NA	NARROW (28°)		
ME	MEDIUM (48°)		
WI	WIDE (64°)		
OPTICAL ACCESSORIES	ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS		
FRO	FROSTED GLASS LENS		
HON	HONEYCOMB LOUVER		
SOL	SOLITE SOFTENING LENS		
STRUCTURE FINISH	FINI STRUCTURE		
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
BAFFLE FINISH	FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
ACCESSORY	ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4549-6)		
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD			

PRODUCT CHARACTERISTICS

CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED



STELLA 4272-9

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES




FINISH FINI



BLKE



WHE

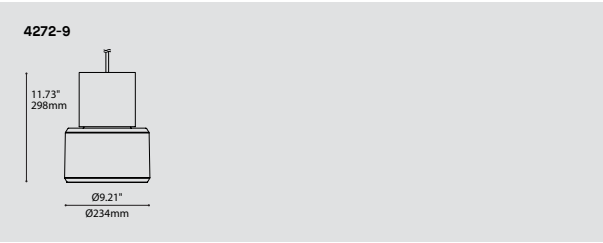

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL	MODÈLE	4272-9
4272-9	STELLA	
LIGHT SOURCE	SOURCE LUMINEUSE	
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
STEM OR CABLE	TIGE OU CABLE	C
C	CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR ^(A) ^(B)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
^(A) SHADE INTERIOR IS ALWAYS WHITE		
^(B) SHADE FINISH DICTATES THE CABLE COLOR		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN :	Stella, at its core, is a powerful light engine fused to a minimalist aluminum shell. A large diffusion dome hidden inside the shade creates a uniform direct & indirect illumination.
INSTALLATION :	Single power cable or stem for a sleek look.
LIGHT SOURCE :	A highly powerful COB type light source project a light, softened by a large polymer diffusion dome to create an illumination that is efficient & uniform. Some of the light is reflected upward by the dome; thus illuminating indirectly the ceiling. Offered with phase or 0-10V dimming options.
STRUCTURE :	Thick extruded aluminium tube with a slotted top to let the heat escape.
SHADE :	The precision spun aluminum shade is optimised to reduce glare. White internal finish for optimal light reflection.
CERTIFIED :	c-CSA-us, c-UL-us


TONE 2990IE

QUICKSHIP

PROJECTPROJET

SPEC TYPE

NOTES

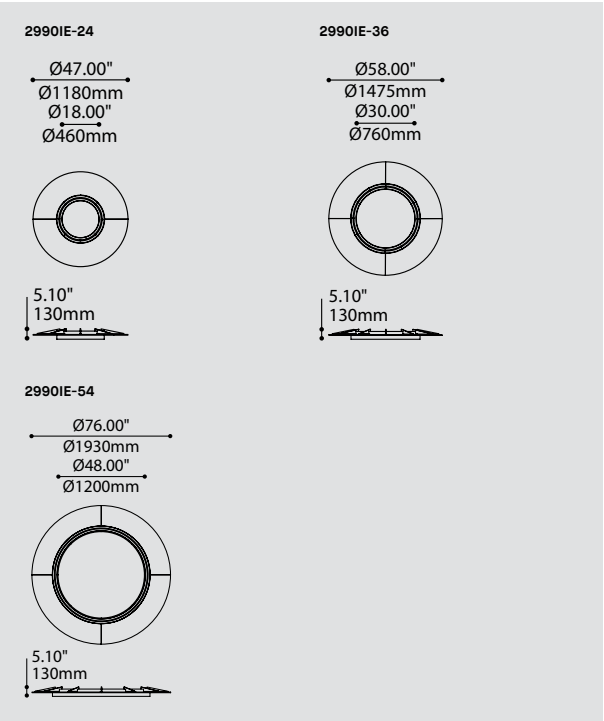

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP				
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL	MODÈLE ^(A)			
2990EI-24	TONE EXTERIOR-INTERIOR CHARCOAL FELT – 24"			
2990EI-36	TONE EXTERIOR-INTERIOR CHARCOAL FELT – 36"			
2990EI-54	TONE EXTERIOR-INTERIOR CHARCOAL FELT – 54"			
^(A) CYCLE SOLD SEPARATELY				
STRUCTURE FINISH		FINI STRUCTURE		CHF
CHF	CHARCOAL FELT			
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN :	A sound absorbing structure that installs onto the Cycle luminaire to improve the sound quality of your space. It uses a proven ecological sound absorbing material to reduce unwanted reflected sounds to dampen ambient noises.
INSTALLATION :	It installs quickly and without the need of tools on an existing suspended Cycle luminaire (sold separately).
STRUCTURE :	Acoustic panels are composed of a light, rigid and ecological synthetic felt. Made from recycled and recyclable polyester (PET) fibers that have low VOCs, no formaldehyde, are non-irritable and odourless.
COMPATIBILITY :	Can be installed on suspended Cycle sizes 24, 36, 54. Not compatible with Cycle layers (4844) or Cycle wall or ceiling mounted (3800). Can be installed on suspended Cycle at angle up to 30 degrees.
CERTIFIED :	Acoustic: ASTM C423 0.65 NRC/SAA 0.66. Test RAL-A15-387 Riverbank Acoustical laboratories. Fire rating: Equivalent to C423 ASTM E-84/CAN ULC S102 Class A.
CONCEPTION :	S'intègre avec le luminaire Cycle pour améliorer la qualité sonore de votre espace de façon simple et non intrusive. Il est composé d'un matériau acoustique éprouvé qui contribue à absorber les sons nuisibles se reflétant dans une pièce.
INSTALLATION :	S'installe rapidement et sans outils sur un luminaire Cycle suspendu (vendu séparément).
STRUCTURE :	Panneau acoustique fait de feutre synthétique rigide, léger et écologique. Fait de fibres de polyéthylène (PET) recyclées et recyclables avec bas COV, sans formaldéhyde, non irritante et inodore.
COMPATIBILITÉ :	Peut être installé sur une suspension Cycle grandeur 24, 36, 54 (vendu séparément). N'est pas compatible avec le Cycle Layers (4844), murales ou plafonniers (3800). Peut être installé sur un Cycle suspendu jusqu'à 30 degrés d'angle.
CERTIFIÉ :	Acoustique: ASTM C423: NRC 0.65/SAA 0.66. Test RAL-A15-387 Laboratoires acoustiques Riverbank. Résistance Feu: Équivalent à ASTM E-84/CAN ULC S102 Classe A.


TONE 2990E

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES

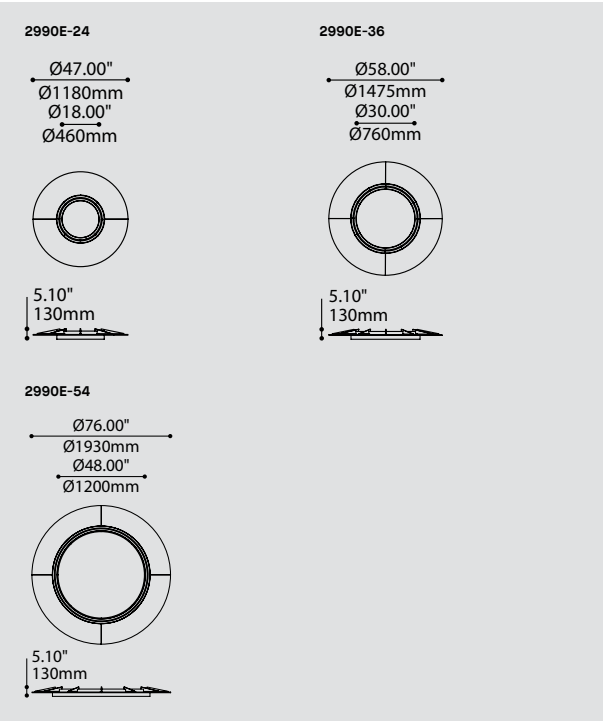

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP				
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL		MODÈLE ^(A)		
2990E-24	TONE EXTERIOR CHARCOAL FELT ~ 24"			
2990E-36	TONE EXTERIOR CHARCOAL FELT ~ 36"			
2990E-54	TONE EXTERIOR CHARCOAL FELT ~ 54"			
^(A) CYCLE SOLD SEPARATELY				
STRUCTURE FINISH		FINI STRUCTURE		CHF
CHF	CHARCOAL FELT			
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN :	A sound absorbing structure that installs onto the Cycle luminaire to improve the sound quality of your space. It uses a proven ecological sound absorbing material to reduce unwanted reflected sounds to dampen ambient noises.
INSTALLATION :	It installs quickly and without the need of tools on an existing suspended Cycle luminaire (sold separately).
STRUCTURE :	Acoustic panels are composed of a light, rigid and ecological synthetic felt. Made from recycled and recyclable polyester (PET) fibers that have low VOCs, no formaldehyde, are non-irritable and odourless.
COMPATIBILITY :	Can be installed on suspended Cycle sizes 24, 36, 54. Not compatible with Cycle layers (4844) or Cycle wall or ceiling mounted (3800). Can be installed on suspended Cycle at angle up to 30 degrees.
CERTIFIED :	Acoustic: ASTM C423 0.65 NRC/SAA 0.66. Test RAL-A15-387 Riverbank Acoustical laboratories. Fire rating: Equivalent to C423 ASTM E-84/CAN ULC S102 Class A.
CONCEPTION :	S'intègre avec le luminaire Cycle pour améliorer la qualité sonore de votre espace de façon simple et non intrusive. Il est composé d'un matériau acoustique éprouvé qui contribue à absorber les sons nuisibles se reflétant dans une pièce.
INSTALLATION :	S'installe rapidement et sans outils sur un luminaire Cycle suspendu (vendu séparément).
STRUCTURE :	Panneau acoustique fait de feutre synthétique rigide, léger et écologique. Fait de fibres de polyéthylène (PET) recyclées et recyclables avec bas COV, sans formaldéhyde, non irritante et inodore.
COMPATIBILITÉ :	Peut être installé sur une suspension Cycle grandeur 24, 36, 54 (vendu séparément). N'est pas compatible avec le Cycle Layers (4844), murales ou plafonniers (3800). Peut être installé sur un Cycle suspendu jusqu'à 30 degrés d'angle.
CERTIFIÉ :	Acoustique: ASTM C423: NRC 0.65/SAA 0.66. Test RAL-A15-387 Laboratoires acoustiques Riverbank. Résistance Feu: Équivalent à ASTM E-84/CAN ULC S102 Classe A.


TONE 2990I

QUICKSHIP

PROJECTPROJET

SPEC TYPE

NOTES

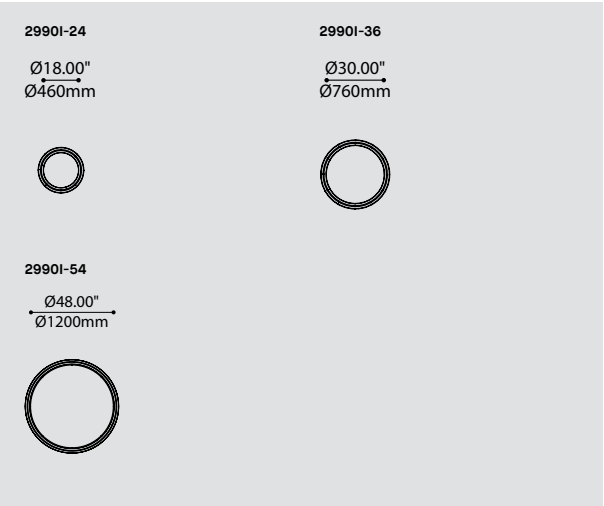

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP				
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS			QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS			QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL		MODÈLE ^(A)		
2990I-24	TONE INTERIOR CHARCOAL FELT ~ 24"			
2990I-36	TONE INTERIOR CHARCOAL FELT ~ 36"			
2990I-54	TONE INTERIOR CHARCOAL FELT ~ 54"			
^(A) CYCLE SOLD SEPARATELY				
STRUCTURE FINISH		FINI STRUCTURE		CHF
CHF	CHARCOAL FELT			
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN :	A sound absorbing structure that installs onto the Cycle luminaire to improve the sound quality of your space. It uses a proven ecological sound absorbing material to reduce unwanted reflected sounds to dampen ambient noises.
INSTALLATION :	It installs quickly and without the need of tools on an existing suspended Cycle luminaire (sold separately).
STRUCTURE :	Acoustic panels are composed of a light, rigid and ecological synthetic felt. Made from recycled and recyclable polyester (PET) fibers that have low VOCs, no formaldehyde, are non-irritable and odourless.
COMPATIBILITY :	Can be installed on suspended Cycle sizes 24, 36, 54. Not compatible with Cycle layers (4844) or Cycle wall or ceiling mounted (3800). Can be installed on suspended Cycle at angle up to 30 degrees.
CERTIFIED :	Acoustic: ASTM C423 0.65 NRC/SAA 0.66. Test RAL-A15-387 Riverbank Acoustical laboratories. Fire rating: Equivalent to C423 ASTM E-84/CAN ULC S102 Class A.
CONCEPTION :	S'intègre avec le luminaire Cycle pour améliorer la qualité sonore de votre espace de façon simple et non intrusive. Il est composé d'un matériau acoustique éprouvé qui contribue à absorber les sons nuisibles se reflétant dans une pièce.
INSTALLATION :	S'installe rapidement et sans outils sur un luminaire Cycle suspendu (vendu séparément).
STRUCTURE :	Panneau acoustique fait de feutre synthétique rigide, léger et écologique. Fait de fibres de polyéthylène (PET) recyclées et recyclables avec bas COV, sans formaldéhyde, non irritante et inodore.
COMPATIBILITÉ :	Peut être installé sur une suspension Cycle grandeur 24, 36, 54 (vendu séparément). N'est pas compatible avec le Cycle Layers (4844), murales ou plafonniers (3800). Peut être installé sur un Cycle suspendu jusqu'à 30 degrés d'angle.
CERTIFIÉ :	Acoustique: ASTM C423: NRC 0.65/SAA 0.66. Test RAL-A15-387 Laboratoires acoustiques Riverbank. Résistance Feu: Équivalent à ASTM E-84/CAN ULC S102 Classe A.



TWIN 4268

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES




FINISH FINI



BLKE

WHE

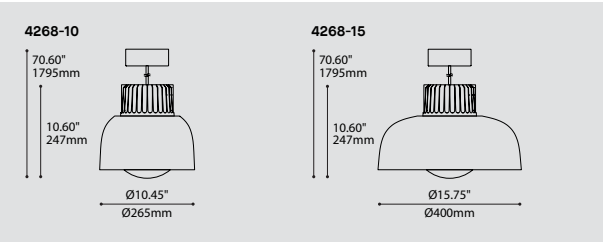

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4268-10 TWIN 10"
4268-15 TWIN 15"
4268-10-DD* TWIN 10" (DUAL DIMMING)
4268-15-DD* TWIN 15" (DUAL DIMMING)
* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
35 3500K
40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

80

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.

BEAM ANGLE ANGLE DE FAISCEAU

40 40° LENS

40

CABLE CABLE

C BLACK CABLE, FIELD ADJUSTABLE

C

CABLE LENGTH LONGUEUR DE CABLE

60 60" CABLE (STD LENGTH)
** CUSTOM CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE

SHADE FINISH FINI ABAT-JOUR (A) (B)

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE
(A) FINISH BETWEEN SHADES IS ALWAYS WHITE
(B) HEATSINK IS ALWAYS BLACK

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

QUICKSHIP

TWIN 4768

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE

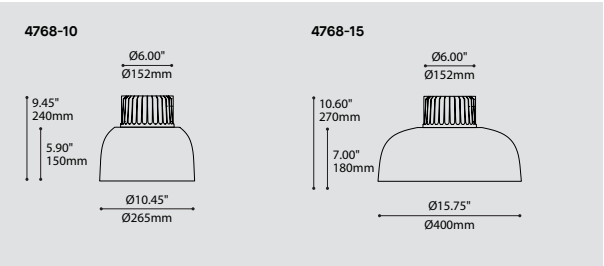

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL MODÈLE		
4768-10	TWIN 10"	
4768-15	TWIN 15"	
4768-10-DD*	TWIN 10" (DUAL DIMMING)	
4768-15-DD*	TWIN 15" (DUAL DIMMING)	
* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDENTLY		
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
BEAM ANGLE ANGLE DE FAISCEAU		40
40	40° LENS	
HEATSINK FINISH FINI RADIATEUR		BLKE
BLKE	BLACK FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR ^(A)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE		
ACCESSORY ACCESSOIRE		3983
3983	DEEP JUNCTION BOX	

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN :	Twin is a light fixture with a simple and charming shape composed of a double layered shade sheltering a soft halo of indirect light. The core of these two shades hides a powerful projector providing a strong direct light. Twin is available in two sizes and in a variety of colorful finishes.
INSTALLATION :	Ceiling installation on deep junction box (supplied with light fixture).
LIGHT SOURCE :	Powerful LED projector with a 20° or 40° projection angle, and a circular LED module that projects a soft and cozy indirect light, diffused between the shades. Offered with phase or 0-10V gradation options.
STRUCTURE :	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED :	c-CSA-us, c-UL-us

TWIN 1208

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE

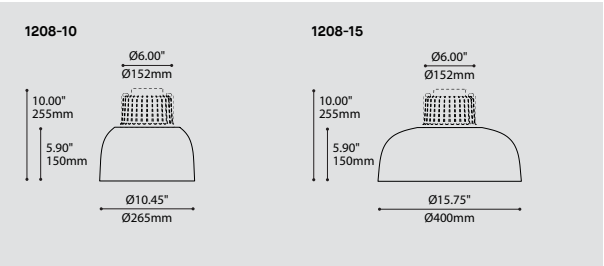

ORDERING SPECIFICATION			SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP				
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS			QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS			QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL		MODÈLE		
1208-10	TWIN 10"			
1208-15	TWIN 15"			
1208-10-DD*	TWIN 10" (DUAL DIMMING)			
1208-15-DD*	TWIN 15" (DUAL DIMMING)			
* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDENTLY				
LIGHT SOURCE		SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT			
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR		
30	3000K			
35	3500K			
40	4000K			
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI			
VOLTAGE		VOLTAGE		
120V	120 VOLT			
277V	277 VOLT			
DIMMING OPTION		OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)			
DP	PHASE DIMMING (120V ONLY)			
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.				
BEAM ANGLE		ANGLE DE FAISCEAU		40
40	40° LENS			
SHADE FINISH		FINI ABAT-JOUR ^(A)		
BLKE	BLACK FINE TEXTURE			
WHE	WHITE FINE TEXTURE			
^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE				

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS



DESIGN:	Twin is a light fixture with a simple and charming shape composed of a double layered shade sheltering a soft halo of indirect light. The core of these two shades hides a powerful projector providing a strong direct light. Twin is available in two sizes and in a variety of colorful finishes.
INSTALLATION:	Recessed mounting system allows for simple and secure installation in a variety of ceiling types from 0.375" (9.5mm) to 2.75" (70mm) thick, accommodating renovation projects.
LIGHT SOURCE:	Powerful LED projector with a 20° or 40° projection angle, and a circular LED module that projects a soft and cozy indirect light, diffused between the shades. Offered with phase or 0-10V gradation options.
STRUCTURE:	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED:	c-CSA-us





TUMBLER 3409

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES

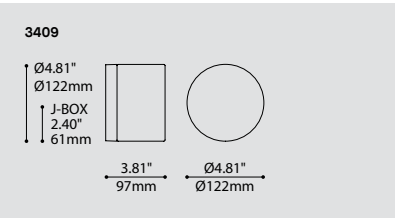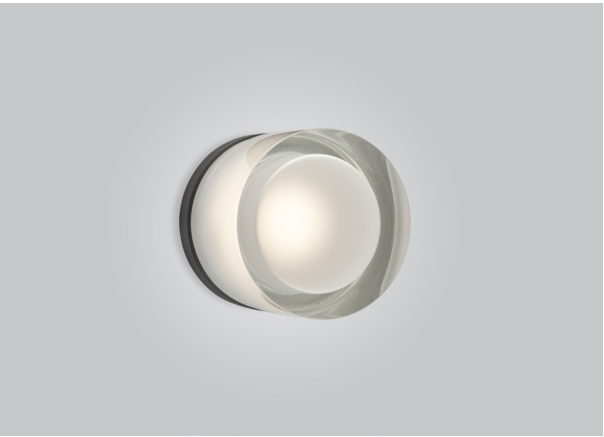

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL	MODÈLE		3409
3409	TUMBLER		
LIGHT SOURCE	SOURCE LUMINEUSE		
LED.4	4W, LED		
LED.8	8W, LED		
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR		
30	3000K		
35	3500K		
40	4000K		
VOLTAGE	VOLTAGE		
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION	OPTION DE GRADATION		
DV *	0-10V DIMMING (120V-277V)		
DP *	PHASE DIMMING (120V ONLY)		
	* 3983 ACCESSORY IS PROVIDED FOR DIMMING OPTION		
STRUCTURE FINISH	FINI STRUCTURE		
ANTE	ANTHRACITE FINE TEXTURE		
BLKE	BLACK FINE TEXTURE		
DIFFUSER FINISH	FINI DIFFUSEUR		CFR
CFR	CLEAR - FROSTED		
ACCESSORY	ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR DIMMING OPTION)		
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD			

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Tumbler is a small jewel made from tough machined glass. Its crisp, minimal form provides seamless accent illumination for any indoor or outdoor environment. Custom designed energy saving LED light source. Tumbler has an integral heatsink and has been tested to assure a long lifetime.
LIGHT SOURCE:	
STRUCTURE:	Die-cast aluminum base with anthracite or black exterior grade fine texture finish.
DIFFUSER:	Designed to be both beautiful and durable, Tumbler is a machined heavy glass with an inside frosted surface for better diffusion.
CERTIFIED:	CSA Listed to US and Canadian safety standards; 25°C ambient and wet-locations. IP65 rated
CONCEPTION:	Le Tumbler est un petit bijou fait de verre machiné robuste. Sa forme géométrique minimaliste procure une lumière ambiante diffuse qui réhausse tout environnement intérieur ou extérieur.
SOURCE LUMINEUSE:	Modèle DEL conçu sur mesure à faible consommation. Le Tumbler intègre un dissipateur de chaleur testé pour prolonger sa durée de vie.
STRUCTURE:	Base en aluminium moulé sous pression finition peinture anthracite our noire finement texturée de grade extérieur.
DIFFUSER:	Conçu pour être à la fois beau et durable, le Tumbler est machiné à même un bloc de verre et est ensuite givré à l'intérieur pour une meilleure diffusion.
CERTIFIÉ:	Homologué CSA aux standards UL Canada et É.-U. - Température ambiante 25°C et emplacements mouillés. Conforme à la norme IP65



VALCO 4259

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES




FINISH FINI



ANTE

WHE

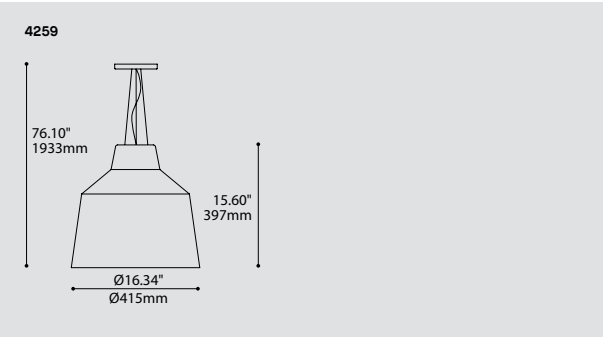

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
MODEL		MODÈLE	4259
4259		VALCO	
LIGHT SOURCE		SOURCE LUMINEUSE	LED.24
LED.24		24W, LED	
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR	
30		3000K	
35		3500K	
40		4000K	
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)	80
80		80+ CRI	
VOLTAGE		VOLTAGE	
120V		120 VOLT	
277V		277 VOLT	
DIMMING OPTION		OPTION DE GRADATION	
DV		0-10V DIMMING (120V-277V)	
DP		PHASE DIMMING (120V ONLY)	
		LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
CABLE		CÂBLE	AC
AC		AIR-CRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH		LONGUEUR DE CÂBLE	
60		60" AIRCRAFT CABLE (STD LENGTH)	
**		CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
		FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
CANOPY FINISH		FINI PAVILLON	WHE
WHE		WHITE FINE TEXTURE	
SHADE FINISH		FINI ABAT-JOUR	
WHE		WHITE FINE TEXTURE	
ANTE		ANTHRACITE FINE TEXTURE	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD			

PRODUCT CHARACTERISTICS

CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN:	The minimalist silhouette distinguishes itself by its unique lines which gives it a contemporary tone. Suspended alone or in a group, Valco creates a soft and comfortable illumination throughout the room.
INSTALLATION:	Easy to install, adjust and level triple aircraft cable mounting.
LIGHT SOURCE:	24W custom LED light engine supplied with a standard dimming driver (0-10V or phase).
STRUCTURE:	Die-formed steel canopy with a machined aluminum diffuser support.
SHADE:	Custom spun aluminum shade anthracite or white architectural grade fine texture finishes.
CERTIFIED:	c-CSA-us
CONCEPTION:	Ce luminaire à la silhouette épurée se distingue par ses arrêtes prononcées qui lui donnent un ton actuel. Suspendu seul ou en groupe, il crée une douce illumination à travers la pièce.
INSTALLATION:	Câbles de retenue en acier facilitant l'installation, l'ajustement et la mise à niveau.
SOURCE LUMINEUSE:	Module lumineux DEL de 24W fait sur mesure et unité d'alimentation à intensité variable standard (0-10V ou phase).
STRUCTURE:	Structure d'acier et support à diffuseur usiné en aluminium.
ABAT-JOUR:	Abat-jour en métal repoussé avec une peinture anthracite ou blanche finement texturée de grade architectural.
CERTIFIÉ:	c-CSA-us

VERNER 4273-14

QUICKSHIP

PROJECTPROJET

SPEC TYPE

NOTES




FINISHFINI



BLKE



WHE

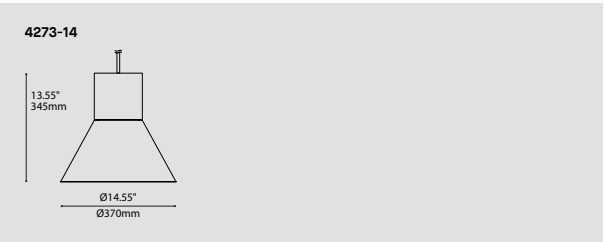

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL	MODÈLE	4273-14
4273-14	VERNER	
LIGHT SOURCE	SOURCE LUMINEUSE	
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI	
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
STEM OR CABLE	TIGE OU CABLE	C
C	CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTH	LONGUEUR DE TIGE OU CABLE	
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
CANOPY FINISH	FINI PAVILLON	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH	FINI ABAT-JOUR ^{(A)(B)}	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
^(A) SHADE INTERIOR IS ALWAYS WHITE		
^(B) SHADE FINISH DICTATES THE CABLE COLOR		
DIFFUSER FINISH	FINI DIFFUSEUR	WH
WH	WHITE	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN:	Verner, at its core, is a powerful light engine fused to a timeless geometric aluminum shell. A diffusion dome hidden inside the shade create a uniform illumination.
INSTALLATION:	Single power cable or stem for a minimalist look.
LIGHT SOURCE:	A highly powerful COB type light source project a light, softened by a polymer diffusion dome to create an illumination that is efficient, yet soft to the eye. Offered with phase or 0-10V dimming options.
STRUCTURE:	Thick extruded aluminium tube with a slotted top to let the heat escape.
SHADE:	Precision spun aluminum shade, with a white internal finish for optimal light reflection.
CERTIFIED:	c-CSA-us, c-UL-us



www.eurekalighting.com