



**A simple, elegant shape that stands the test of time. The outer reflector of each Cycle fixture provides perfectly diffused direct/indirect illumination to create luminous halos. Cycle creates a visual effect that can be both playful and powerful.**



Dot Foods, Inc. Headquarters, Mt.  
Sterling, Illinois USA,  
Photographer: Ben Romang →



**GRANDS  
PRIX  
DU DESIGN**

INDOOR  
**Next  
Generation**  
LUMINAIRES



2014 Innovation  
Awards Winner  
**Bronze**  
IIDEXCanada

 **EUREKA**





31-42



# MORE THAN A SUSPENSION




Cycle is a broad family of products. Available in four diameters (24", 36", 54" and 72"), three mounting types (ceiling surface, wall surface and suspension) and three finishes (anthracite, white and gold) Cycle offers a range of essential options with its simple form factor.

For a similar aesthetics but in a larger size, Cycle-XL is available in 115" and 152" diameters.  
More details [here](#).



# COLORFUL POSSIBILITIES

Cycle is offered with an optional blue or red finish inside the external ring enabling designer to add an extra pop of color. Cycle can also be painted any RAL colors. Contact factory for more details.

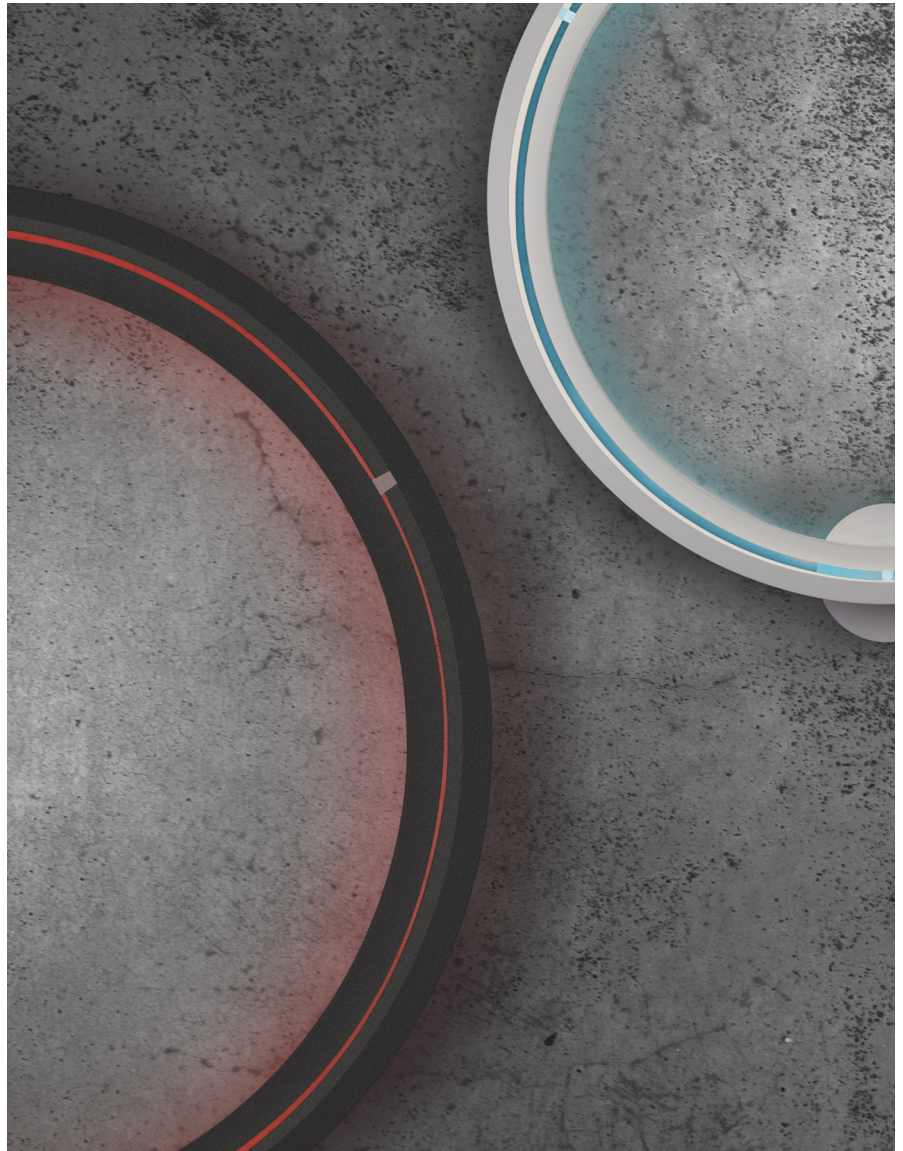



# LIGHTING OPTIONS

Cycle comes with several control options. Choose from nLight® AIR or nLight® Wired lighting control solutions, nTune or through standard 0-10V or phase dimming.



Three different light outputs in four CCT are available. Cycle is also available in a white tunable option.

### Color temperatures



### Tunable white









# ANGLED OR STRAIGHT



Cycle can be mounted straight or angled. With various sizes and finishes to choose from, designers can create compelling schemes across a ceiling expanse.



# CYCLE ACOUSTIC

Cycle Acoustic is a Cycle luminaire with added acoustic panels for the interior, the exterior, or both to adapt to the acoustic and aesthetic requirements of a space. With any configuration, the panels do not interfere with the emitted light of its host. 29 acoustic material colors are available.







Photo credits: Tom Arban Photography Inc.






# Acoustic Material Color Options for Cycle Acoustic

## Standard colors




**ABF**  
Azure Blue



**BBF**  
Basic Black



**BOF**  
Blood Orange




**BTF**  
Battleship Gray



**BYF**  
Banana Yellow




**CHF**  
Charcoal



**NBF**  
Navy Blue



**OBF**  
Ocean Blue




**PGF**  
Pear Green



**REF**  
Red



**SGF**  
Silver Gray



**TGF**  
Titanium Gray



**ZFF**  
Zinfandel


## Premium colors




**BGF**  
Bubble Gum




**BKF**  
Bark Brown



**DBF**  
Denim Blue



**DTF**  
Deep Teal Green




**DYF**  
Daisy Yellow




**GGF**  
Grass Green




**LBF**  
Light Beige



**LGF**  
Lime Green



**MGF**  
Moss Green




**OAF**  
Oak Brown



**PBF**  
Peanut Brown



**PNF**  
Pinot Noir



**PPF**  
Plum Purple



**SBF**  
Sky Blue



**TOF**  
Tangerine Orange



**TPF**  
Tulip Purple

— Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.  
— Due to the dye process, colors may vary slightly from batch to batch.



# CYCLE LAYERS

To give a chandelier feel, designers can take advantage of Cycle's scalability to expand the lighting aesthetic into striking composition of rings.



4844-2-36-24



4844-3-36-54-36



4844-2-54-36




4844-2-36-24-SH



4844-3-54-72-54



4844-2-54-36-SH



4844-3-54-36-24



4844-3-36-36-36



4844-3-72-54-36



4844-3-72-72-72









**QUICKSHIP** 

For more details , see the quickship spec sheet and our terms & conditions.



# TECHNICAL DATA - SUSPENDED 4800

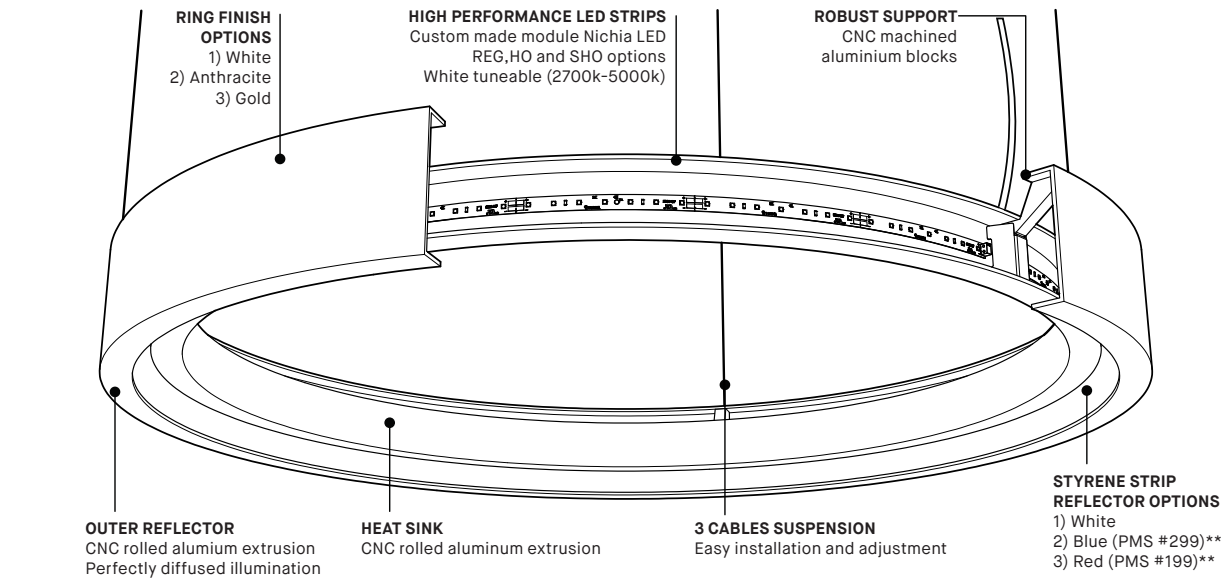

**4 VERSATILE SIZES**  
 An infinite number of possible layouts  
 From the smallest to the largest space



**CANOPY POSITION**


**4800-XX**  
 Centered with mounting point (standard)

**4800-XX-RCA**  
 Centered with luminaire / Centered cables


**4800-XX-RCC**  
 Centered with luminaire / Straight cables



**STANDARD CANOPY 9.4"X1.88"**  
 Mounting on a 4" standard j-box



**LOW PROFILE CANOPY 6.4"X0.25"**  
 Mounting on Eureka box 3981C (sold separately)  
 Recessed driver for discreet installation



**LOW PROFILE CANOPY 9.4"X0.25"**  
 Mounting on Eureka box 3981D (sold separately)  
 Recessed driver for discreet installation



**NTUNE CANOPY 9.4"X1.875"**  
 Mounting on a 4" standard j-box

**CANOPY OPTIONS**


## PRODUCT SPECIFICATION

	<b>4800-24</b> TW/REG/HO/SHO	<b>4800-36</b> TW/REG/HO/SHO	<b>4800-54</b> TW/REG/HO/SHO	<b>4800-72</b> TW/REG/HO/SHO
<b>PERFORMANCE</b>				
<b>SYSTEM WATTAGE</b>	15.7 W / 19.2 W / 40.7 W / 62.4 W	26.1 W / 30.5 W / 76.8 W / 62.4 W	40.3 W / 48.3 W / 108 W / 165.3 W	55.4 W / 64.9 W / 128.8 W / 199.9 W
<b>DELIVERED LUMENS (4000K) WHE</b>	1216 / 1343 / 2722 / 3428	2026 / 2276 / 5220 / 6586	3242 / 3663 / 7462 / 10596	4458 / 5059 / 9924 / 14756
<b>DELIVERED LUMENS (4000K) ANTE OR GOL</b>	868 / 961 / 1944 / 2449	1371 / 1518 / 3478 / 4382	2300 / 2544 / 5181 / 7371	3263 / 3611 / 7104 / 10560
<b>OTHER INFORMATIONS</b>				
<b>LUMINAIRE'S WEIGHT</b>	15LBS / 7 KG	21 LBS / 10 KG	33 LBS / 15 KG	45 LBS / 20 KG
<b>L70 (LUMEN MAINTENANCE) TW / REG-HO-SHO</b>	54 700 / 60 000 HRS	54 700 / 60 000 HRS	54 700 / 60 000 HRS	54 700 / 60 000 HRS
<b>MAX. LUMINANCE 45°-90° OF NADIR</b>	2049 CD/M <sup>2</sup> (SHO)	2336 CD/M <sup>2</sup> (SHO)	2241 CD/M <sup>2</sup> (SHO)	2041 CD/M <sup>2</sup> (SHO)
<b>LIGHT QUALITY</b>	R9 > 50	R9 > 50	R9 > 50	R9 > 50

## EFFICACY MULTIPLIERS

CRI	CCT	FACTOR	TW FACTOR
80+	5000K	-	0.93
80+	4000K	-	1.00
80+	3500K	-	0.99
80+	3000K	-	0.98
80+	2700K	-	0.91
90+	4000K	1.00	-
90+	3500K	0.96	-
90+	3000K	0.92	-
90+	2700K	0.87	-

## LIGHT DISTRIBUTION



Visit our website for warranty terms and conditions.




# CYCLE 4800

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI

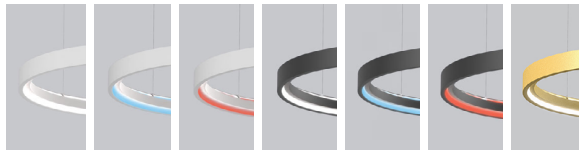

WHE-WH WHE-BLU WHE-RED ANTE-WH ANTE-BLU ANTE-RED GOL-WH

## FAMILY FAMILLE



3800 (WALL SURFACE) 3800 (CEILING SURFACE) 4844-2 / 4844-3



4801-E 4801-EI 4801-I

## MOUNTING OPTIONS OPTIONS DE MONTAGE

RC1 (RDP) Ø6.35" x 0.25" Ø161 x 6mm	RC2 (RDP) Ø9.4" x 0.25" Ø240 x 6mm	RC3 Ø9.30" x 1.88" Ø236 x 48mm	RC4 Ø12.00" x 1.88" Ø305 x 48mm

## MOUNTING CABLE OPTIONS OPTIONS DE MONTAGE DE CÂBLE

4800 64.00" 1625mm	4800-RCA 64.00" 1625mm	4800-RCC 64.00" 1625mm	
4800-24 Ø3.37" Ø87mm	4800-36 Ø3.37" Ø87mm	4800-54 Ø3.37" Ø87mm	4800-72 Ø3.42" Ø87mm
4.00" 102mm	4.00" 102mm	4.00" 102mm	4.00" 102mm

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	
4800-24	CYCLE 24"
4800-36	CYCLE 36"
4800-54	CYCLE 54"
4800-72	CYCLE 72"
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	
LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT
LED.SHO	SUPER HIGH OUTPUT
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	
27	2700K
30	3000K
35	3500K
40*	4000K
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET	
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>	90
90	90+ (R)
<b>VOLTAGE VOLTAGE</b>	
120V	120 VOLT
277V	277 VOLT
347V*	347 VOLT
* ONLY AVAILABLE WITH REGULAR OUTPUT LIGHT SOURCE	
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>	
DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS. EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS	
<b>EMERGENCY BATTERY BATTERIE D'URGENCE</b>	
FOR 120-277V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX
* 3981EA ACCESSORY IS REQUIRED	
<b>DRIVER POSITION POSITION DU PILOTE</b>	
RDP*	RECESSED DRIVER
* 3981C (FOR 24, 36 REG & HO, 54 REG, 72 REG) OR 3981D (FOR 36 SHO, 54 HO & SHO, 72 HO & SHO) ACCESSORY IS REQUIRED	
<b>CABLE CÂBLE</b>	AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>	
60	60" AIRCRAFT CABLE (STD LENGTH)
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
<b>MOUNTING OPTION OPTION DE MONTAGE</b>	
ROUND CANOPY / PAVILLON ROND	
RC1	FOR RECESSED DRIVER OPTION (FOR 24, 36 REG & HO, 54 REG, 72 REG): Ø6.35" X 0.25" (2403B)
RC2	FOR RECESSED DRIVER OPTION (FOR 36 SHO, 54 HO & SHO, 72 HO & SHO): Ø9.4" X 0.25" (2405B)
RC3	FOR STANDARD (24, 36 REG&HO, 54, 72 REG & HO): Ø9.42" X 1.88" (2475I)
RC4	FOR STANDARD (36 SHO & 72 SHO): Ø12.00" X 1.88" CANOPY (2477I)
<b>MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE</b>	
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES TO CENTER
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES
* NOT AVAILABLE WITH RECESSED DRIVER (RDP) IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
<b>CANOPY FINISH FINI PAVILLON</b>	
WHE	WHITE FINE TEXTURE
ANTE	ANTHRACITE FINE TEXTURE
GOL	GOLD
<b>RING FINISH FINI ANNEAU</b>	
WHE	WHITE FINE TEXTURE
ANTE	ANTHRACITE FINE TEXTURE
GOL	GOLD
RAL*	PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR</b>	
BLU	BLUE
RED	RED
IF NO OPTION IS SELECTED, THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE	
<b>ACCESSORY ACCESSOIRE</b>	
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 24, 36 REG & HO, 54 REG, 72 REG)
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 36 SHO, 54 HO & SHO, 72 HO & SHO)
39NLAA	NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA	NLIGHT WIRED REMOTE POWER PACK
<b>EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE</b>	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

# CYCLE 4800 TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI

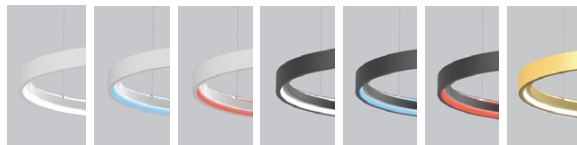


WHE-WH WHE-BLU WHE-RED ANTE-WH ANTE-BLU ANTE-RED GOL-WH

## FAMILY FAMILLE




3800 (WALL SURFACE) 3800 (CEILING SURFACE) 4844-2 / 4844-3

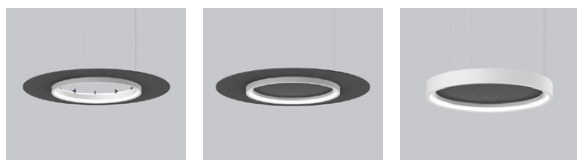


4801-E 4801-EI 4801-I

## MOUNTING OPTIONS OPTIONS DE MONTAGE



## MOUNTING CABLE OPTIONS OPTIONS DE MONTAGE DE CÂBLE

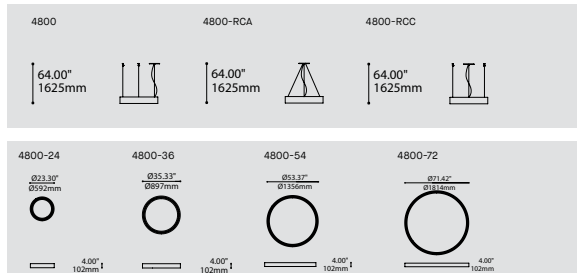


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>		
4800-24	CYCLE 24"	
4800-36	CYCLE 36"	
4800-54	CYCLE 54"	
4800-72	CYCLE 72"	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		<b>LED</b>
LED	REGULAR OUTPUT	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		<b>TW</b>
TW*	TUNABLE WHITE (2700K TO 5000K) * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		<b>80</b>
80	80+ CRI	
<b>VOLTAGE VOLTAGE</b>		
120V	120 VOLT	
277V	277 VOLT	
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>		
DV	DUAL 0-10V DIMMING	
NLT	NLIGHT NTUNE CONTROL	
<b>CABLE CÂBLE</b>		<b>AC</b>
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>MOUNTING OPTION OPTION DE MONTAGE</b>		<b>RC</b>
RC	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY 09.42" X 1.88" (2475i)	
<b>MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE</b>		
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER	
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES * NOT AVAILABLE WITH RECESSED DRIVER (RDP) IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
<b>CANOPY FINISH FINI PAVILLON</b>		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
GOL	GOLD	
<b>RING FINISH FINI ANNEAU</b>		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
GOL	GOLD	
RAL*	PLEASE SPECIFY RAL CODE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR</b>		
BLU	BLUE	
RED	RED IF NO OPTION IS SELECTED, THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE	


## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT





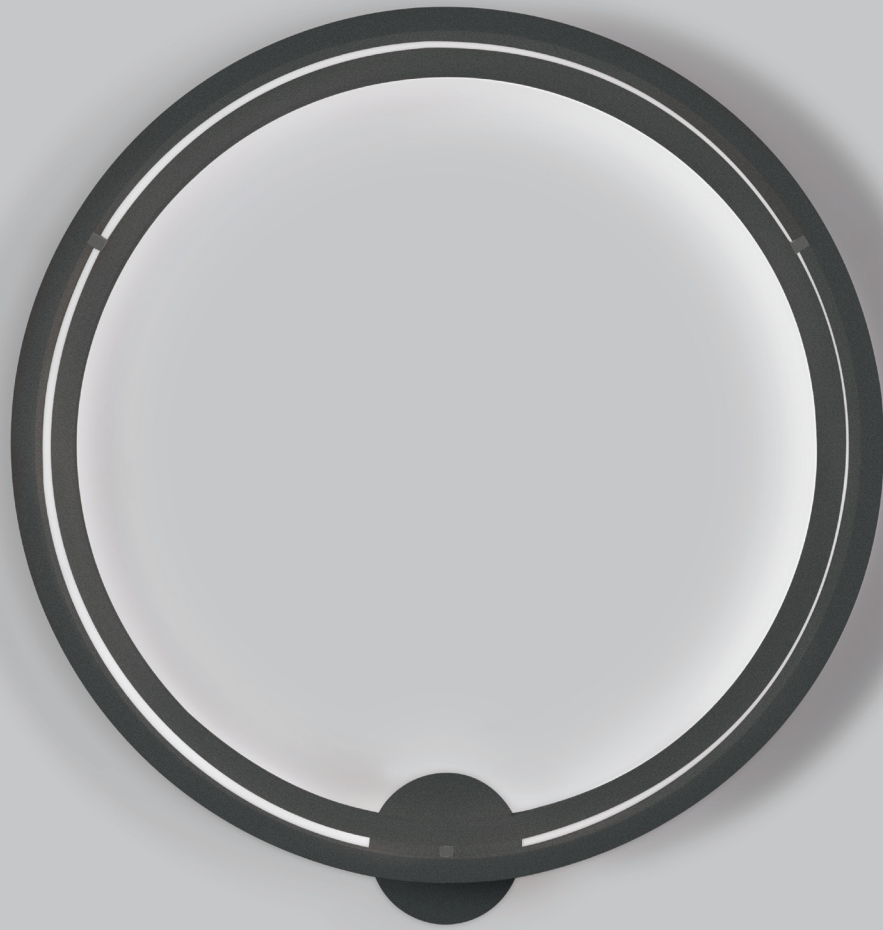

# TECHNICAL DATA – SURFACE 3800

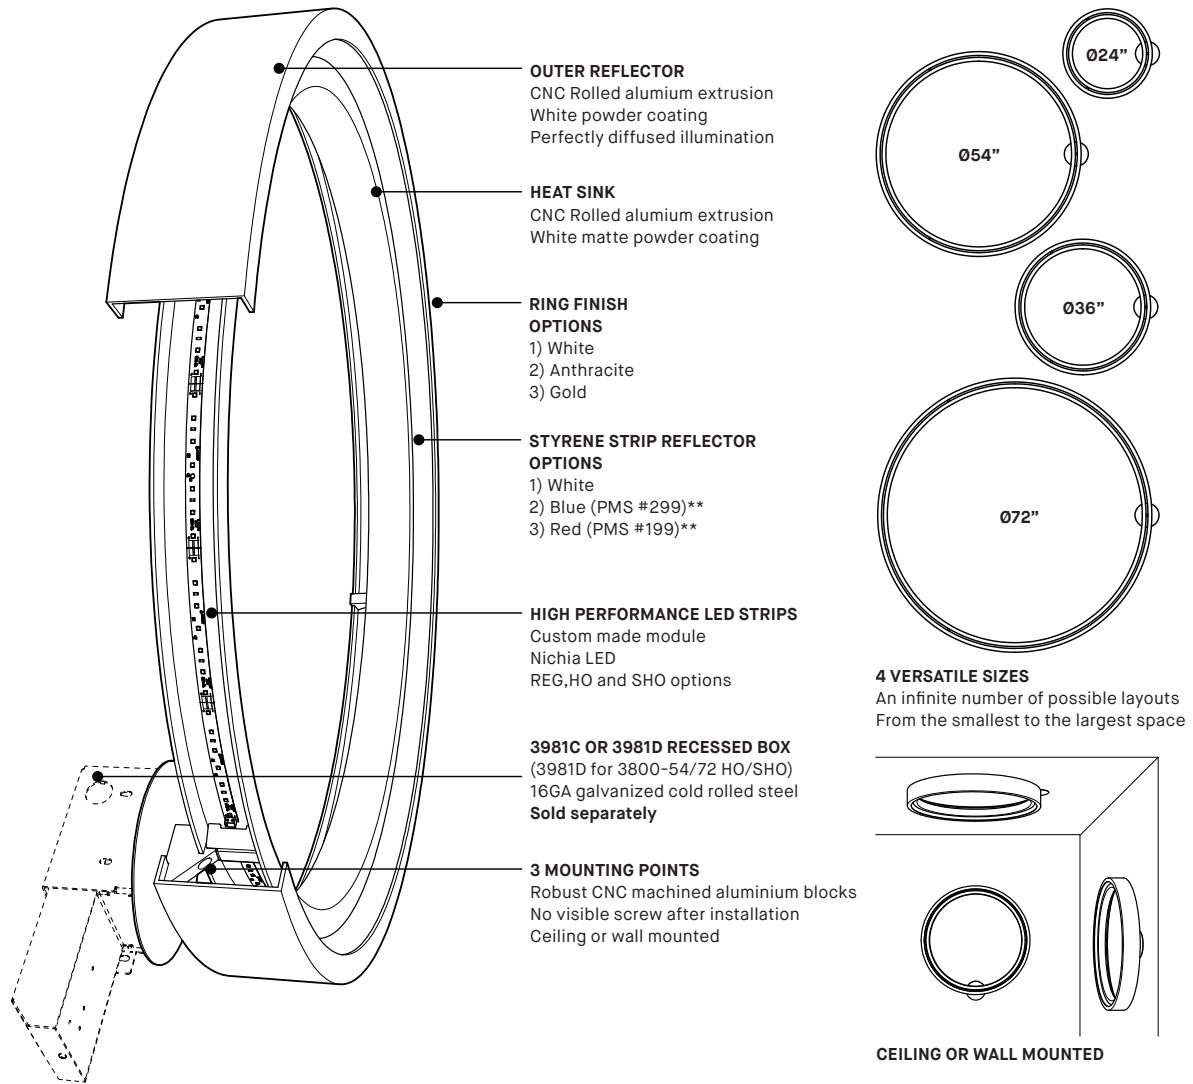


PRODUCT SPECIFICATION	3800-24 REG/HO/SHO	3800-36 REG/HO/SHO	3800-54 REG/HO/SHO	3800-72 REG/HO/SHO
<b>PERFORMANCE</b>				
<b>SYSTEM WATTAGE</b>	19.2 W / 40.7 W / 62.4 W	30.5 W / 76.8 W / 62.4 W	48.3 W / 108 W / 165.3 W	64.9 W / 128.8 W / 199.9 W
<b>DELIVERED LUMENS (4000K) WHE</b>	1343 / 2722 / 3428	2276 / 5220 / 6586	3663 / 7462 / 10596	5059 / 9924 / 14756
<b>DELIVERED LUMENS (4000K) ANTE OR GOL</b>	961 / 1944 / 2449	1518 / 3478 / 4382	2544 / 5181 / 7371	3611 / 7104 / 10560
<b>OTHER INFORMATIONS</b>				
<b>LUMINAIRE'S WEIGHT</b>	15LBS / 7KG	21LBS / 10KG	33LBS / 15KG	45LBS / 20KG
<b>L70 (LUMEN MAINTENANCE)</b>	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

## EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.92
90+	2700K	0.87

## LIGHT DISTRIBUTION




Visit our website for warranty terms and conditions.





# CYCLE 3800

PROJECT PROJÉT
SPEC TYPE
NOTES

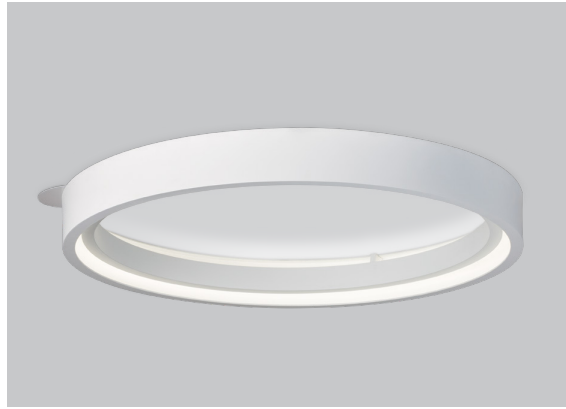

## FINISH FINI

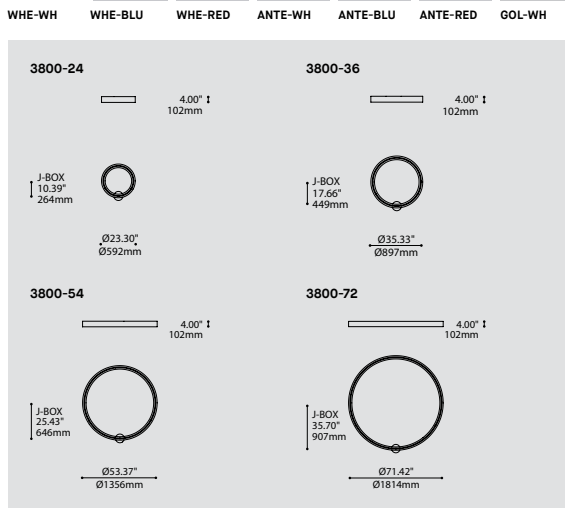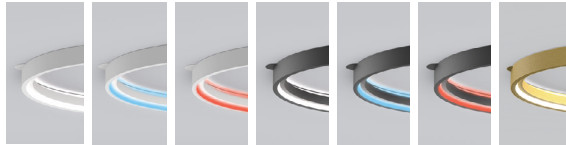

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>		
3800-24	CYCLE 24"	
3800-36	CYCLE 36"	
3800-54	CYCLE 54"	
3800-72	CYCLE 72"	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
LED.SHO*	SUPER HIGH OUTPUT	
	* NOT AVAILABLE WITH DP CONTROL OPTION	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE FOR TUNEABLE WHITE, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		<b>90</b>
90	90+ CRI	
<b>VOLTAGE VOLTAGE</b>		
120V	120 VOLT	
277V	277 VOLT	
<b>CONTROL OPTION OPTION DE CONTRÔL</b>		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT). *EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
<b>EMERGENCY BATTERY BATTERIE D'URGENCE</b>		
	FOR 120-277V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	*3981EA ACCESSORY IS REQUIRED	
<b>DRIVER POSITION POSITION DU PILOTE</b>		<b>RDP</b>
RDP*	RECESSED DRIVER	
	*3981C OR 3981D ACCESSORY IS REQUIRED	
<b>CANOPY FINISH FINI PAVILLON</b>		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
GOL	GOLD	
<b>RING FINISH FINI ANNEAU</b>		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
GOL	GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR</b>		
BLU	BLUE	
RED	RED	
	IF NO OPTION IS SELECTED, THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE	
<b>ACCESSORY ACCESSOIRE</b>		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 3800-24, 3800-36 (REG & HO), 3800-54 (REG), 3800-72 (REG))	
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 3800-36 (SHO), 3800-54 (HO & SHO), 3800-72 (HO & SHO))	
39NLAA	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA	NLIGHT WIRED REMOTE POWER PACK	
<b>EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE</b>		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



# CYCLE 3800

PROJECT PROJÉT
SPEC TYPE
NOTES




CEILING SURFACE PLAFONNIER



FINISH FINI



WHE-WH WHE-BLU WHE-RED ANTE-WH ANTE-BLU ANTE-RED GOL-WH

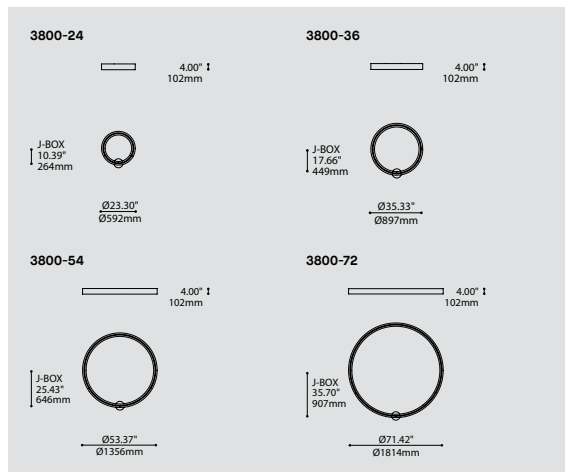

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
3800-24	CYCLE 24"
3800-36	CYCLE 36"
3800-54	CYCLE 54"
3800-72	CYCLE 72"

LIGHT SOURCE SOURCE LUMINEUSE	CODE
LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT
LED.SHO*	SUPER HIGH OUTPUT
* NOT AVAILABLE WITH DP CONTROL OPTION	

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
27	2700K
30	3000K
35	3500K
40*	4000K
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE FOR TUNEABLE WHITE, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	CODE
90	90+ CRI

VOLTAGE VOLTAGE	CODE
120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE CONTRÔL	CODE
DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT). *EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	

EMERGENCY BATTERY BATTERIE D'URGENCE	CODE
EMB*	EMERGENCY BATTERY FOR REMOTE BOX
*3981EA ACCESSORY IS REQUIRED	

FOR 120-277V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

DRIVER POSITION POSITION DU PILOTE	RDP
RDP*	RECESSED DRIVER
*3981C OR 3981D ACCESSORY IS REQUIRED	

CANOPY FINISH FINI PAVILLON	CODE
WHE	WHITE FINE TEXTURE
ANTE	ANTHRACITE FINE TEXTURE
GOL	GOLD

RING FINISH FINI ANNEAU	CODE
WHE	WHITE FINE TEXTURE
ANTE	ANTHRACITE FINE TEXTURE
GOL	GOLD
RAL*	PLEASE SPECIFY RAL CODE
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR	CODE
BLU	BLUE
RED	RED
IF NO OPTION IS SELECTED, THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE	

ACCESSORY ACCESSOIRE	CODE
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 3800-24, 3800-36 (REG & HO), 3800-54 (REG), 3800-72 (REG))
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 3800-36 (SHO), 3800-54 (HO & SHO), 3800-72 (HO & SHO))
39NLAA	NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA	NLIGHT WIRED REMOTE POWER PACK

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE	CODE
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT







 EUREKA


Daymark Uptown Apartments, Minneapolis, Minnesota, USA  
Photographer: Teskey Mediaworks



# TECHNICAL DATA - LAYERS 4844




**EASY INSTALLATION**  
Mounts to standard junction box with added mounting points to reinforce installation




**SIMPLE**  
Large canopy with plenty of room to house all electrical components for quick assembly


**CENTER PIECE**  
Matte black recessed center hole to hide mounting hardware

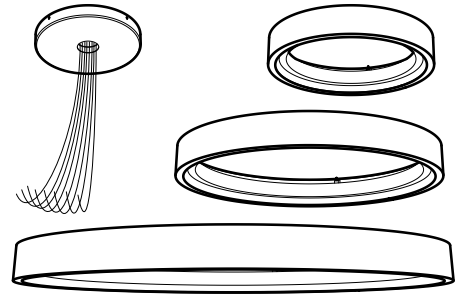


**EASY ON-SITE INSTALLATION**  
Rings can easily be attached to canopy with the help of swivelable grippers and plug & play components




**CONFIGURATIONS**  
Numerous 2 & 3 rings options with different sizes  
Color & REG, HO & SHO options available

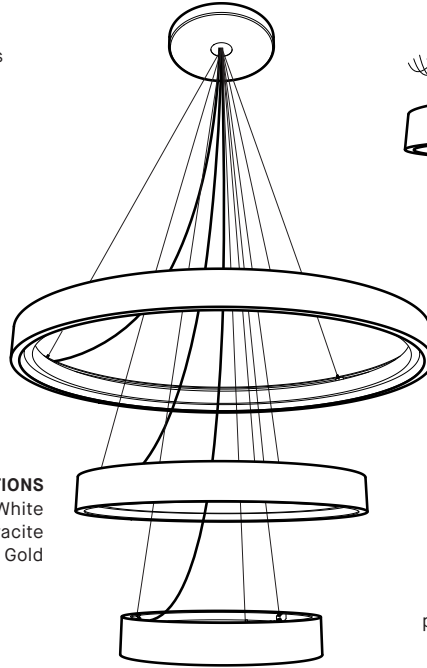

**RING FINISH OPTIONS**  
1) White  
2) Anthracite  
3) Gold




**SWIVELABLE GRIPPERS**  
Integrated in each ring  
Facilitate leveling at luminaire height  
Locking mechanism to prevent accidental cable re-adjustment

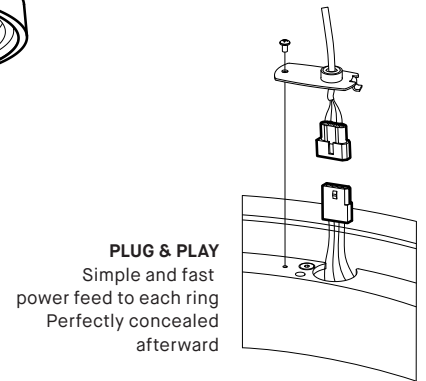

**PLUG & PLAY**  
Simple and fast power feed to each ring  
Perfectly concealed afterward

**CONFIGURATION OPTIONS:**

- 4844-2-36-24-SH
- 4844-2-36-24
- 4844-3-36-36-36
- 4844-3-54-36-24
- 4844-3-36-54-36
- 4844-2-54-36-SH
- 4844-2-54-36
- 4844-3-72-72-72
- 4844-3-72-54-36
- 4844-3-54-72-54

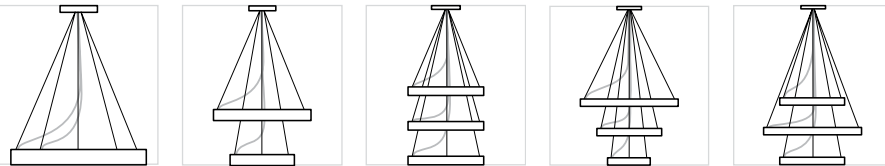


**PRODUCT SPECIFICATION**

	<b>RING-24 REG/HO/SHO</b>	<b>RING-36 REG/HO/SHO</b>	<b>RING-54 REG/HO/SHO</b>	<b>RING-72 REG/HO/SHO</b>
<b>PERFORMANCE</b>				
<b>SYSTEM WATTAGE</b>	19.2 W / 40.7 W / 62.4 W	30.5 W / 76.8 W / 62.4 W	48.3 W / 108 W / 165.3 W	64.9 W / 128.8 W / 199.9 W
<b>DELIVERED LUMENS (4000K) WHE</b>	1343 / 2722 / 3428	2276 / 5220 / 6586	3663 / 7462 / 10596	5059 / 9924 / 14756
<b>DELIVERED LUMENS (4000K) ANTE OR GOL</b>	961 / 1944 / 2449	1518 / 3478 / 4382	2544 / 5181 / 7371	3611 / 7104 / 10560
<b>OTHER INFORMATION</b>				
<b>RING'S WEIGHT</b>	15LBS / 7KG	21 LBS / 10 KG	33LBS / 15KG	45LBS / 20 KG
<b>L70 (LUMEN MAINTENANCE)</b>	60 000 HRS	60 000 HRS	60 000 HRS	60 000 HRS

**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.92
90+	2700K	0.87

**LIGHT DISTRIBUTION**



Visit our website for warranty terms and conditions.






# CYCLE LAYERS 4844-2


PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI

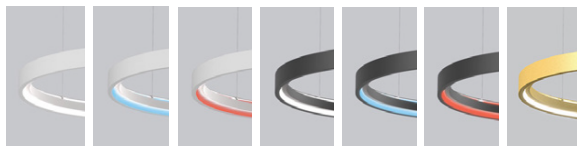

WHE-WH WHE-BLU WHE-RED ANTE-WH ANTE-BLU ANTE-RED GOL-WH

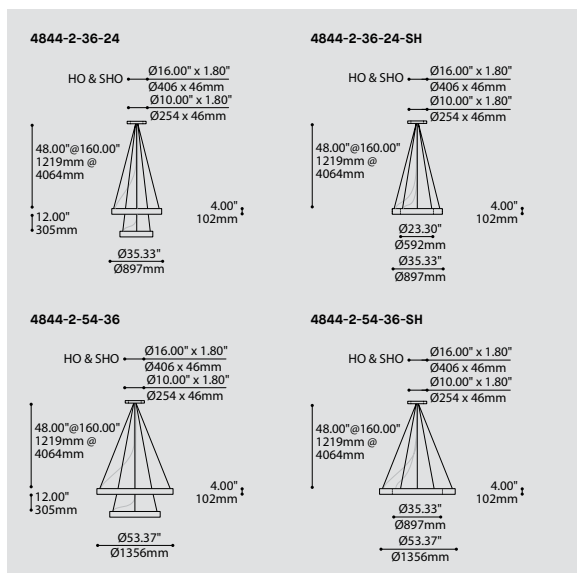

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>		<b>4844-2</b>
<b>4844-2</b>	CYCLE LAYERS – 2 RINGS	
<b>RINGS DIAMETER DIAMÈTRE D'ANNEAUX</b>		
<b>36-24</b>	TOP RING 36" – BOTTOM RING 24"	
<b>54-36</b>	TOP RING 54" – BOTTOM RING 36"	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		
<b>LED</b>	REGULAR OUTPUT	
<b>LED.HO</b>	HIGH OUTPUT	
<b>LED.SHO</b>	SUPER HIGH OUTPUT	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
<b>27</b>	2700K	
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40*</b>	4000K	
*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE FOR TUNEABLE WHITE, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		<b>90</b>
<b>90</b>	90+ CRI	
<b>VOLTAGE VOLTAGE</b>		
<b>120V</b>	120 VOLT	
<b>277V</b>	277 VOLT	
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>		
<b>DV</b>	0-10V DIMMING (120V-277V)	
<b>DP</b>	PHASE DIMMING (120V ONLY)	
<b>NLTAIR2*</b>	NLIGHT AIR CONTROL GEN 2	
<b>NLIGHT*</b>	NLIGHT WIRED CONTROL	
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
<b>CABLE CÂBLE</b>		<b>AC</b>
<b>AC</b>	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH LONGUEUR DE CÂBLE (A)</b>		
<b>60</b>	60" AIRCRAFT CABLE (STD LENGTH)	
<b>**</b>	CUSTOM AIRCRAFT CABLE LENGTH FROM 48" TO 160" (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
(A) ALL DISTANCES BETWEEN RINGS WILL BE 12" EXCEPT IF SAME HEIGHT OPTION IS SELECTED		
<b>SAME HEIGHT RINGS OPTION OPTION D'ANNEAUX DE MÊME HAUTEUR</b>		
<b>SH</b>	SAME HEIGHT RINGS OPTION / OPTION D'ANNEAUX À LA MÊME HAUTEUR	
<b>MOUNTING OPTION OPTION DE MONTAGE</b>		<b>RC</b>
<b>RC</b>	ROUND CANOPY / PAVILLON ROND FOR STANDARD: 10" CANOPY FOR HIGH AND SUPER HIGH OUTPUT: 16" CANOPY	
<b>CANOPY FINISH FINI PAVILLON</b>		
<b>WHE</b>	WHITE FINE TEXTURE	
<b>ANTE</b>	ANTHRACITE FINE TEXTURE	
<b>GOL</b>	GOLD	
<b>RING FINISH FINI ANNEAU</b>		
<b>WHE</b>	WHITE FINE TEXTURE	
<b>ANTE</b>	ANTHRACITE FINE TEXTURE	
<b>GOL</b>	GOLD	
<b>RAL*</b>	PLEASE SPECIFY RAL CODE	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR</b>		
<b>BLU</b>	BLUE	
<b>RED</b>	RED	
IF NO OPTION IS SELECTED, THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE ALL INSIDE FINISH OF RING WILL BE THE SAME		
<b>ACCESSORY ACCESSOIRE</b>		
<b>39NLAA</b>	NLIGHT AIR GEN 2 REMOTE POWER PACK	
<b>39NLWA</b>	NLIGHT WIRED REMOTE POWER PACK	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT













# CYCLE LAYERS 4844-3

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI

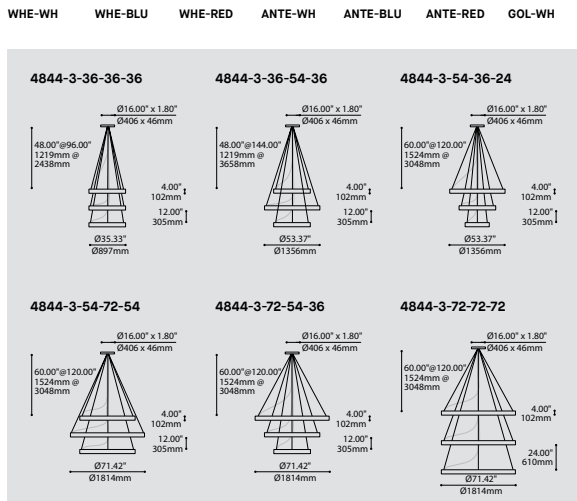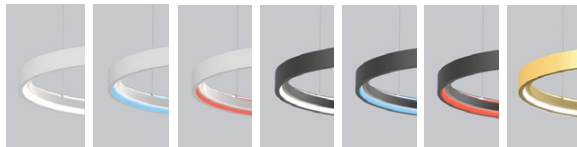

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	<b>4844-3</b>
<b>4844-3</b>	CYCLE LAYERS – 3 RINGS
<b>RINGS DIAMETER DIAMÈTRE D'ANNEAUX</b>	
<b>36-36-36</b>	TOP RING 36" – MIDDLE RING 36" – BOTTOM RING 36"
<b>36-54-36</b>	TOP RING 36" – MIDDLE RING 54" – BOTTOM RING 36"
<b>54-36-24</b>	TOP RING 54" – MIDDLE RING 36" – BOTTOM RING 54"
<b>54-72-54</b>	TOP RING 54" – MIDDLE RING 72" – BOTTOM RING 54"
<b>72-54-36</b>	TOP RING 72" – MIDDLE RING 54" – BOTTOM RING 36"
<b>72-72-72</b>	TOP RING 72" – MIDDLE RING 72" – BOTTOM RING 72"
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	
<b>LED</b>	REGULAR OUTPUT
<b>LED.HO</b>	HIGH OUTPUT
<b>LED.SHO</b>	SUPER HIGH OUTPUT
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	
<b>27</b>	2700K
<b>30</b>	3000K
<b>35</b>	3500K
<b>40*</b>	4000K
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE FOR TUNEABLE WHITE. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>	<b>90</b>
<b>90</b>	90+ CRI
<b>VOLTAGE VOLTAGE</b>	
<b>120V</b>	120 VOLT
<b>277V</b>	277 VOLT
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>	
<b>DV</b>	0-10V DIMMING (120V-277V)
<b>DP</b>	PHASE DIMMING (120V ONLY)**
<b>NLTAIR2*</b>	NLIGHT AIR CONTROL GEN 2
<b>NLIGHT*</b>	NLIGHT WIRED CONTROL
** NOT AVAILABLE FOR THESE CONFIGURATIONS IN HIGH OR SUPER HIGH OUTPUT: 54-72-54, 74-54-36, 72-72-72	
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
<b>CABLE CÂBLE</b>	<b>AC</b>
<b>AC</b>	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE
<b>CABLE LENGTH LONGUEUR DE CÂBLE (2)</b>	
FOR RINGS DIAMETER 36-36-36	
<b>60</b>	60" AIRCRAFT CABLE (STD LENGTH)
<b>**</b>	CUSTOM AIRCRAFT CABLE LENGTH FROM 48" TO 96" (PLEASE SPECIFY)
FOR RINGS DIAMETER 36-54-36	
<b>60</b>	60" AIRCRAFT CABLE (STD LENGTH)
<b>**</b>	CUSTOM AIRCRAFT CABLE LENGTH FROM 48" TO 144" (PLEASE SPECIFY)
FOR RINGS DIAMETER 54-36-54 / 54-72-54 / 72-54-36 / 72-72-72	
<b>60</b>	60" AIRCRAFT CABLE (STD LENGTH)
<b>**</b>	CUSTOM AIRCRAFT CABLE LENGTH FROM 60" TO 120" (PLEASE SPECIFY)
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
(2) ALL DISTANCES BETWEEN RINGS WILL BE 12". IF RING DIAMETER 72-72-72 IS SELECTED, DISTANCE WILL BE 24".	
<b>MOUNTING OPTION OPTION DE MONTAGE</b>	<b>RC</b>
<b>RC</b>	ROUND CANOPY / PAVILLON ROND 16" CANOPY
<b>CANOPY FINISH FINI PAVILLON</b>	
<b>WHE</b>	WHITE FINE TEXTURE
<b>ANTE</b>	ANTHRACITE FINE TEXTURE
<b>GOL</b>	GOLD
<b>RING FINISH FINI ANNEAU</b>	
<b>WHE</b>	WHITE FINE TEXTURE
<b>ANTE</b>	ANTHRACITE FINE TEXTURE
<b>GOL</b>	GOLD
<b>RAL*</b>	PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR</b>	
<b>BLU</b>	BLUE
<b>RED</b>	RED
IF NO OPTION IS SELECTED, THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE ALL INSIDE FINISH OF RING WILL BE THE SAME	
<b>ACCESSORY ACCESSOIRE</b>	
<b>39NLAA</b>	NLIGHT AIR GEN 2 REMOTE POWER PACK
<b>39NLWA</b>	NLIGHT WIRED REMOTE POWER PACK



# TECHNICAL DATA - ACOUSTIC 4801



**NOISE REDUCTION**  
Cycle acoustic is a sound absorbing fixture designed to reduce unwanted reverberating noises.

**TESTED RESULTS**

Tested at the renowned Riverbank Acoustic Labs, Cycle acoustic achieved a Sound Absorption Coefficient ( $\alpha$ ) of 0.67 and an NRC of 0.65<sup>1</sup>. For more information, please refer to Acoustic documentation.

**RING FINISH OPTIONS**


- 1) White
- 2) Anthracite
- 3) Gold

**COLORS**

Available in 13 standard colors and 16 Premium colors, For all color options, refer to the Acoustic Material Color Options page.

**TUNE YOUR ABSORPTION**

Cycle acoustic is available in three options to adapt to your sound absorption needs:




<sup>1</sup> ASTM C423-09a test report RAL-A15-347 by Riverbank Acoustical Laboratories  
<sup>2</sup> ASTM C423 test report B3493.1 by National Research Council Canada

**CLEANING**

A proper and regular cleaning will help extend the lifespan of acoustic products. Remove dust with a vacuum cleaner and light stains with a damp cloth. For greasy and deep stains, a professional dry clean is recommended. Do not use any abrasive, soap, or chemical cleaner.

**BOTTOM VIEW**

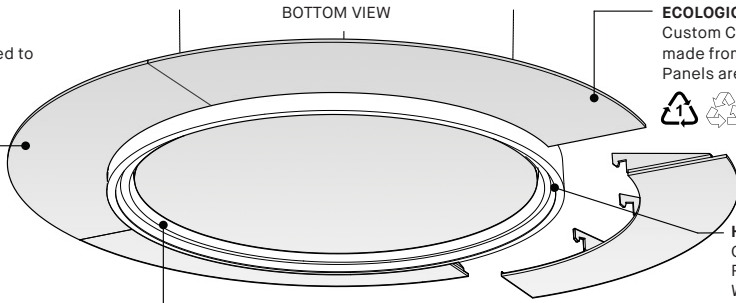

**ECOLOGICAL**

Custom CNC cut polyester felt panels made from recycled bottles (PET). Panels are also recyclable



**HIGH PERFORMANCE LED STRIPS**

Custom made module Nichia LED REG,HO and SHO options  
White tuneable (2700k-5000k)

**CANOPY POSITION**



**4800-XX**  
Centered with mounting point (standard)




**4800-XX-RCA**  
Centered with luminaire / Centered cables




**4800-XX-RCC**  
Centered with luminaire / Straight cables


**CANOPY OPTIONS**




**STANDARD CANOPY 9.0"X1.75"**  
Mounting on a 4" standard j-box



**LOW PROFILE CANOPY 6.4"X0.25"**  
Mounting on Eureka box 3981C (sold separately)  
Recessed driver for discreet installation



**LOW PROFILE CANOPY 9.4"X0.25"**  
Mounting on Eureka box 3981D (sold separately)  
Recessed driver for discreet installation




**NTUNE CANOPY 9.4"X1.875"**  
Mounting on a 4" standard j-box

PRODUCT SPECIFICATION	4801-24-XX TW/REG/HO/SHO	4801-36-XX TW/REG/HO/SHO	4801-54-XX TW/REG/HO/SHO	4801-72-XX TW/REG/HO/SHO
<b>PERFORMANCE</b>				
<b>SYSTEM WATTAGE</b>	15.7 W / 19.2 W / 40.7 W / 62.4 W	26.1 W / 30.5 W / 76.8 W / 62.4 W	40.3 W / 48.3 W / 108 W / 165.3 W	55.4 W / 64.9 W / 128.8 W / 199.9 W
<b>DELIVERED LUMENS (4000K) WHE</b>	1216 / 1343 / 2722 / 3428	2026 / 2276 / 5220 / 6586	3242 / 3663 / 7462 / 10596	4458 / 5059 / 9924 / 14756
<b>DELIVERED LUMENS (4000K) ANTE OR GOL</b>	868 / 961 / 1944 / 2449	1371 / 1518 / 3478 / 4382	2300 / 2544 / 5181 / 7371	3263 / 3611 / 7104 / 10560
*10% LIGHT LOSS WITH INTERIOR PANEL				
<b>OTHER INFORMATIONS</b>				
<b>LUMINAIRE'S WEIGHT (INT.+EXT.)</b>	19 LBS / 9KG	27 LBS / 12 KG	43 LBS / 19 KG	64 LBS / 29 KG
<b>L70 (LUMEN MAINTENANCE)</b>	> 54 700 HRS / > 60 000 HRS	> 54 700 HRS / > 60 000 HRS	> 54 700 HRS / > 60 000 HRS	> 54 700 HRS / > 60 000 HRS
<b>MAX. LUMINANCE 45°-90° OF NADIR</b>	2019 (SHO) CD/M²	1999 (SHO) CD/M²	1552 (SHO) CD/M²	1220 (SHO) CD/M²
<b>LIGHT QUALITY</b>	R9 > 50	R9 > 50	R9 > 50	R9 > 50
<b>FELT</b>	HIGH DENSITY 9MM POLYESTER FELT			
<b>ACOUSTIC</b>	ACOUSTIC MATERIAL RATED AT 0.75 N			
<b>FIRE RATING</b>	ASTM E84-13 (FELT MATERIAL ONLY)			

**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR	TW FACTOR
80+	5000K	-	0.93
80+	4000K	-	1.00
80+	3500K	-	0.99
80+	3000K	-	0.98
80+	2700K	-	0.91
90+	4000K	1.00	-
90+	3500K	0.96	-
90+	3000K	0.92	-
90+	2700K	0.87	-

**LIGHT DISTRIBUTION**




Visit our website for warranty terms and conditions.







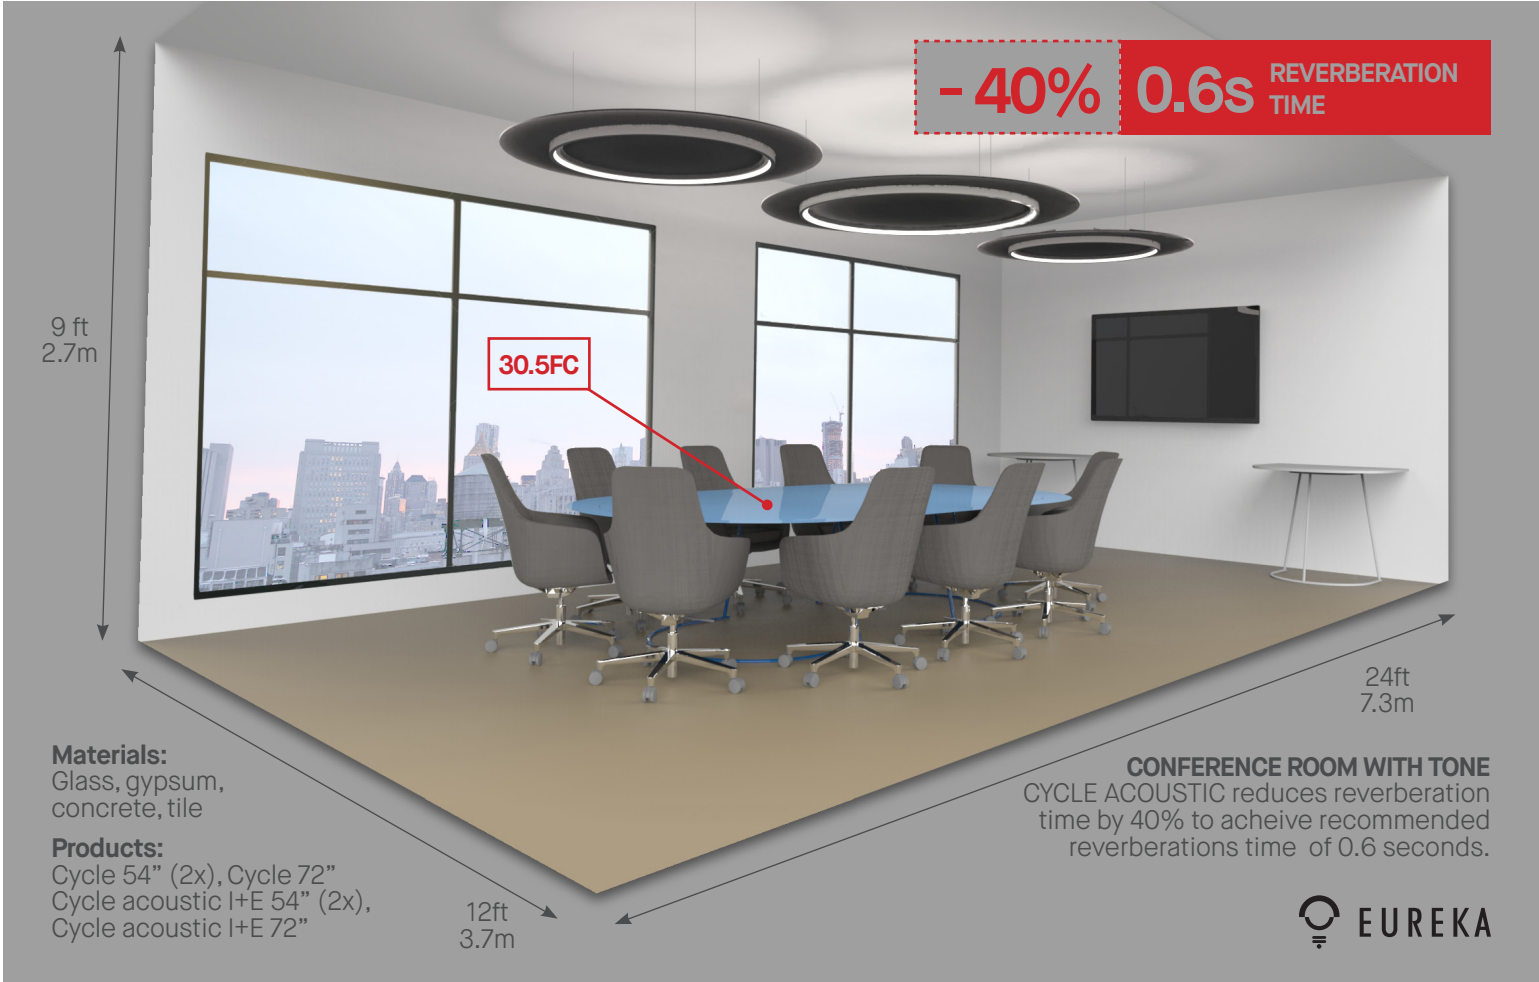

# ACOUSTICAL LAB RESULTS

Test: ASTM C423-09a : Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method. Full lab report available on request.

Test lab: Riverbank Acoustical Laboratories : NVLAP, ISO 17025:2005. Test number RAL-A15-347


## Absorption Coefficient

Frequency : Hz

Apparent NRC



Apparent SAA

.21	.39	.53	.73	.98	1.11	1.23
125	250	500	1000	2000	4000	8000
0.65						
0.67						




### CYCLE ACOUSTIC INTERIOR + EXTERIOR

Aeq : Equivalent sound absorption Area in m<sup>2</sup>

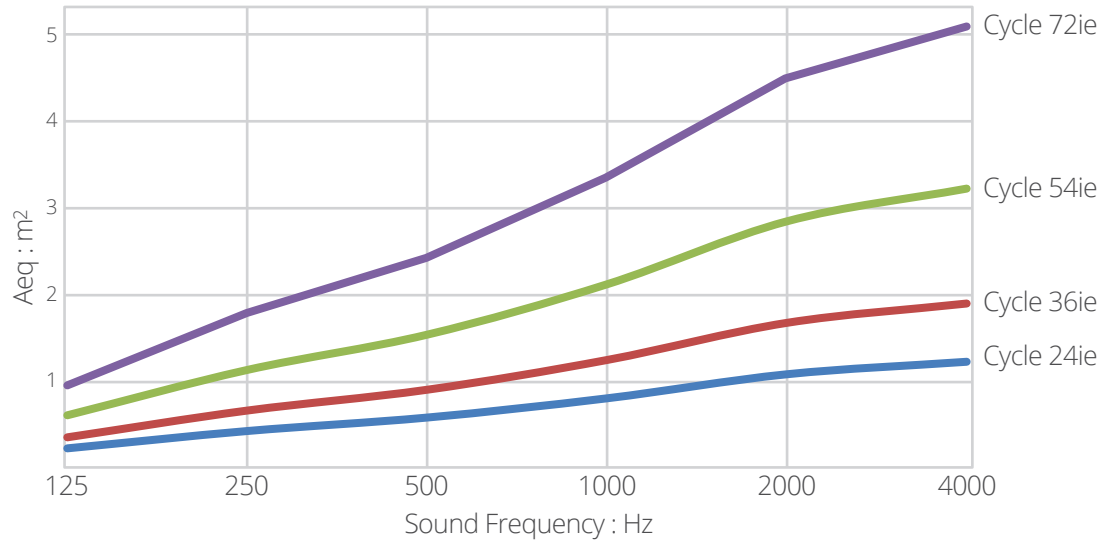


### CYCLE ACOUSTIC EXTERIOR

Aeq : Equivalent sound absorption Area in m<sup>2</sup>

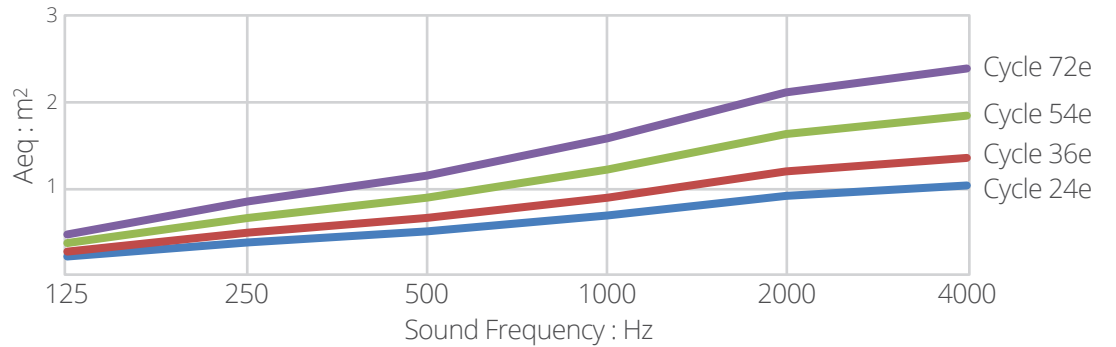

### CYCLE ACOUSTIC INTERIOR


Aeq : Equivalent sound absorption Area in m<sup>2</sup>

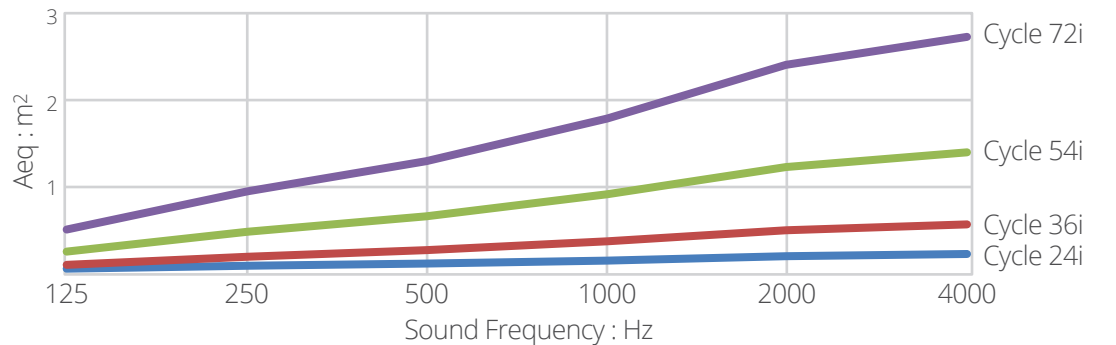



# CYCLE ACOUSTIC 4801

PROJECT PROJÉT
SPEC TYPE
NOTES

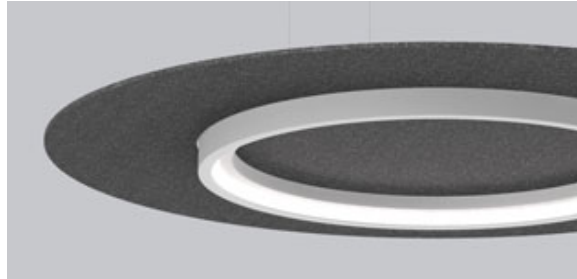

## OPTIONS



EXTERIOR

EXTERIOR-INTERIOR

INTERIOR

## FAMILY FAMILLE



3800 (WALL SURFACE)

3800 (WALL SURFACE)

4844-2 / 4844-3


4800

## FELT FINISH FINI FEUTRE



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

## RING FINISH FINI ANNEAU




WHE

ANTE

GOL

## MOUNTING OPTIONS OPTIONS DE MONTAGE




RC1 (RDP)  
Ø6.35" x 0.25"  
Ø161 x 6mm

RC2 (RCA)  
Ø9.4" x 0.25"  
Ø240 x 6mm

RC3  
Ø9.4" x 1.88"  
Ø239 x 48mm

RC4  
Ø12.00" x 1.88"  
Ø305 x 48mm

## MOUNTING CABLE OPTIONS OPTIONS DE MONTAGE DE CÂBLE



4801

4801-RCA

4801-RCC

64.00"  
1625mm

64.00"  
1625mm

64.00"  
1625mm

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

## ORDERING SPECIFICATION (PAGE 1/2) SPÉCIFICATION DE COMMANDE (PAGE 1/2) CODE

MODEL MODÈLE		
4801-24	CYCLE ACOUSTIC 24"	
4801-36	CYCLE ACOUSTIC 36"	
4801-54	CYCLE ACOUSTIC 54"	
4801-72	CYCLE ACOUSTIC 72"	

ACOUSTIC OPTION OPTION ACOUSTIQUE		
I	INTERIOR FELT	
E	EXTERIOR FELT	
EI	EXTERIOR-INTERIOR FELT	

LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
LED.SHO	SUPER HIGH OUTPUT	

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNEABLE WHITE ALSO AVAILABLE, SEE TUNEABLE WHITE SPEC SHEET		

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	

VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
347V*	347 VOLT	
*ONLY AVAILABLE WITH REGULAR OUTPUT LIGHT SOURCE		

CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS. EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS		

EMERGENCY BATTERY BATTERIE D'URGENCE		
FOR 120-277V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY, SEE EM GUIDE FOR DETAILS.		

EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
*3981EA ACCESSORY IS REQUIRED		

DRIVER POSITION POSITION DU PILOTE		
RDP*	RECESSED DRIVER	
*3981C (FOR 24, 36 REG & HO, 54 REG, 72 REG) OR 3981D (FOR 36 SHO, 54 HO & SHO, 72 HO & SHO) ACCESSORY IS REQUIRED		

CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	

CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC1	FOR RECESSED DRIVER OPTION (FOR 24, 36 REG & HO, 54 REG, 72 REG): Ø6.35" X 0.25" (2403B)	
RC2	FOR RECESSED DRIVER OPTION (FOR 36 SHO, 54 HO & SHO, 72 HO & SHO): Ø9.4" X 0.25" (2405B)	
RC3	FOR STANDARD (24, 36 REG&HO, 54, 72 REG & HO): Ø9.42" X 1.88" CANOPY (2475I)	
RC4	FOR STANDARD (36 SHO & 72 SHO): Ø12" X 1.88" CANOPY (2477I)	

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER	
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES	
*NOT AVAILABLE WITH RECESSED DRIVER (RDP) IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD		

CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
GOL	GOLD	

RING FINISH FINI ANNEAU		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
GOL	GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		

# CYCLE ACOUSTIC 4801

## ORDERING SPECIFICATION - (PAGE 2/2) SPÉCIFICATION DE COMMANDE (PAGE 2/2) CODE

### FELT FINISH FINI FEUTRE

<b>ABF</b>	AZURE BLUE FELT	<b>REF</b>	RED FELT	<b>SGF</b>	SILVER GRAY FELT
<b>BBF</b>	BASIC BLACK FELT	<b>CHF</b>	CHARCOAL FELT	<b>TGF</b>	TITANIUM GRAY FELT
<b>BOF</b>	BLOOD ORANGE FELT	<b>NBF</b>	NAVY BLUE FELT	<b>ZFF</b>	ZINFANDEL FELT
<b>BTF</b>	BATTLESHIP GRAY FELT	<b>OBF</b>	OCEAN BLUE FELT		
<b>BYF</b>	BANANA YELLOW FELT	<b>PGF</b>	PEAR GREEN FELT		
<b>PREMIUM*</b>	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				

### ACCESSORY ACCESSOIRE

<b>3981C</b>	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 24, 36 REG & HO, 54 REG, 72 REG)
<b>3981D</b>	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 36 SHO, 54 HO & SHO, 72 HO & SHO)
<b>39NLAA</b>	NLIGHT AIR GEN 2 REMOTE POWER PACK
<b>39NLWA</b>	NLIGHT WIRED REMOTE POWER PACK

### EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

<b>3981EA</b>	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY
---------------	--


### PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT





# CYCLE ACOUSTIC 4801 TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES

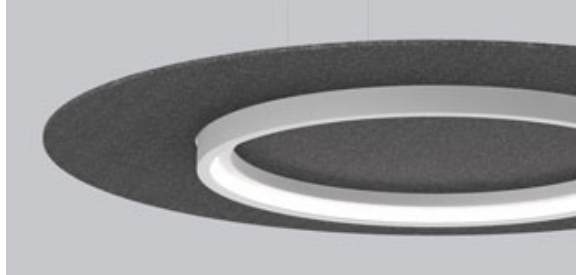

## OPTIONS



EXTERIOR

EXTERIOR-INTERIOR

INTERIOR

## FAMILY FAMILLE




3800 (WALL SURFACE)

3800 (WALL SURFACE)

4844-2 / 4844-3


4800

## FELT FINISH FINI FEUTRE

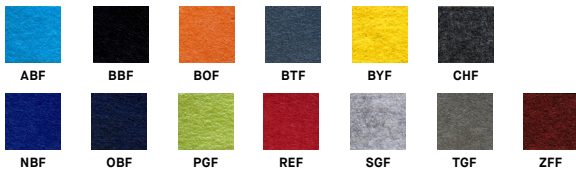

ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

## RING FINISH FINI ANNEAU




WHE


ANTE

GOL

## MOUNTING OPTIONS OPTIONS DE MONTAGE

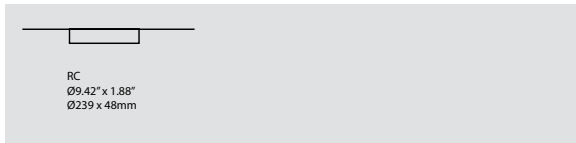

## MOUNTING CABLE OPTIONS OPTIONS DE MONTAGE DE CÂBLE



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
<b>MODEL MODÈLE</b>					
4801-24	CYCLE ACOUSTIC 24"				
4801-36	CYCLE ACOUSTIC 36"				
4801-54	CYCLE ACOUSTIC 54"				
4801-72	CYCLE ACOUSTIC 72"				
<b>ACOUSTIC OPTION OPTION ACOUSTIQUE</b>					
I	INTERIOR FELT				
E	EXTERIOR FELT				
EI	EXTERIOR-INTERIOR FELT				
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		<b>LED</b>			
LED	REGULAR OUTPUT				
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		<b>TW</b>			
TW*	TUNABLE WHITE (2700K TO 5000K) *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		<b>80</b>			
80	80+ CRI				
<b>VOLTAGE VOLTAGE</b>					
120V	120 VOLT				
277V	277 VOLT				
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>					
DV	DUAL 0-10V DIMMING				
NLT	NLIGHT NTUNE CONTROL				
<b>CABLE CÂBLE</b>		<b>AC</b>			
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE				
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
<b>MOUNTING OPTION OPTION DE MONTAGE</b>		<b>RC</b>			
RC	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY Ø9.42" X 1.88" (2475i)				
<b>MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE</b>					
RCA*	CENTERED ROUND CANOPY – AIRCRAFT CABLES ANGLED TO CENTER				
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES *NOT AVAILABLE WITH RECESSED DRIVER (RDP) IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD				
<b>CANOPY FINISH FINI PAVILLON</b>					
WHE	WHITE FINE TEXTURE				
ANTE	ANTHRACITE FINE TEXTURE				
GOL	GOLD				
<b>RING FINISH FINI ANNEAU</b>					
WHE	WHITE FINE TEXTURE				
ANTE	ANTHRACITE FINE TEXTURE				
GOL	GOLD				
RAL*	PLEASE SPECIFY RAL CODE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
<b>FELT FINISH FINI FEUTRE</b>					
ABF	AZURE BLUE FELT	REF	RED FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	CHF	CHARCOAL FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	NBF	NAVY BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	OBF	OCEAN BLUE FELT		
BYF	BANANA YELLOW FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				


## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




# CYCLE ACOUSTIC 4801 DIMENSIONS

4801-24-E

Ø47.00"  
Ø1180mm




5.10"  
130mm



4801-36-E

Ø58.00"  
Ø1475mm




5.10"  
130mm



4801-54-E

Ø76.00"  
Ø1930mm




5.10"  
130mm




4801-72-E

Ø95.00"  
Ø2400mm



5.10"  
130mm



4801-24-I

Ø18.00"  
Ø460mm




4.00"  
102mm

Ø23.30"  
Ø592mm

4801-36-I

Ø30.00"  
Ø760mm




4.00"  
102mm

Ø35.33"  
Ø897mm

4801-54-I

Ø48.00"  
Ø1200mm




4.00"  
102mm

Ø53.37"  
Ø1356mm

4801-72-I

Ø66.00"  
Ø1680mm




4.00"  
102mm


Ø71.42"  
Ø1814mm

4801-24-EI

Ø47.00"  
Ø1180mm  
Ø18.00"  
Ø460mm




5.10"  
130mm




4801-36-EI

Ø58.00"  
Ø1475mm  
Ø30.00"  
Ø760mm




5.10"  
130mm




4801-54-EI

Ø76.00"  
Ø1930mm  
Ø48.00"  
Ø1200mm




5.10"  
130mm




4801-72-EI

Ø95.00"  
Ø2400mm  
Ø66.00"  
Ø1680mm



5.10"  
130mm





# PHOTOMETRIC REPORT

## 4800-24-LED.TW.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 1215  
 System wattage (W)\*: 16.6  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 73  
 Photometric type: C

## 4800-24-LED.TW.REG-ANTE-WH

CCT (K): 4000  
 Delivered Lumens (lm): 868  
 System wattage (W)\*: 16.6  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 52  
 Photometric type: C

## 4800-24-LED.40.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 1343  
 System wattage (W)\*: 19  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 71  
 Photometric type: C

## 4800-24-LED.40.REG-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 961  
 System wattage (W)\*: 19  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 50  
 Photometric type: C

## 4800-24-LED.40.HO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 2722  
 System wattage (W)\*: 41  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 66  
 Photometric type: C

## 4800-24-LED.40.HO-ANTE



CCT (K): 4000  
 Delivered Lumens (lm): 1944  
 System wattage (W)\*: 41  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 47  
 Photometric type: C

## 4800-24-LED.40.SHO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 3428  
 System wattage (W)\*: 62  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 55  
 Photometric type: C

## 4800-24-LED.40.SHO-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 2449  
 System wattage (W)\*: 62  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 39  
 Photometric type: C

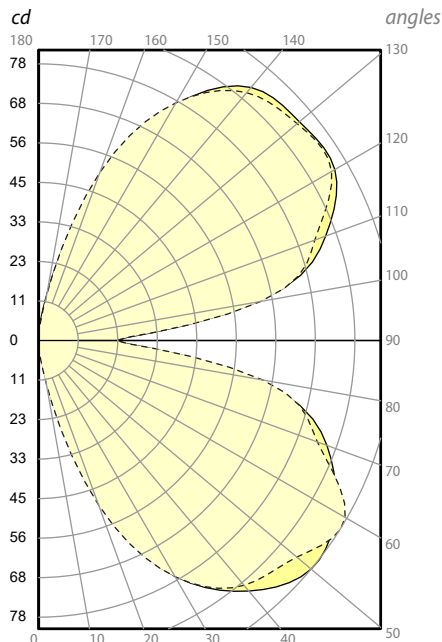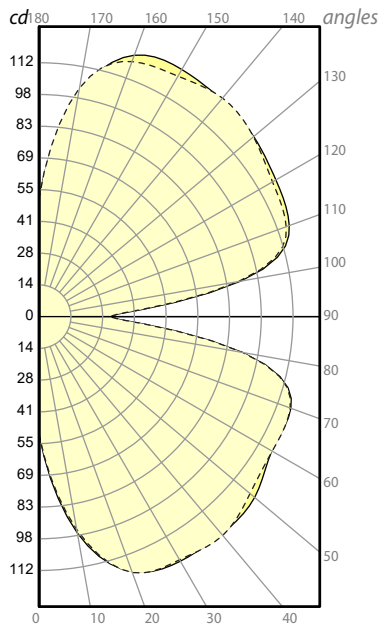

# PHOTOMETRIC REPORT

## 4800-36-LED.TW.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 2077  
 System wattage (W)\*: 27.7  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 75  
 Photometric type C

## 4800-36-LED.TW.REG-ANTE-WH

CCT (K): 4000  
 Delivered Lumens (lm): 1371  
 System wattage (W)\*: 27.7  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 49  
 Photometric type C

## 4800-36-LED.40.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 2275  
 System wattage (W)\*: 30  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 76  
 Photometric type C

## 4800-36-LED.40.REG-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 1518  
 System wattage (W)\*: 30  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 51  
 Photometric type C

## 4800-36-LED.40.HO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 5220  
 System wattage (W)\*: 77  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 68  
 Photometric type C

## 4800-36-LED.40.HO-ANTE



CCT (K): 4000  
 Delivered Lumens (lm): 3477  
 System wattage (W)\*: 77  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 45  
 Photometric type C

## 4800-36-LED.40.SHO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 6586  
 System wattage (W)\*: 102  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 64  
 Photometric type C

## 4800-36-LED.40.SHO-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 4381  
 System wattage (W)\*: 102  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 43  
 Photometric type C

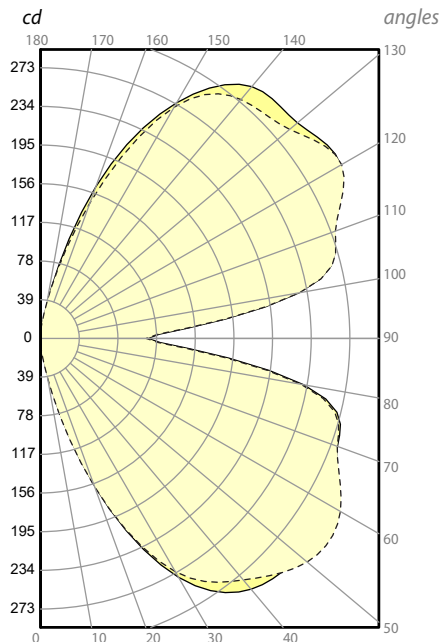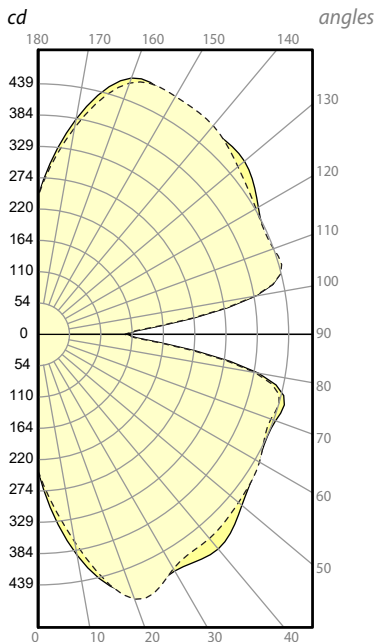



# PHOTOMETRIC REPORT

## 4800-54-LED.TW.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 3312  
 System wattage (W)\*: 44.3  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 75  
 Photometric type C

## 4800-54-LED.TW.REG-ANTE-WH

CCT (K): 4000  
 Delivered Lumens (lm): 2300  
 System wattage (W)\*: 44.3  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 52  
 Photometric type C

## 4800-54-LED.40.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 3662  
 System wattage (W)\*: 48  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 76  
 Photometric type C

## 4800-54-LED.40.REG-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 2544  
 System wattage (W)\*: 48  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 53  
 Photometric type C

## 4800-54-LED.40.HO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 7462  
 System wattage (W)\*: 108  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 69  
 Photometric type C

## 4800-54-LED.40.HO-ANTE



CCT (K): 4000  
 Delivered Lumens (lm): 5181  
 System wattage (W)\*: 108  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 48  
 Photometric type C

## 4800-54-LED.40.SHO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 10596  
 System wattage (W)\*: 165  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 64  
 Photometric type C

## 4800-54-LED.40.SHO-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 7371  
 System wattage (W)\*: 165  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 44  
 Photometric type C

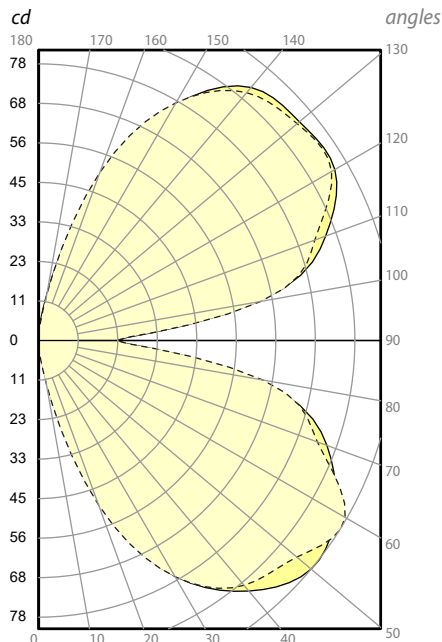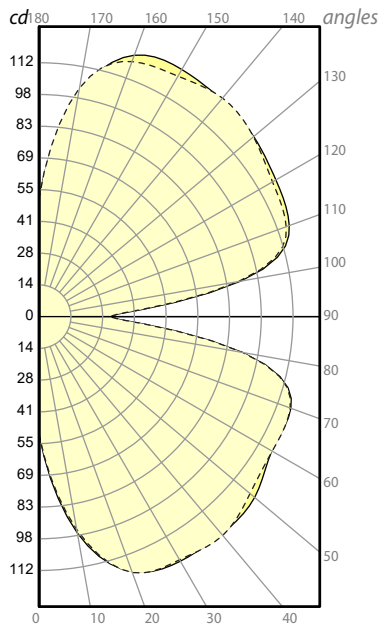

# PHOTOMETRIC REPORT

## 4800-72-LED.TW.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 4571  
 System wattage (W)\*: 61  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 75  
 Photometric type C

## 4800-72-LED.TW.REG-ANTE-WH

CCT (K): 4000  
 Delivered Lumens (lm): 3263  
 System wattage (W)\*: 61  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 53  
 Photometric type C

## 4800-72-LED.40.REG-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 5059  
 System wattage (W)\*: 65  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 78  
 Photometric type C

## 4800-72-LED.40.REG-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 3610  
 System wattage (W)\*: 65  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 55  
 Photometric type C

## 4800-72-LED.40.HO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 9923  
 System wattage (W)\*: 129  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 77  
 Photometric type C

## 4800-72-LED.40.HO-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 7104  
 System wattage (W)\*: 129  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 55  
 Photometric type C

## 4800-72-LED.40.SHO-WHM

CCT (K): 4000  
 Delivered Lumens (lm): 14756  
 System wattage (W)\*: 199.9  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 74  
 Photometric type C

## 4800-72-LED.40.SHO-ANTE

CCT (K): 4000  
 Delivered Lumens (lm): 10560  
 System wattage (W)\*: 199.9  
 Distribution: Direct-Indirect  
 Delivered Efficacy (lm/W): 52  
 Photometric type C

