



KOLOKOL 4452

PROJECT PROJET
SPEC TYPE
NOTES






STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE
STD 60"
1523mm



4452




ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		4452
4452	KOLOKOL	
LIGHT SOURCE SOURCE LUMINEUSE		LED.10
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
LED.10	 10W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
STEM OR CABLE TIGE OU CABLE		
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING MONTAGE		RC
RC	 ROUND CANOPY / PAVILLON ROND FOR DIMMING LED: 1.75" CANOPY (2403G)	
STRUCTURE FINISH FINI STRUCTURE ^(B)		
S C	SATIN CHROME	
BLK*	BLACK	
WH*	WHITE	
*LONGER LEAD TIME		
DIFFUSER FINISH FINI DIFFUSEUR		SA
SA	SATIN ALUMINUM	
ACRYLIC DIFFUSER FINISH FINI DIFFUSEUR ACRYLIQUE		WH
WH	WHITE	
NOTE: LED OPTION HAS A RECESSED ACRYLIC DIFFUSER		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN:	Dramatic, bell shaped aluminum shade makes an architectural statement.
STRUCTURE:	Die-formed steel with a machined diffuser supports.
CERTIFIED:	c-CSA-us
CONCEPTION:	Abat-jour d'aluminium en forme de cloche donnant une prestance architecturale.
STRUCTURE:	Structure d'acier embouti et support à diffuseur usiné.
CERTIFIÉ:	c-CSA-us

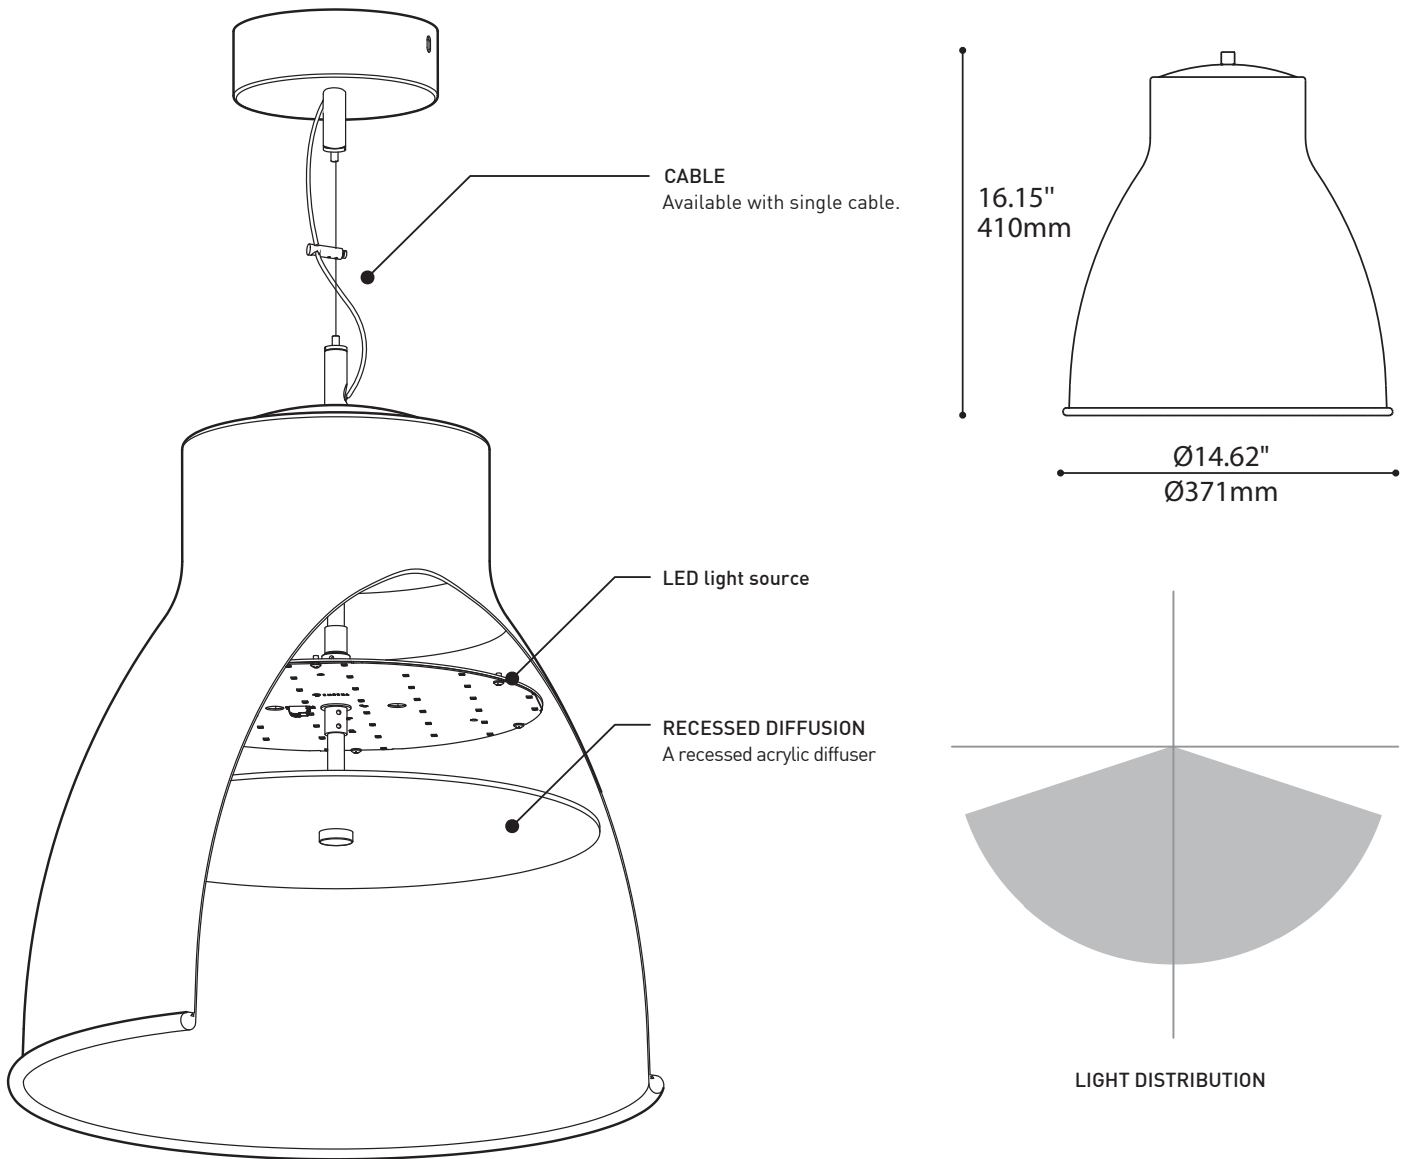

SPECIFICATIONS

LIGHT SOURCE
DELIVERED LUMENS
SYSTEM WATTAGE
DRIVER / BALLAST
DIMMING
VOLTAGE
STRUCTURE
DIFFUSER
SUSPENSION
CERTIFICATION
WARRANTY

LED.XX

44 x Mid power LED on MCPCB
1043 lm
13.3W
16W CC 0-10V
DV 0-10V (120-277V) or DP PHASE DIMMING (120V)
120V or 277V
Die-formed steel with a machined diffuser support
Recessed laser cut 1/8" acrylic for LED version only
Single aircraft cable suspension of stem options available
c-CSA-us , c-UL-us (F.T5.C Circline only)
5 year warranty on LED fixtures, 1 year warranty on fluorescent fixtures

Photometric Report

4452-LED-XX

CCT (K):	4000
Delivered Lumens (lm):	1043
System wattage (W)*:	13.3
Distribution:	Direct
Delivered Efficacy (lm/W):	95
Photometric type	C

Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	14.4 (365.76)
90-270 Axis:	14.4 (365.76)
Height:	15.6 (396.24)

Luminaire spacing criteria

2 luminaires, plane 0:	1.05
2 luminaires, plane 90:	1.04
4 luminaires:	1.18

*System wattage include driver and LED module consumption

