



©



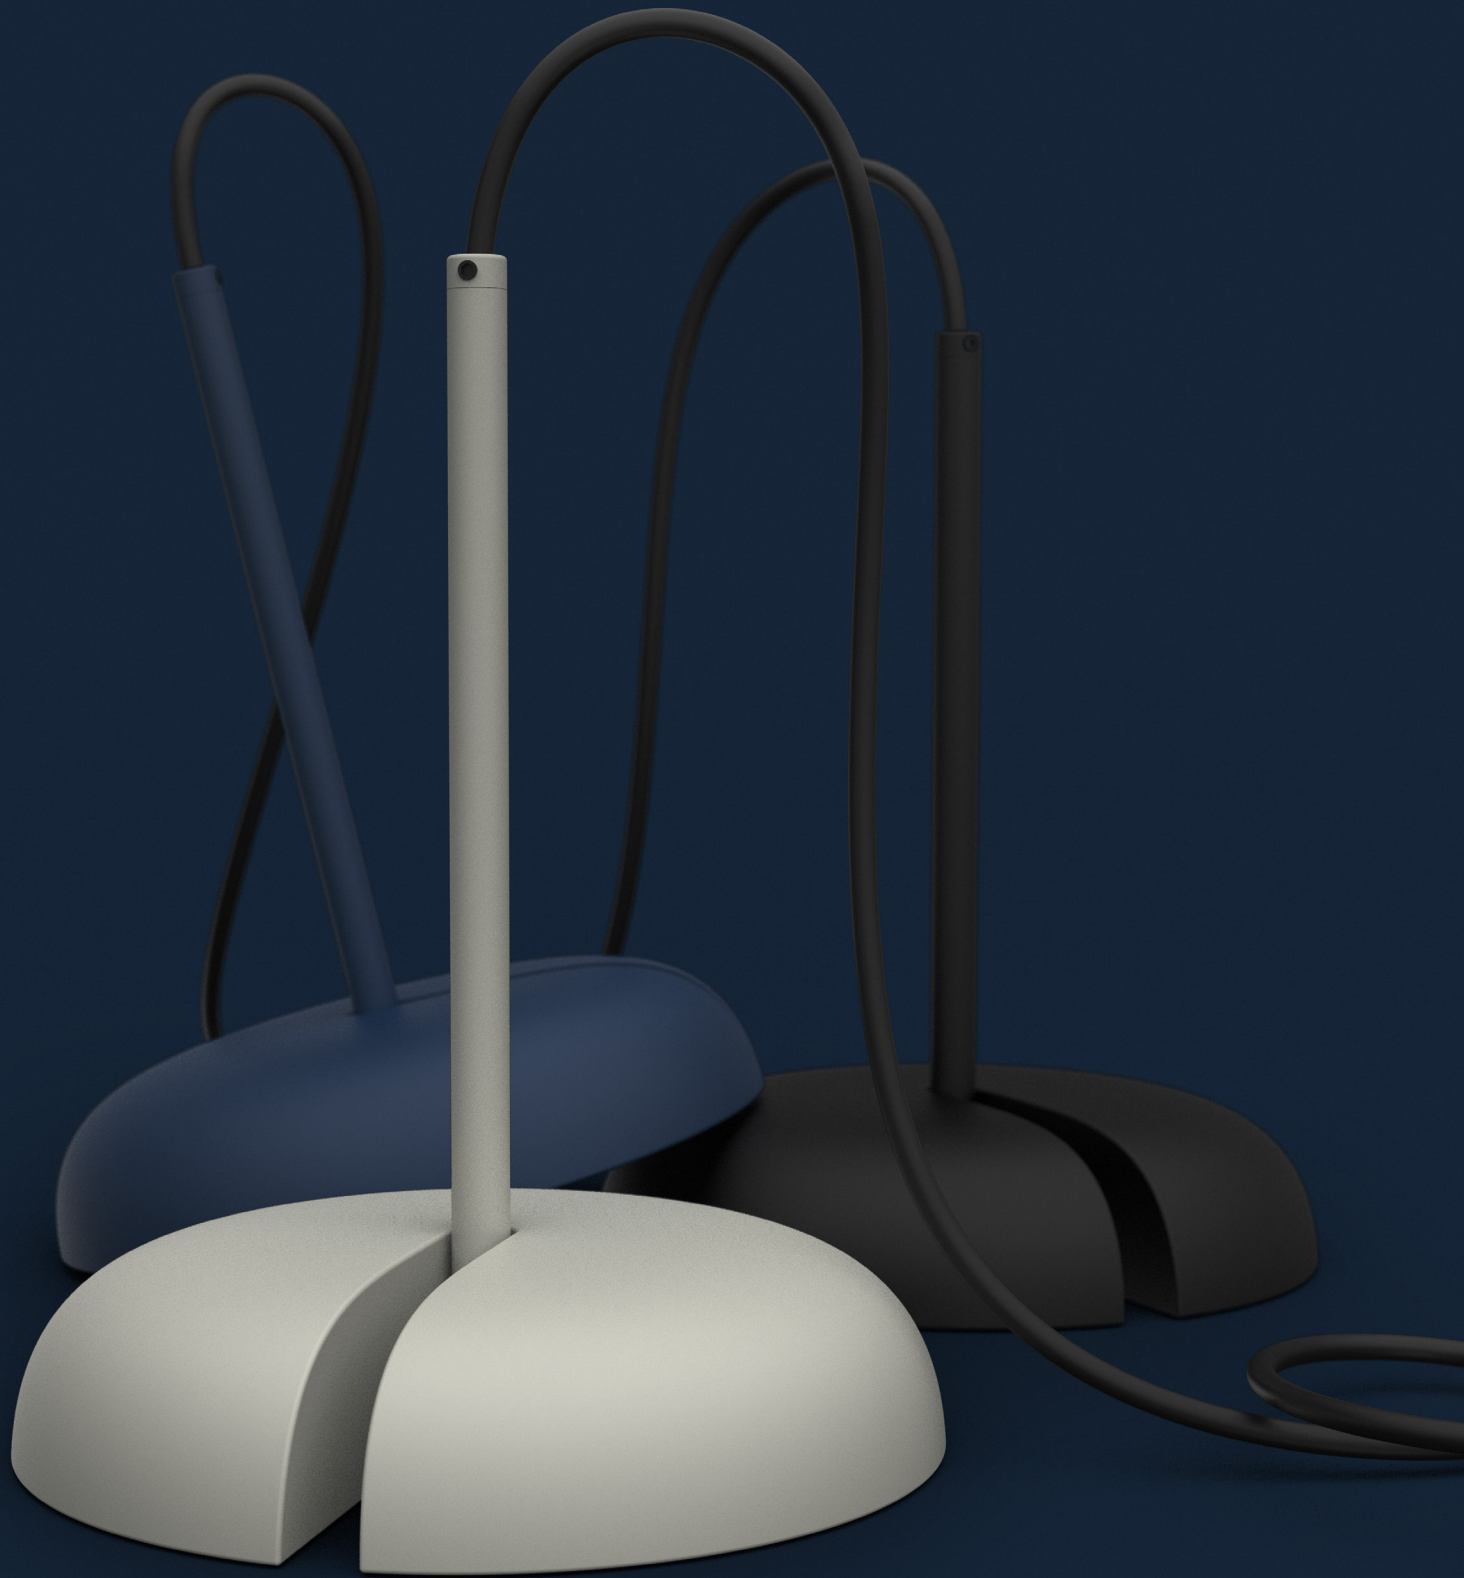

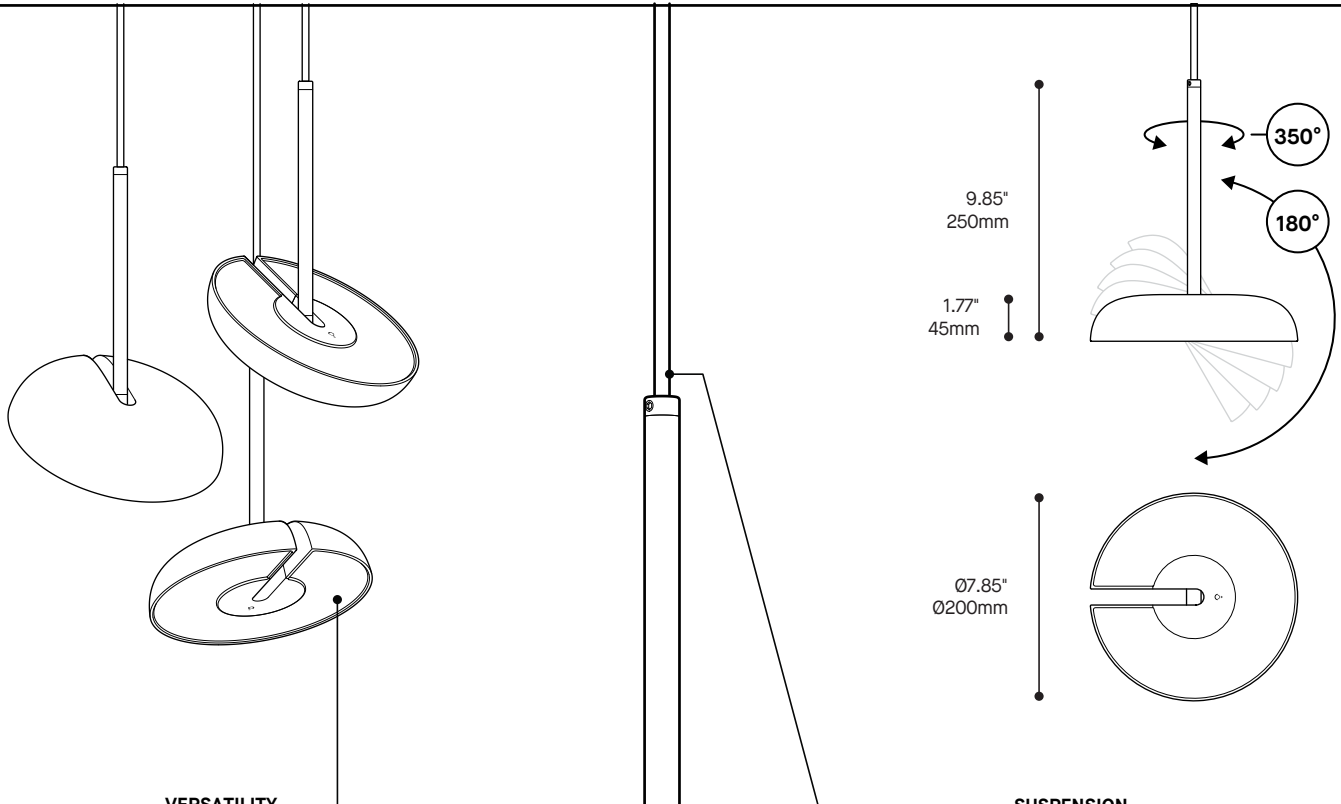

VERSATILITY

Adjustable fixture, light can be aimed in the direction of your choice

EFFICIENT DESIGN

Custom die-casted aluminum head, finished with an architectural grade matte fine textured paint

LUMINOUS DIFFUSION

Optical grade translucent acrylic lens with an internal reflector, for an efficient Lambertian type distribution

SUSPENSION


Single cable pendant, adjustable at will. Available with canopy mounting or track system options

TECHNICAL HINGE

Internal friction hinge, allows a 350° rotation and a 180° pivot orientation of the fixture

HIGH PERFORMANCE LIGHT SOURCE

Custom LED module offered in two light outputs

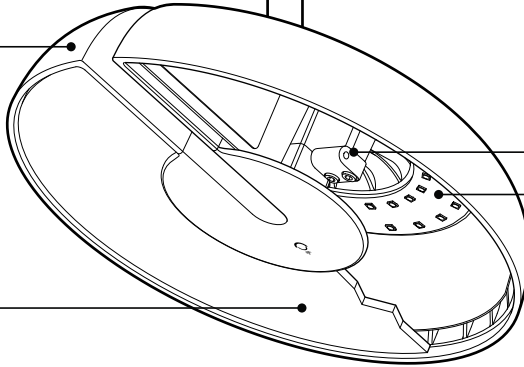


PRODUCT SPECIFICATION	4040 REG	4040 HO
PERFORMANCE		
SYSTEM WATTAGE	14 W	21 W
DELIVERED LUMENS (4000K)	900 LM	1200 LM
EFFICACY	65 LM/W	57 LM/W
OTHER INFORMATIONS		
LUMINAIRE'S WEIGHT	3.15 LBS / 1.43 KG	3.15 LBS / 1.43 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS
ROTATION (HORIZONTAL)	350 °	350 °
PIVOT (VERTICAL)	180 °	180 °

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

LIGHT DISTRIBUTION



4040



Visit our website for warranty terms and conditions.



LILY 4040

PROJECT PROJET
SPEC TYPE
NOTES



FINISH FINI




BLKE WHE LGE PGE NBE

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734E Ø6.13" x 2.00" Ø156 x 51mm*	2471C Ø4.50" x 0.50" Ø114 x 13mm	2473F Ø5.50" x 1.35" Ø140 x 34mm	2474H - WIRED Ø7.75" x 1.30" Ø196.9 x 33mm	2474H - AIR Ø7.75" x 1.30" Ø196.9 x 33mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		4040
4040	LILY	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
	*NOT AVAILABLE FOR TRACK ADAPTOR	
CONTROL OPTION OPTION DE CONTRÔLE		
DV*	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2**	NLIGHT AIR CONTROL GEN 2	
NLIGHT**	NLIGHT WIRED CONTROL	
	DV AND NLIGHT OPTIONS NOT AVAILABLE FOR TRACK ADAPTOR	
	**REQUIRES RC3 CANOPY	
	**EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS	
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE		
	COMPATIBLE WITH RC MOUNTING ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	*3981EA ACCESSORY IS REQUIRED	
CABLE CÂBLE		C
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
	*FOR WHITE HEAD FINISH: WHITE CABLE, FOR OTHER HEAD FINISH: BLACK CABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC1	SCREWLESS CANOPY Ø5.50" X 1.35" (2473F)	
RC2*	SCREWLESS 0.5" CANOPY (2471C)	
RC3	NLIGHT SCREWLESS CANOPY Ø7.75" X 1.30" (2474H)	
	TRACK ADAPTOR / ADAPTATEUR DE RAIL	
TA1	1 CIRCUIT	
	LED DIMMING 120V ADAPTOR (2734E)	
	*3983 ACCESSORY IS NECESSARY FOR 2471C	
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL (A)		
BLK	BLACK	
WH	WHITE	
	(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
CANOPY FINISH FINI PAVILLON (B)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
	(B) FILL IN IF A CANOPY IS SELECTED, OTHERWISE LEAVE EMPTY	
HEAD FINISH FINI TÊTE (C)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
LGE	LIGHT GREY FINE TEXTURE	
PGE	PALE GREEN FINE TEXTURE	
NBE	NAVY BLUE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
	(C) STEM FINISH IS COLOR MATCHING HEAD FINISH	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (REQUIRED FOR SCREWLESS 0.5" CANOPY 2471C OPTION)	



BETTER BOOCH 6
KOMBUCHA
- CITRUS SUNRISE
- GINGER + MINT
- GOLDEN PEAR
- TURMERIC + PEARS
- GINGER BOOST
- GINGER + APPLE + MINT

GRANOLA + MILK 5.50
YAGEL 3 +1 double-
whipped cream
+ chia
OGUAT PARFAIT 4
66 SANDWICH 8/10
REMOVE 2 END OF
KNOX CARAMEL
LUTTO, OR.

TURKEY SANDWICH 8/10 w/lett
QUICHE 6/8

COFFEE	
GUZI ETHIOPIA	5
EL HATO	5
COLUMBIA	5
MIRINGANO CO-OP	5
CONGO	5
WHITE BEN	A.P.

COFFEE
ESPRESSO 3.50
AMERICANO 3.50
CORTADO 3.50
CAPPUCCINO 4.00
LATTE 4.50-4.75
MOCHA 5.00
POUR OVER 4-5
COLD BREW 4.00

PHOTOMETRIC REPORT

LILY

4040 LED REG

CCT (K):	4000
Delivered Lumens (lm):	900
System wattage (W)*:	14.1
Distribution:	Direct / Indirect
Delivered Efficacy (lm/W):	63
Photometric type	C



Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.874 (200.00)
90-270 Axis:	7.874 (200.00)
Height:	0.000 (0.00)

Luminaire spacing criteria

2 luminaires, plane 0:	1.19
2 luminaires, plane 90:	1.19
4 luminaires:	1.31

*System wattage include driver and LED module consumption

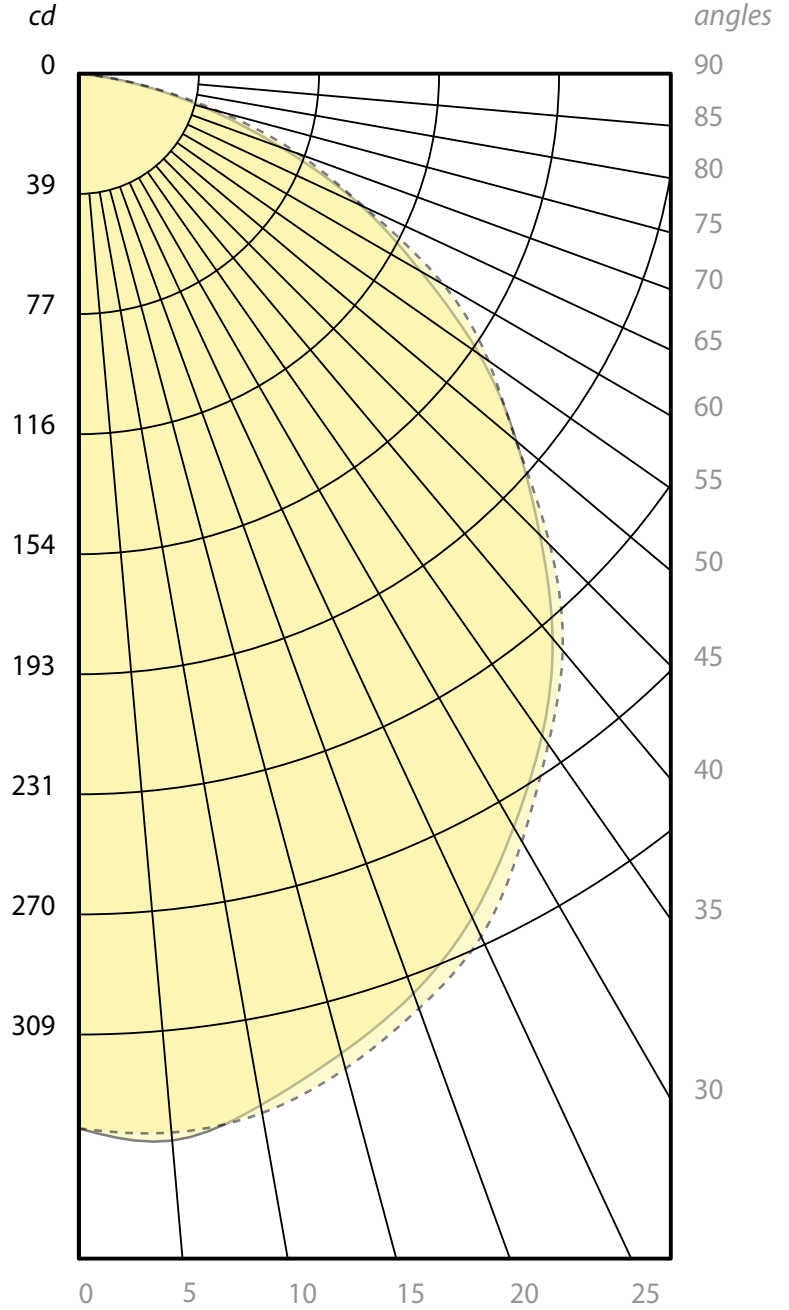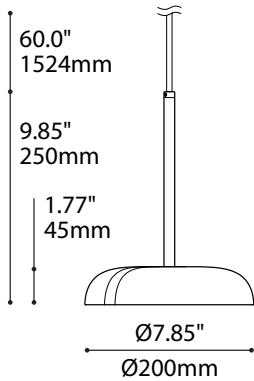

—— 0 - 180
 - - - - 90 - 270

PHOTOMETRIC REPORT

LILY

4040 LED HO

CCT (K):	4000
Delivered Lumens (lm):	1200
System wattage (W)*:	20.7
Distribution:	Direct / Indirect
Delivered Efficacy (lm/W):	59
Photometric type	C



Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.874 (200.00)
90-270 Axis:	7.874 (200.00)
Height:	0.000 (0.00)

Luminaire spacing criteria

2 luminaires, plane 0:	1.21
2 luminaires, plane 90:	1.21
4 luminaires:	1.32

*System wattage include driver and LED module consumption

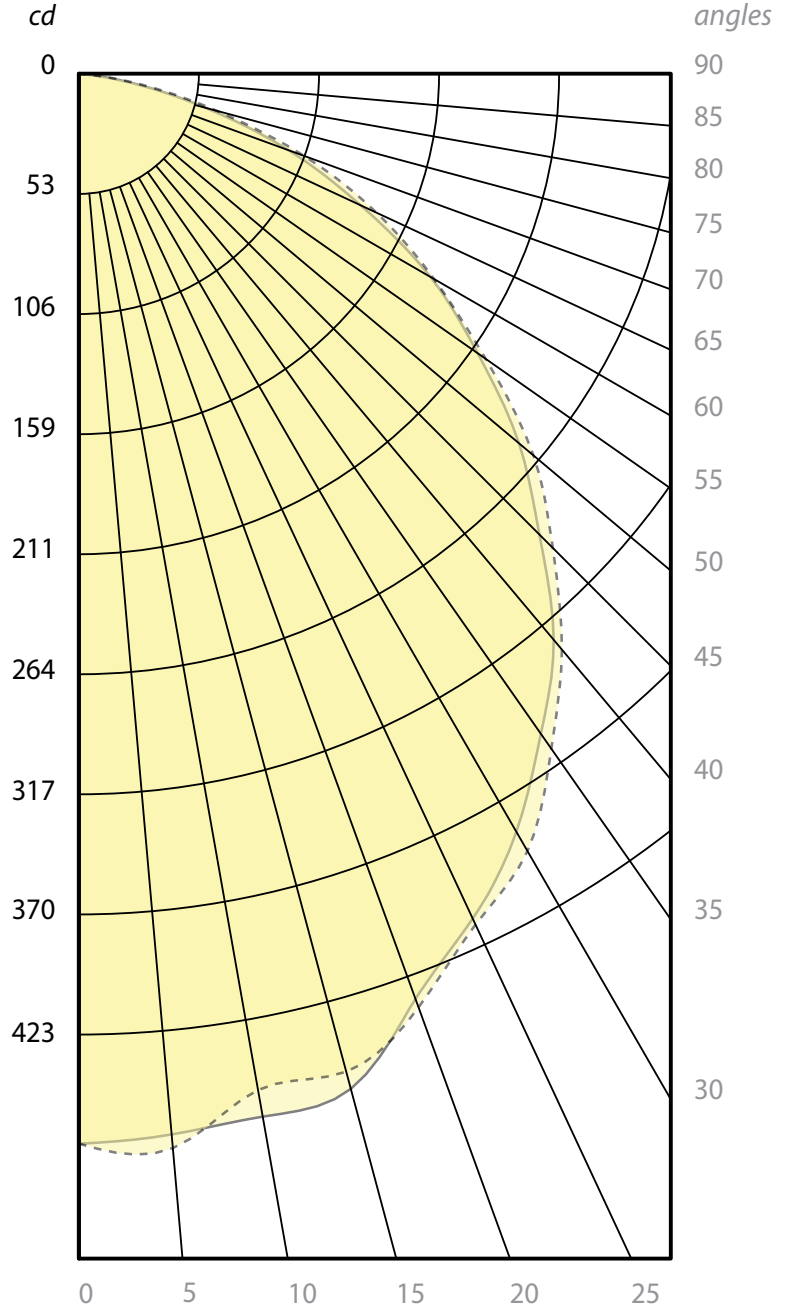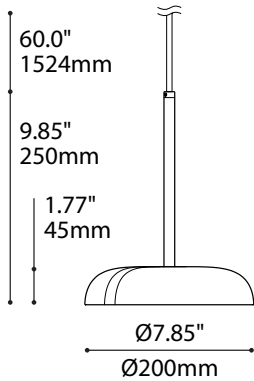

— 0 - 180
 - - - 90 - 270

