




# MOONRISE CLASSIC 3530-23


PROJECT PROJET
SPEC TYPE
NOTES

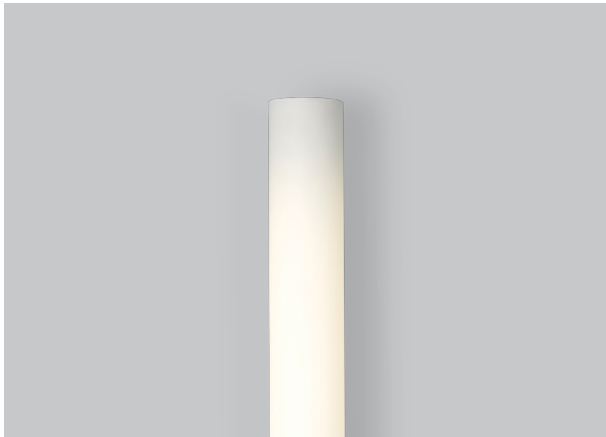

## FAMILY FAMILLE



3531-23

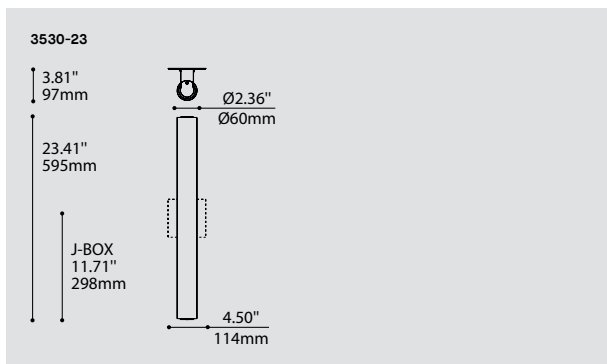

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>		<b>3530-23</b>
3530-23	MOONRISE CLASSIC 23" (ROUND GLASS)	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR<sup>(A)</sup></b>		
30	3000K	
35	3500K	
40	4000K	
<b>VOLTAGE VOLTAGE</b>		
120V	120 VOLT	
277V	277 VOLT	
<b>DIMMING OPTION OPTION DE GRADATION</b>		
AVAILABLE WITH ALL LED LIGHT SOURCES		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
<b>EMERGENCY BATTERY BATTERIE D'URGENCE</b>		
AVAILABLE WITH LED SOURCES 120-227V. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB <sup>(B)</sup>	EMERGENCY BATTERY FOR REMOTE BOX	
<sup>(B)</sup> 3981EA ACCESSORY IS REQUIRED		
<b>HOUSING &amp; END CAPS FINISH FINI BOITIER &amp; EMBOUTS*</b>		
END CAPS ALWAYS THE SAME FINISH AS THE HOUSING.		
CHR	CHROME	
S C	SATIN CHROME	
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		<b>WH</b>
WH	WHITE	
<b>ACCESSORY ACCESSOIRE</b>		
3980	MINI JUNCTION BOX	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	Modern classic round profile wall sconce or surface mounted fixture. ADA compliant.
<b>LIGHT SOURCE:</b>	Dimming LED.
<b>HOUSING &amp; END CAPS:</b>	Machined steel end caps & die-stamped steel structure with plated finish.
<b>DIFFUSER:</b>	Hand blown white triplex glass.
<b>CERTIFIED:</b>	c-CSA-us
<b>CONCEPTION:</b>	Applique ou plafonnier cylindrique classique et contemporain. Conforme à la norme ADA.
<b>SOURCE LUMINEUSE:</b>	DEL à gradation
<b>BOITIER &amp; EMBOUTS:</b>	Embout d'acier usiné et acier embouti plaqués.
<b>ABAT-JOUR:</b>	Verre triplex blanc soufflé à la main.
<b>CERTIFIÉ:</b>	c-CSA-us


# MOONRISE CLASSIC 3530-23

**QUICKSHIP**


PROJECT PROJET

SPEC TYPE

NOTES

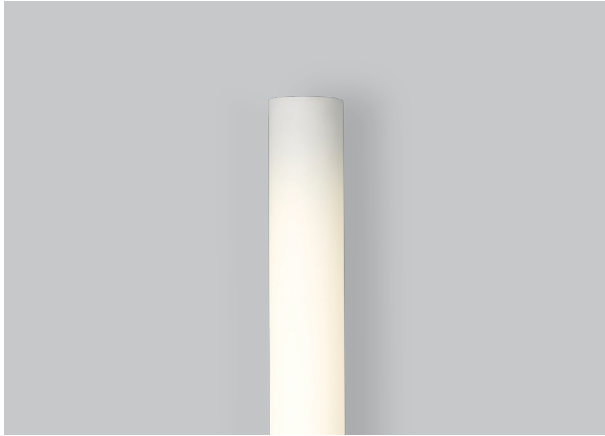

3530-23



## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### QUICKSHIP

**QS5** QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS  
**QS10** QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

### MODEL MODÈLE

**3530-23** MOONRISE CLASSIC 23" (ROUND GLASS)

**3530-23**

### LIGHT SOURCE SOURCE LUMINEUSE

**LED** REGULAR OUTPUT  
**LED.HO** HIGH OUTPUT

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR (A)

**30** 3000K  
**35** 3500K  
**40** 4000K

### VOLTAGE VOLTAGE

**120V** 120 VOLT  
**277V** 277 VOLT

### DIMMING OPTION OPTION DE GRADATION

**DV** 0-10V DIMMING (120V-277V)

### HOUSING & END CAPS FINISH FINI BOITIER & EMBOUTS\*

END CAPS ALWAYS THE SAME FINISH AS THE HOUSING.

**CHR** CHROME  
**S C** SATIN CHROME

### DIFFUSER FINISH FINI DIFFUSEUR

**WH** WHITE

**WH**

### ACCESSORY ACCESSOIRE

**3980** MINI JUNCTION BOX

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




**DESIGN:** Modern classic round profile wall sconce or surface mounted fixture. ADA compliant.  
**HOUSING & END CAPS:** Machined steel end caps & die-stamped steel structure with plated finish.  
**DIFFUSER:** Hand blown white triplex glass.  
**CERTIFIED:** c-CSA-us

**CONCEPTION:** Applique ou plafonnier cylindrique classique et contemporain. Conforme à la norme ADA.  
**BOITIER & EMBOUTS:** Embout d'acier usiné et acier embouti plaqués.  
**ABAT-JOUR:** Verre triplex blanc soufflé à la main.  
**CERTIFIÉ:** c-CSA-us

# TECHNICAL DATA - MOONRISE, MOONSET - CLASSIC 353X - 23

3530-23 MOONRISE    3531-23 MOONSET




**DIFFUSER**  
Hand blown white triplex glass

**ENDCAPS**  
Machined steel endcaps mechanically attached to structure with one-way security screw

**EASY MOUNTING**  
Die-formed steel structure provides an easy access to component wiring

**LED LIGHT ENGINE**  
ANSI binned white LED Nichia w/ on-board thermal management

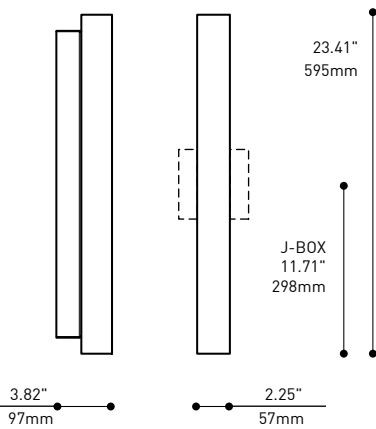

**PRODUCT SPECIFICATION**    3530-23 REG    3530-23 HO    3531-23 REG    3531-23 HO

**PERFORMANCE**

<b>SYSTEM WATTAGE</b>	10 W	14.5 W	10 W	14.5 W
<b>DELIVERED LUMENS (4000K)</b>	899 LM	1292 LM	889 LM	1278 LM
<b>EFFICACY</b>	89.9 LM/W	89.1 LM/W	89.9 LM/W	88.14 LM/W


**OTHER INFORMATIONS**

<b>LUMINAIRE'S WEIGHT</b>	6.13 LBS / 2.78 KG	6.13 LBS / 2.78 KG	6.13 LBS / 2.78 KG	6.13 LBS / 2.78 KG
<b>L70 (MAINTENANCE DE LA LUMIÈRE)</b>	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

**LIGHT DISTRIBUTION**

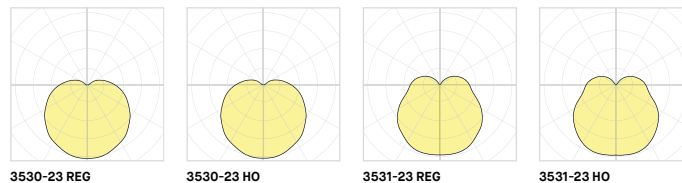

Visit our website for warranty terms and conditions.



