

## Outdesign. Outperform.

A cutting-edge lens for seamlessly uniform light. A cohesive design idea flawlessly executed. Outline takes the fusion of functionality and aesthetics further than ever before, opening whole new windows of possibility.



reddot winner 2021



EUREKA


# Crafting ambiance

Carry Outline's elegant aesthetics and luminous halos anywhere with recessed, surface and suspended mounting options.




# A patented innovative design

Advanced halo shaped optics create a uniform and effective light beam enabling quality illumination with a smooth cut-off. The glowing ring adds visual interest to a space.

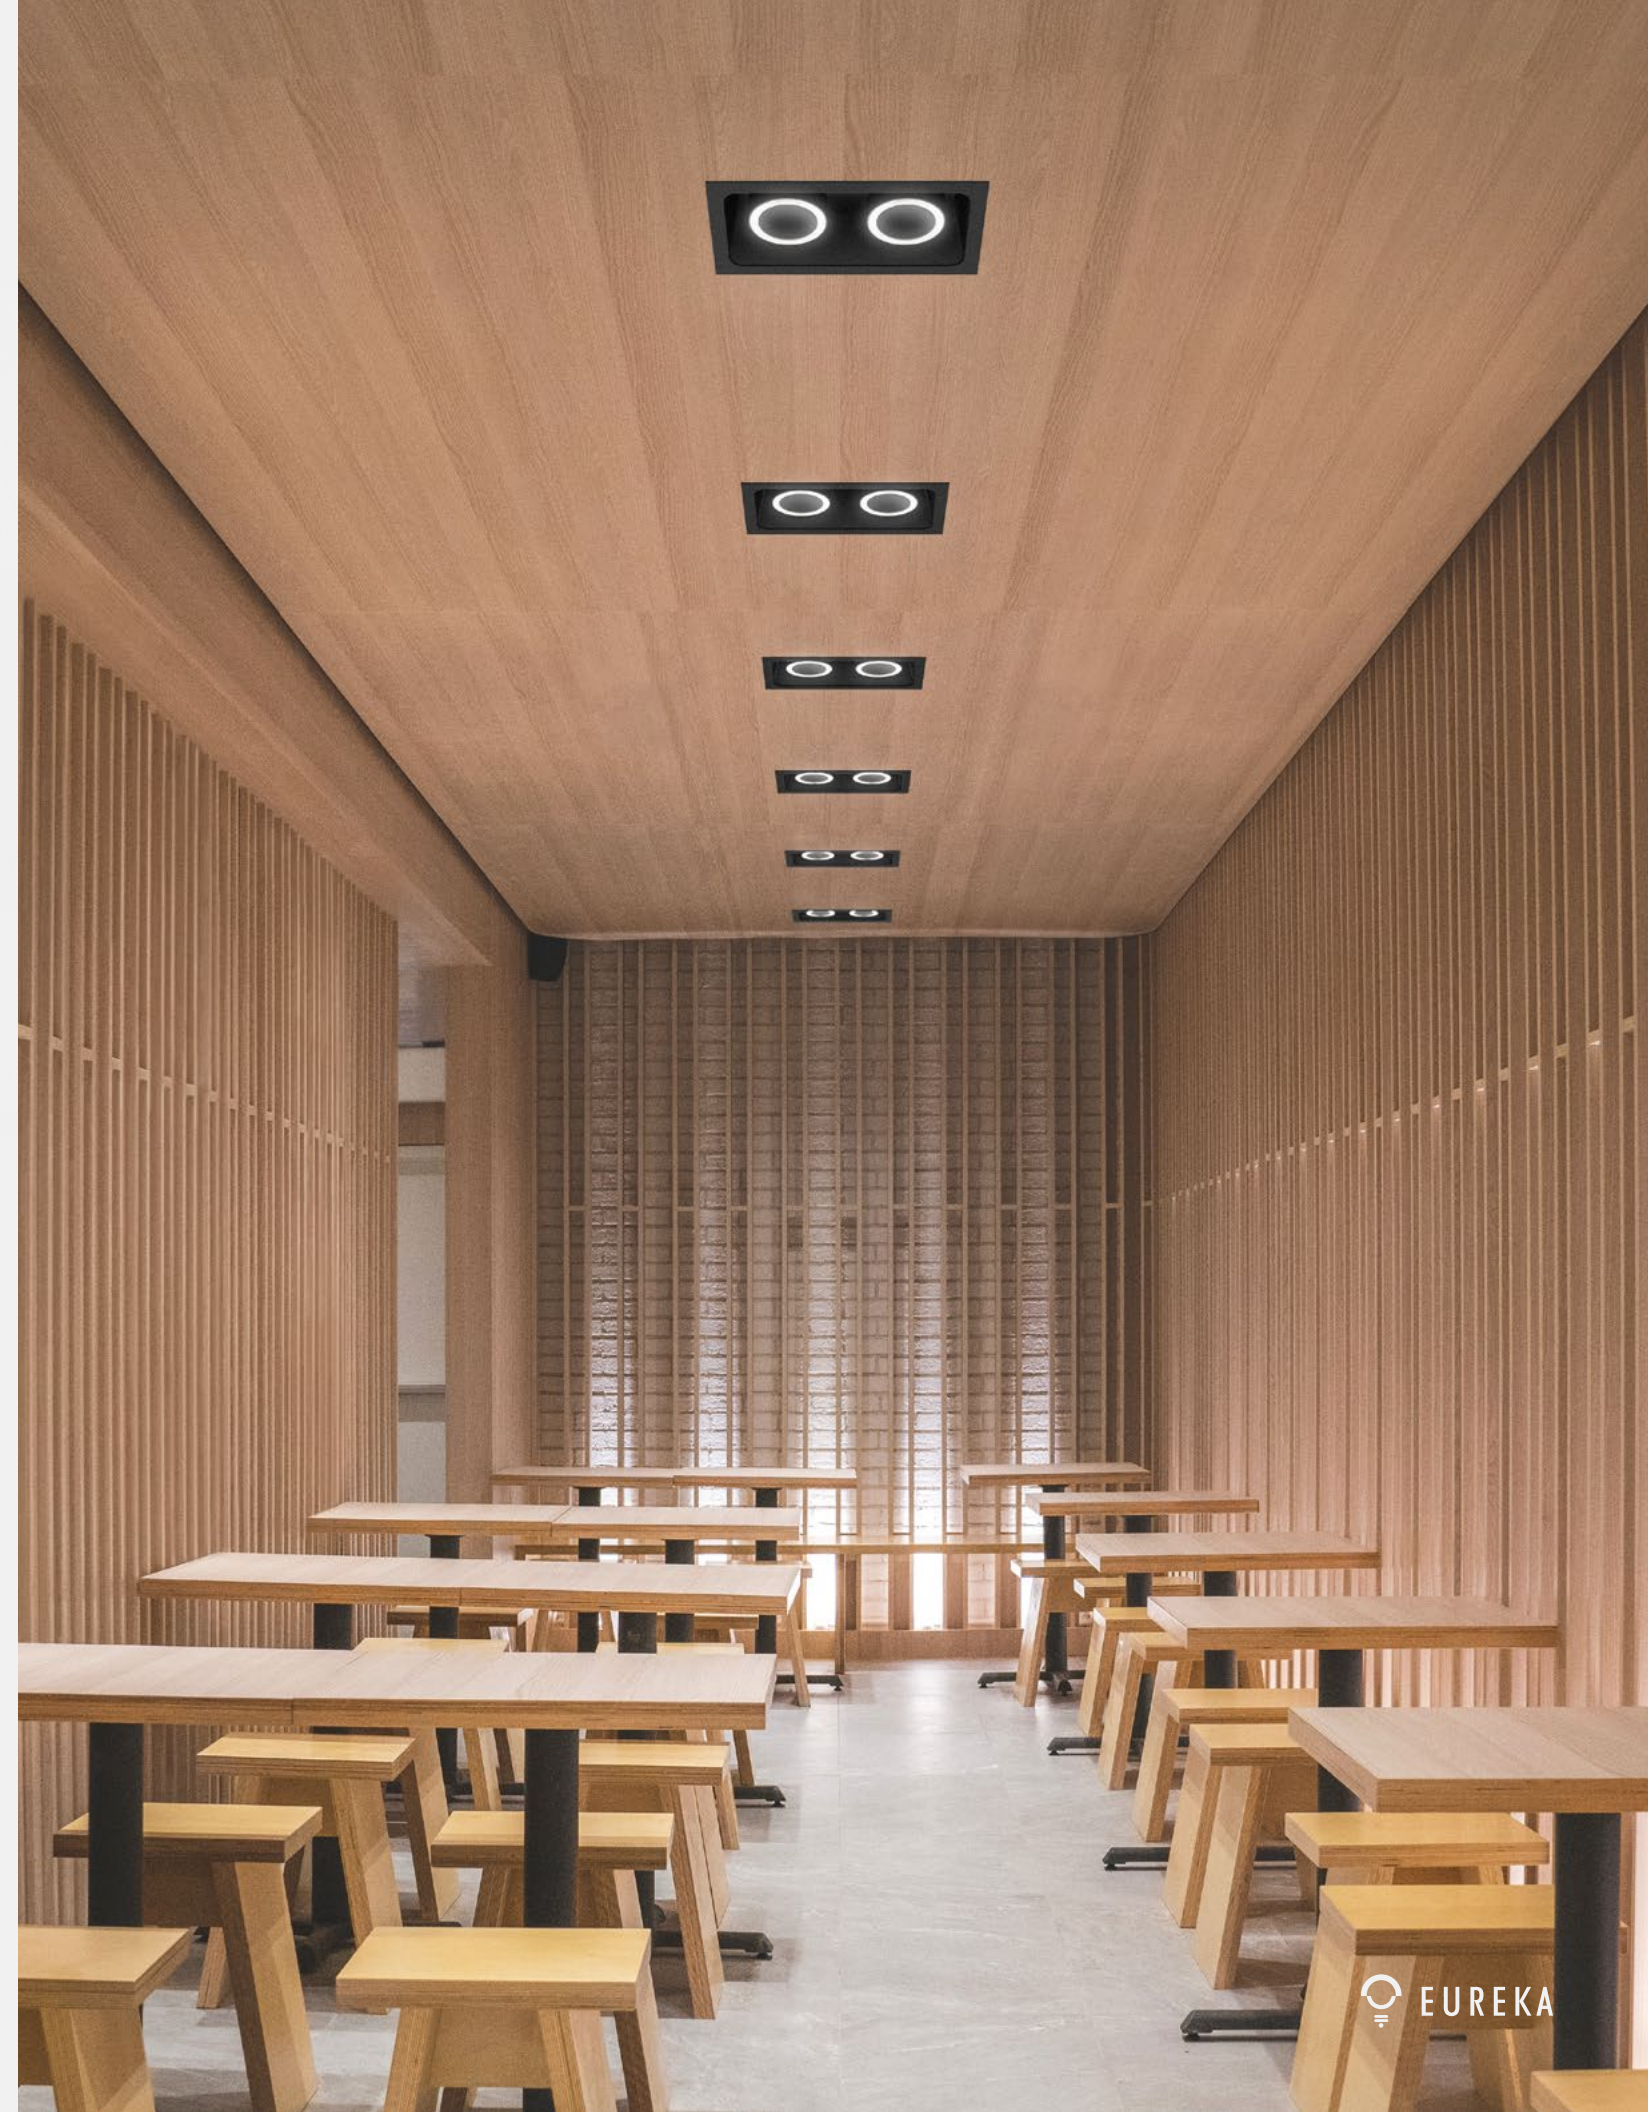

# TECHNICAL DATA - RECESSED 12900

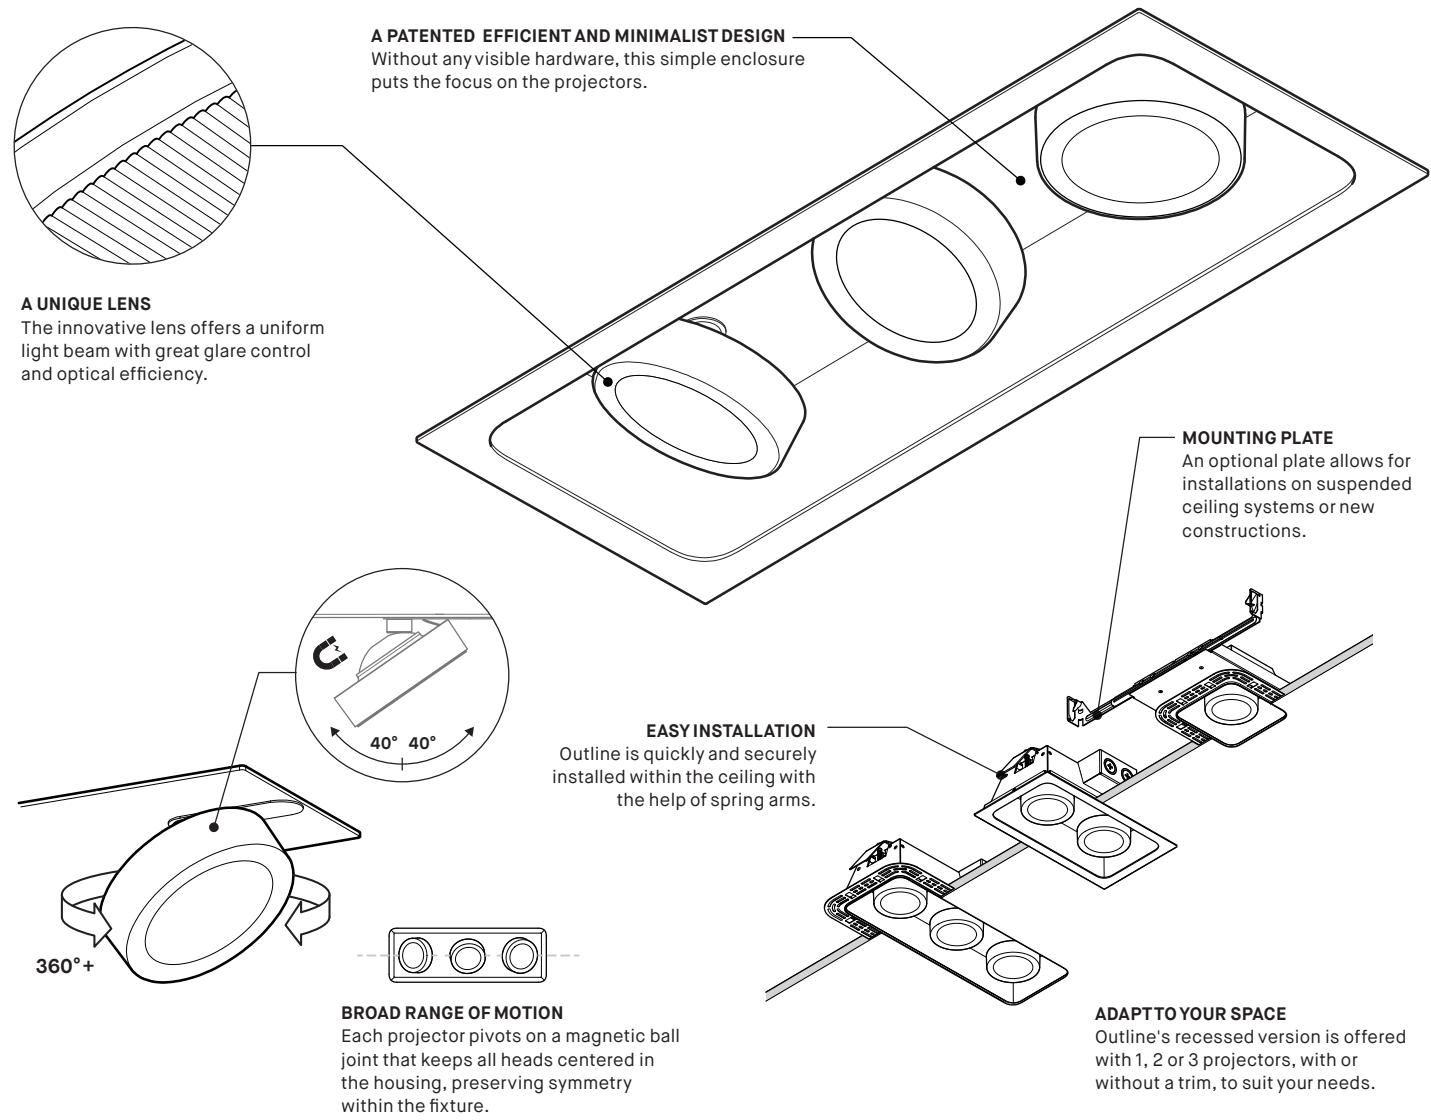


PRODUCT SPECIFICATION	12900-1X1 REG - HO	12900-2X1 REG - HO	12900-3X1 REG - HO
<b>PERFORMANCE</b>			
SYSTEM WATTAGE	10.1 W - 15.2 W	18.6 W - 29.6 W	27.5 W - 44.6 W
DELIVERED LUMENS (4000K - WHE)	764 LM - 1245 LM	1528 LM - 2486 LM	2292 LM - 3729 LM
EFFICACY	75 LM/W - 82 LM/W	82 LM/W - 84 LM/W	83 LM/W - 84 LM/W
<b>OTHER INFORMATIONS</b>			
LUMINAIRE'S WEIGHT (UP TO)	3.9 LBS / 1.8 KG	5.5 LBS / 2.5 KG	8.3 LBS / 3.8 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

**EFFICACY MULTIPLIERS**


CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.94
80+	3000K	0.94
80+	2700K	0.94
90+	4000K	0.87
90+	3500K	0.81
90+	3000K	0.81
90+	2700K	0.74

**LIGHT DISTRIBUTION**







# TECHNICAL DATA - SURFACE 46900



**A UNIQUE LENS**  
The innovative lens offers a uniform light beam with great glare control and optical efficiency.

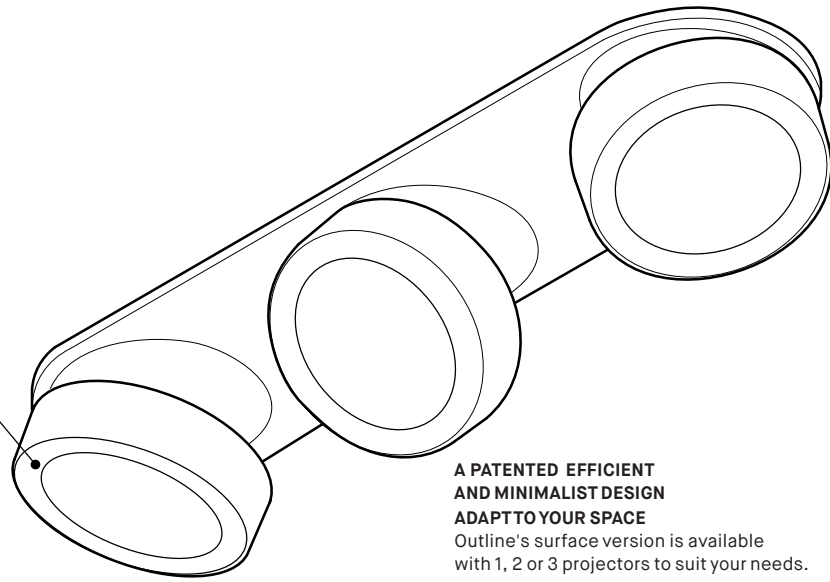


**A PATENTED EFFICIENT AND MINIMALIST DESIGN ADAPT TO YOUR SPACE**  
Outline's surface version is available with 1, 2 or 3 projectors to suit your needs.

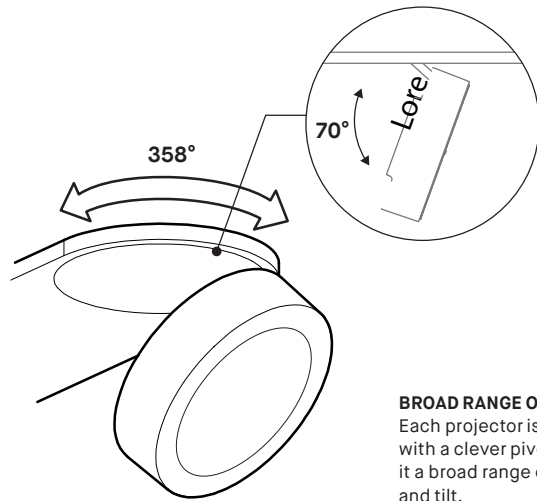


**BROAD RANGE OF MOTION**  
Each projector is equipped with a clever pivot that gives it a broad range of rotation and tilt.


1X1



2X1



3X1




**EASY INSTALLATION**  
Outline is quickly and securely installed on the ceiling with the help of spring arms.

PRODUCT SPECIFICATION	46900-1X1 REG - HO	46900-2X1 REG - HO	46900-3X1 REG - HO
<b>PERFORMANCE</b>			
SYSTEM WATTAGE	10.1 W - 15.2 W	18.6 W - 29.6 W	27.5 W - 44.6 W
DELIVERED LUMENS (4000K - WHE)	764 LM - 1245 LM	1528 LM - 2486 LM	2292 LM - 3729 LM
EFFICACY	75 LM/W - 82 LM/W	82 LM/W - 84 LM/W	83 LM/W - 84 LM/W
<b>OTHER INFORMATIONS</b>			
LUMINAIRE'S WEIGHT (UP TO)	1.1 LBS / 0.5 KG	2.9 LBS / 1.3 KG	4.4 LBS / 2.0 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.94
80+	3000K	0.94
80+	2700K	0.94
90+	4000K	0.87
90+	3500K	0.81
90+	3000K	0.81
90+	2700K	0.74

**LIGHT DISTRIBUTION**




PROJECTOR



Visit our website for warranty terms and conditions.





# TECHNICAL DATA - SUSPENDED AIMABLE 74900

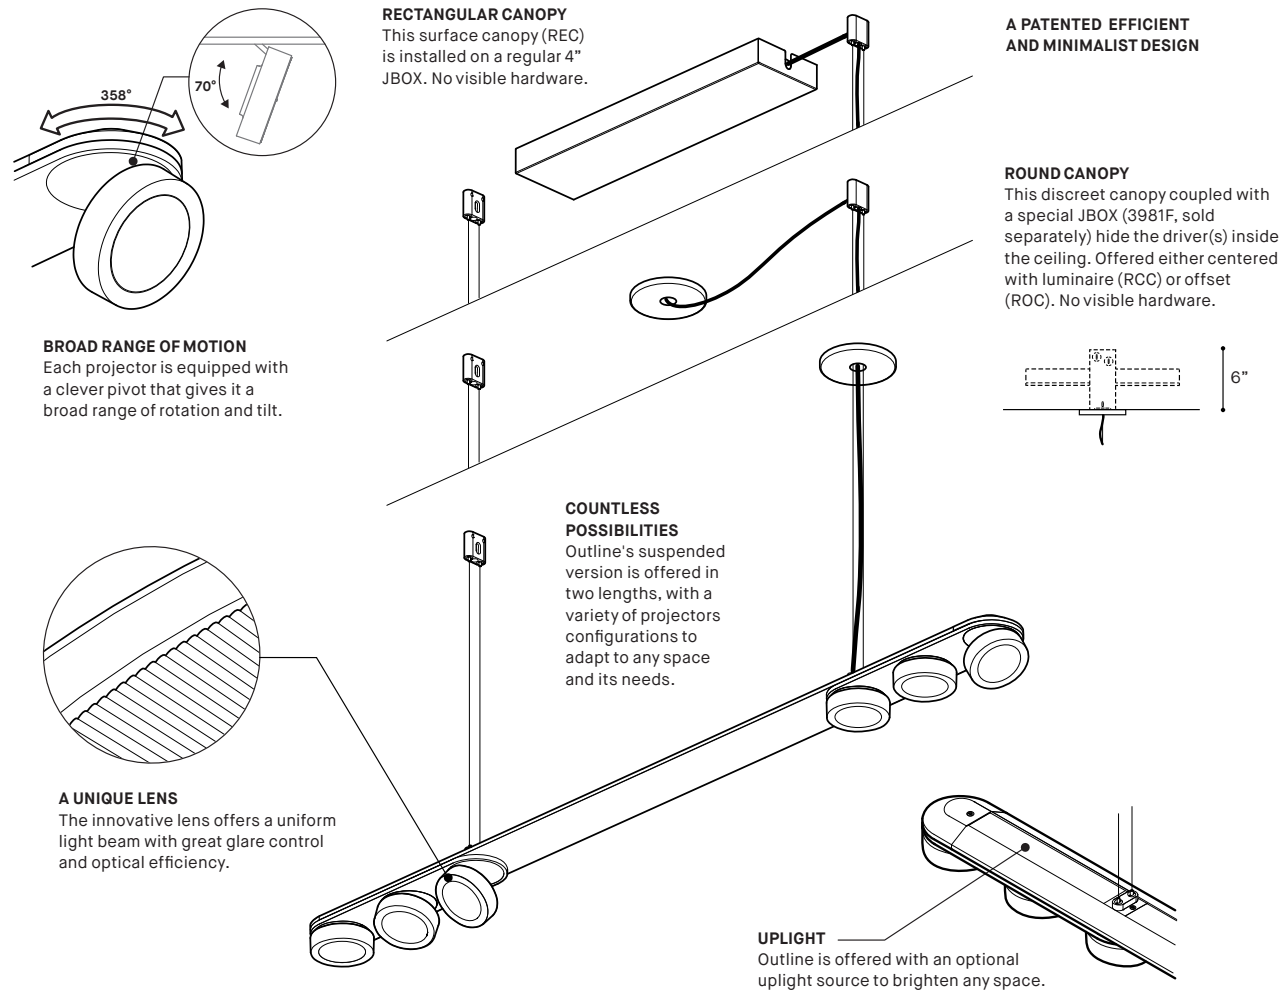

PRODUCT SPECIFICATION	PROJECTOR (EACH) LOW - REG	UPLIGHT 54" LOW - REG - HO	UPLIGHT 78" LOW - REG - HO
<b>PERFORMANCE</b>			
SYSTEM WATTAGE	5 W - 8.7 W	15.7 W - 32.3 W - 50.1 W	22.9 W - 47.5 W - 74.5 W
DELIVERED LUMENS (4000K - WHE)	405 LM - 733 LM	1960 LM - 2824 LM - 5580 LM	3005 LM - 5862 LM - 8552 LM
EFFICACY	81 LM/W - 84 LM/W	125 LM/W - 118 LM/W - 111 LM/W	131 LM/W - 123 LM/W - 115 LM/W
<b>OTHER INFORMATIONS</b>			
LUMINAIRE'S WEIGHT (UP TO)		12.1 LBS / 5.5 KG	15.2 LBS / 6.9 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS


**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR PROJ.	FACTOR UPLIGHT
80+	4000K	1.00	1.00
80+	3500K	0.94	0.98
80+	3000K	0.94	0.94
80+	2700K	0.94	0.91
90+	4000K	0.87	0.88
90+	3500K	0.81	0.85
90+	3000K	0.81	0.81
90+	2700K	0.74	0.77

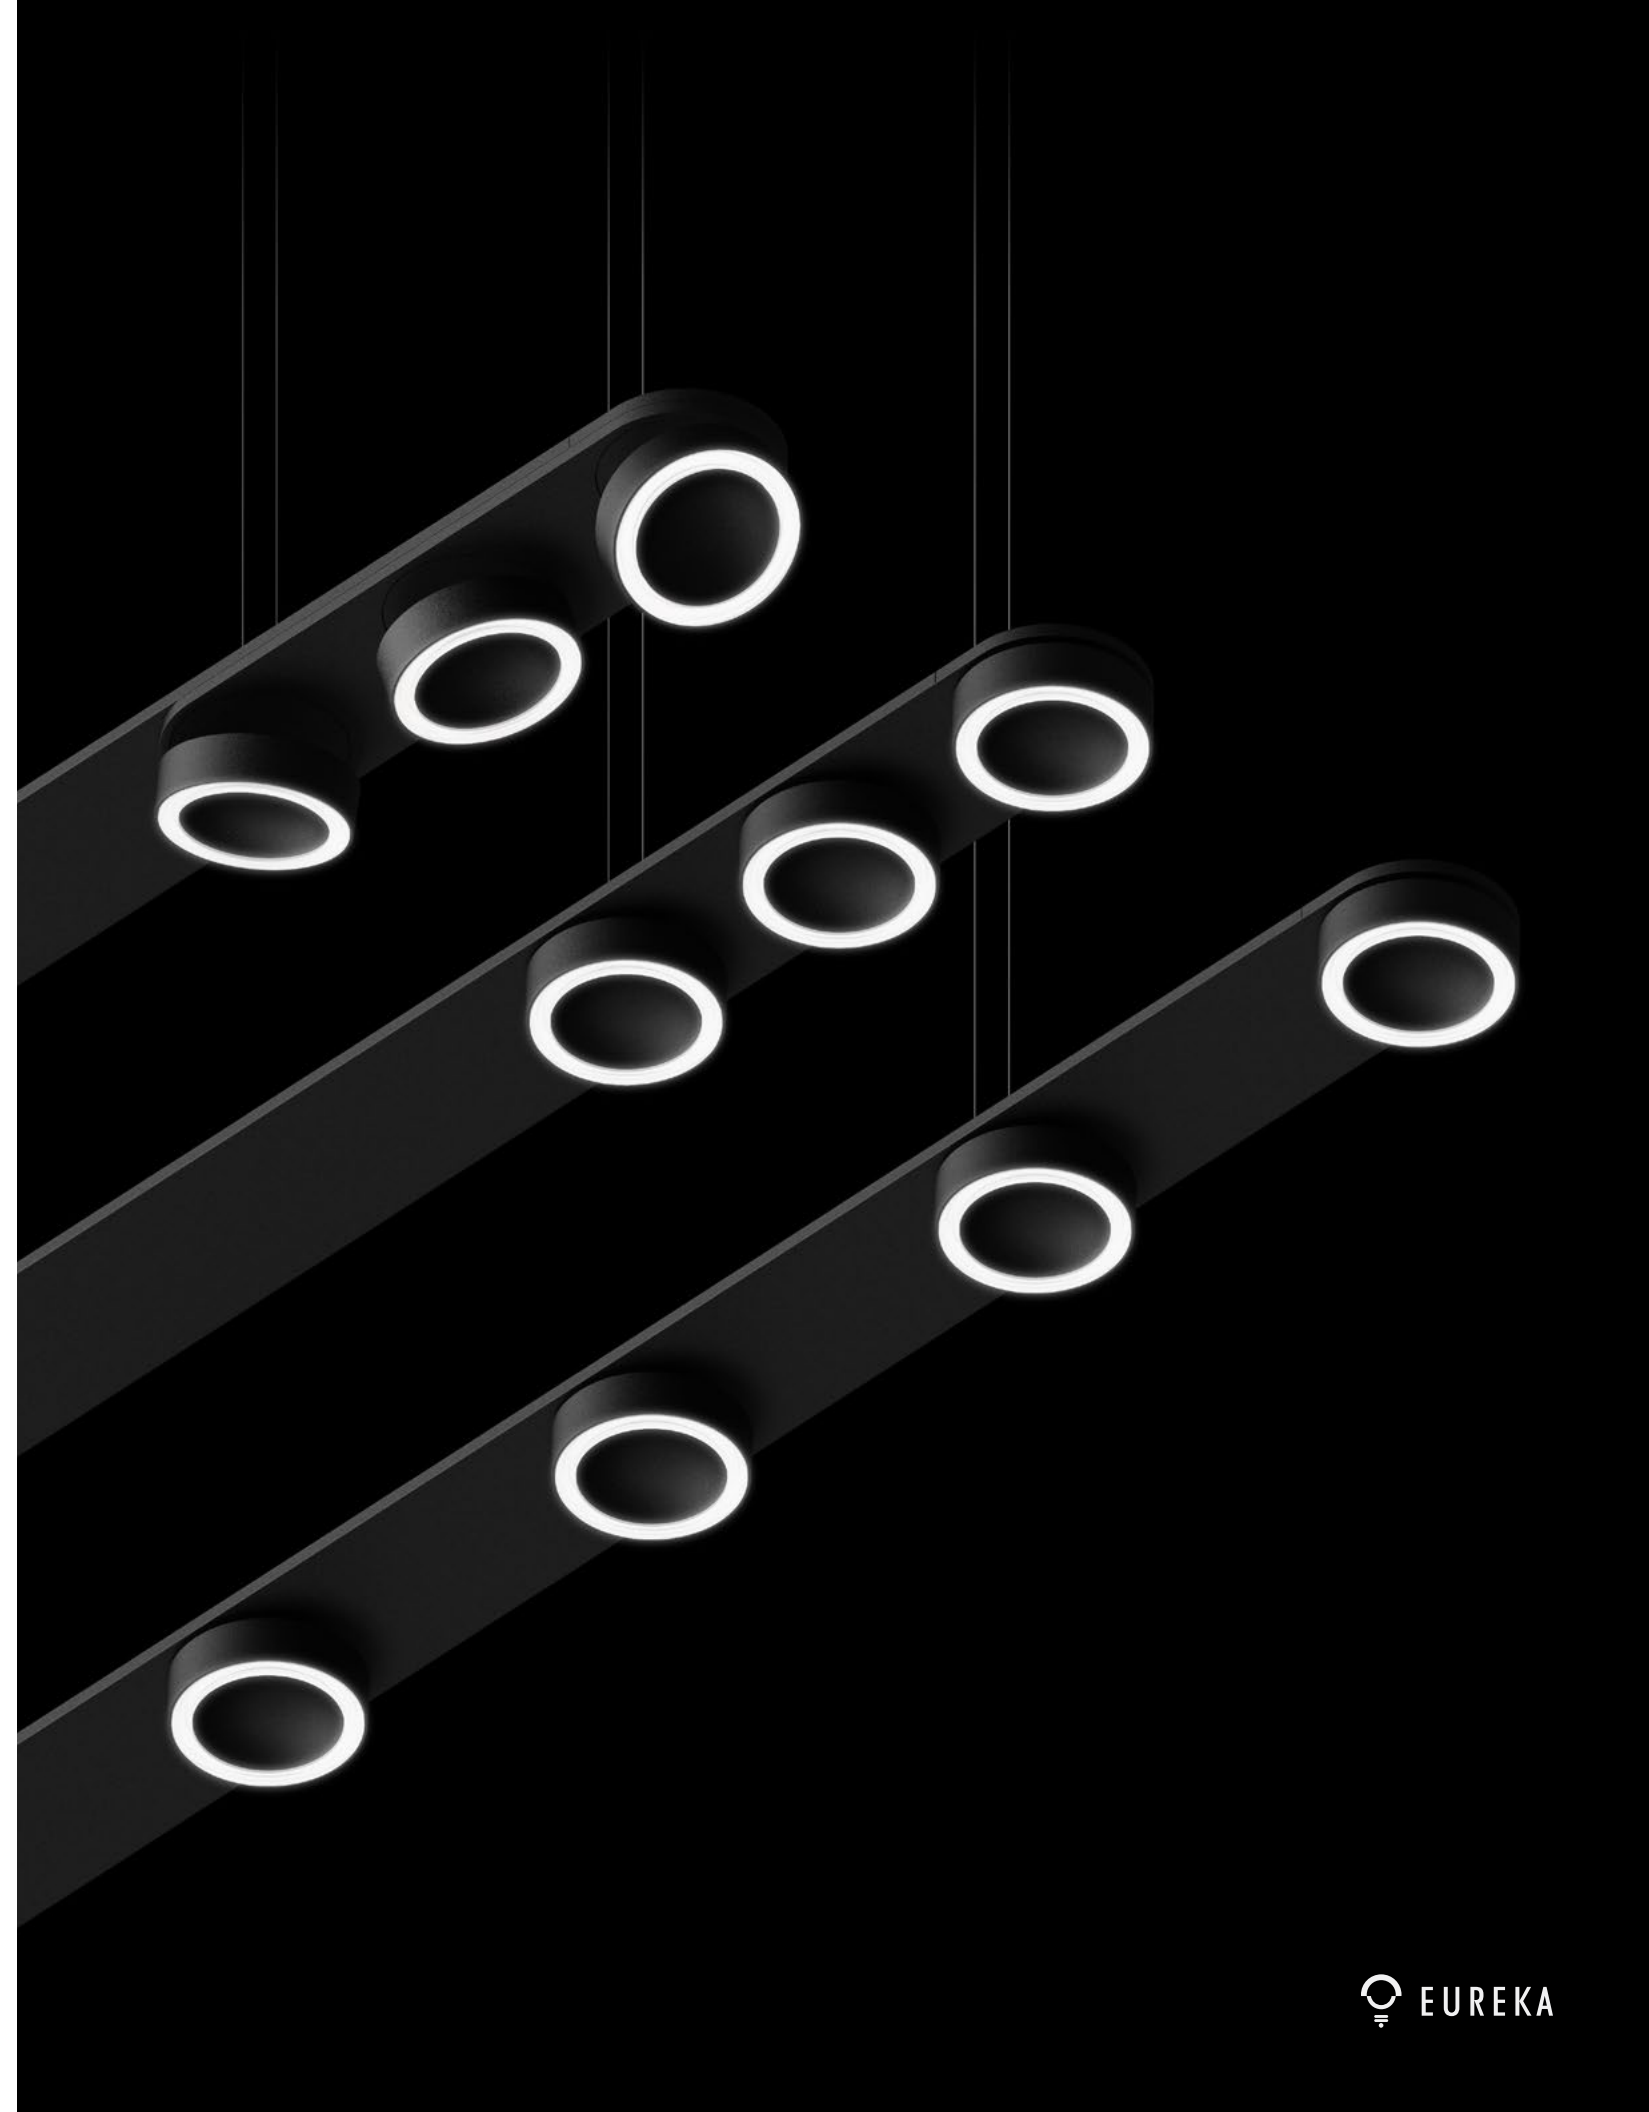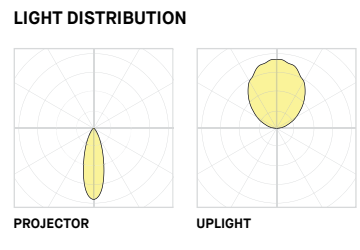




# TECHNICAL DATA - SUSPENDED FIXED 74901




**FIXED PROJECTORS**  
Projectors are fixed for downlight applications. Heads are evenly distributed along luminaire or clustered together.

**RECTANGULAR CANOPY**  
This surface canopy (REC) is installed on a regular 4" JBOX. No visible hardware.

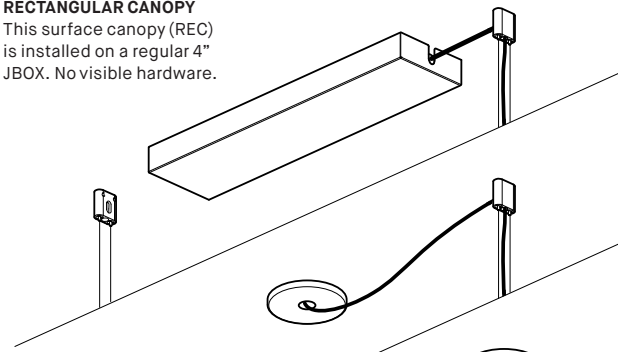


**A PATENTED EFFICIENT AND MINIMALIST DESIGN**


**ROUND CANOPY**  
This discreet canopy coupled with a special JBOX (3981F, sold separately) hide the driver(s) inside the ceiling. Offered either centered with luminaire (RCC) or offset (ROC). No visible hardware.



**COUNTLESS POSSIBILITIES**  
Outline's suspended version is offered in two lengths, with a variety of projector configurations to adapt to any space and its needs.




**A UNIQUE LENS**  
The innovative lens offers a uniform light beam with great glare control and optical efficiency.

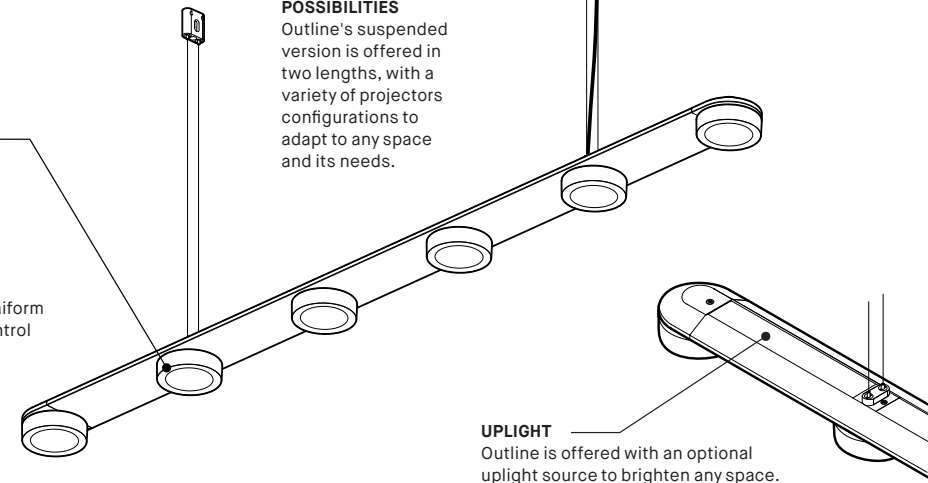

**UPLIGHT**  
Outline is offered with an optional uplight source to brighten any space.

PRODUCT SPECIFICATION	PROJECTOR (EACH) LOW - REG	UPLIGHT 54" LOW - REG - HO	UPLIGHT 78" LOW - REG - HO
<b>PERFORMANCE</b>			
SYSTEM WATTAGE	5 W - 8.7 W	15.7 W - 32.3 W - 50.1 W	22.9 W - 47.5 W - 74.5 W
DELIVERED LUMENS (4000K - WHE)	405 LM - 733 LM	1960 LM - 2824 LM - 5580 LM	3005 LM - 5862 LM - 8552 LM
EFFICACY	81 LM/W - 84 LM/W	125 LM/W - 118 LM/W - 111 LM/W	131 LM/W - 123 LM/W - 115 LM/W
<b>OTHER INFORMATIONS</b>			
LUMINAIRE'S WEIGHT (UP TO)		12.1 LBS / 5.5 KG	15.2 LBS / 6.9 KG
L70 (LUMEN MAINTENANCE)	60 000 HRS	60 000 HRS	60 000 HRS

EFFICACY MULTIPLIERS			
CRI	CCT	FACTOR PROJ.	FACTOR UPLIGHT
80+	4000K	1.00	1.00
80+	3500K	0.94	0.98
80+	3000K	0.94	0.94
80+	2700K	0.94	0.91
90+	4000K	0.87	0.88
90+	3500K	0.81	0.85
90+	3000K	0.81	0.81
90+	2700K	0.74	0.77

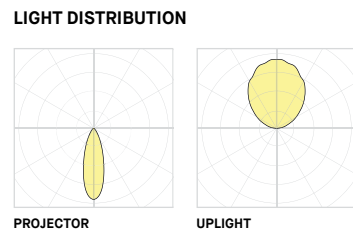



Visit our website for warranty terms and conditions.



Flowspace, Georgia, USA

# OUTLINE RECESSED 12900


PROJECT PROJÉT
SPEC TYPE
NOTES

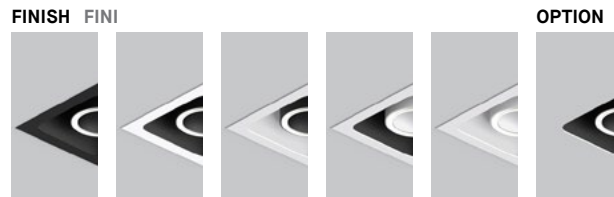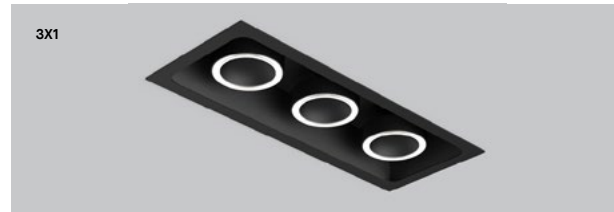

BLKE-BLKE -BLKE WHE-BLKE -BLKE WHE-BLKE -WHE WHE-WHE -BLKE WHE-WHE -WHE NT



SURFACE (46900) SUSPENDED AIMABLE (74900) SUSPENDED FIXED (74901)

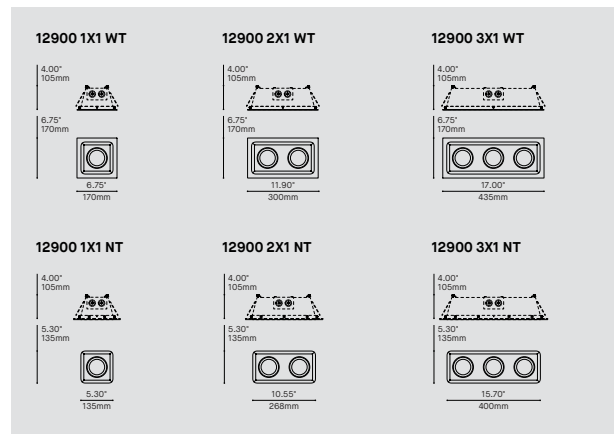

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE		
12900-1X1	OUTLINE RECESSED 1X1	
12900-2X1	OUTLINE RECESSED 2X1	
12900-3X1	OUTLINE RECESSED 3X1	
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE		
LED	REGULAR OUTPUT (IC RATED)	
LED.HO	HIGH OUTPUT (NON-IC RATED)	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI)</b> INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>VOLTAGE</b> VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
<b>DIMMING OPTION</b> OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE	
<b>EMERGENCY BATTERY</b> BATTERIE D'URGENCE		
	INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED	
<b>BEAM ANGLE</b> ANGLE DE FAISCEAU		ME
ME	MEDIUM (30°)	
<b>MOUNTING</b> MONTAGE		
WT	WITH TRIM	
NT	TRIMLESS (DRYWALL MUD FLANGE)	
<b>TRIM FINISH</b> FINI CADRE <sup>(A)</sup>		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
	<sup>(A)</sup> AVAILABLE WITH TRIM OPTION ONLY	
<b>PROJECTOR FINISH</b> FINI PROJECTEURS		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
<b>ENCLOSURE FINISH</b> FINI BOÎTIER		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
<b>ACCESSORY</b> ACCESSOIRE		
19900-1X1	NEW CONSTRUCTION MOUNTING PLATE (FOR 12900-1X1)	
19900-2X1	NEW CONSTRUCTION MOUNTING PLATE (FOR 12900-2X1)	
19900-3X1	NEW CONSTRUCTION MOUNTING PLATE (FOR 12900-3X1)	
<b>EMERGENCY BATTERY ACCESSORY</b> ACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



1X1 - 6.20" (158mm) X 6.20" (158mm)  
2X1 - 11.35" (288mm) X 6.20" (158mm)  
3X1 - 16.50" (419mm) X 6.20" (158mm)

**DESIGN:** Outline is a modern and distinctive patented luminaire that creates a bold graphic statement. It challenges traditional notions of projector-type lighting with brilliant illumination. Without any visible hardware, the simple enclosure of the recessed version puts the focus on the projectors. With a simple push, Outline easily secures itself within the ceiling hole for a safe and quick installation. The Outline is suitable for new construction, remodeling and grid ceiling installation. For a seamless look, a trimless option is available.

**INSTALLATION:** A sturdy steel housing and injected aluminium projector heads coated in a high-quality fine texture finish.


**CONSTRUCTION:** The patented Halo lens combined with the glare-control ring create a uniform light beam with a smooth cut-off.

**OPTIC:** c-CSA-us


**CERTIFIED:** c-CSA-us

# OUTLINE SURFACE 46900


PROJECT PROJÉT
SPEC TYPE
NOTES

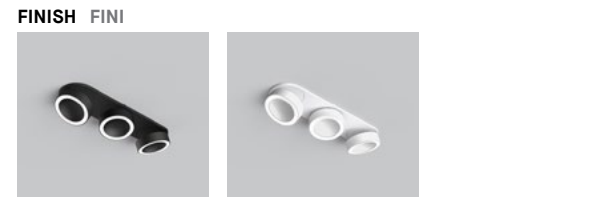

BLKE WHE

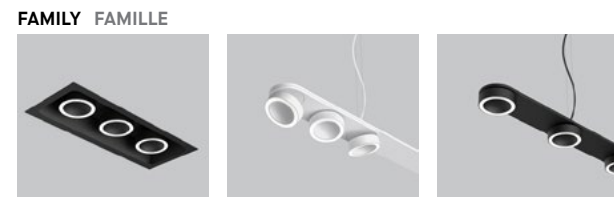

RECESSED (12900) SUSPENDED AIMABLE (74900) SUSPENDED FIXED (74901)

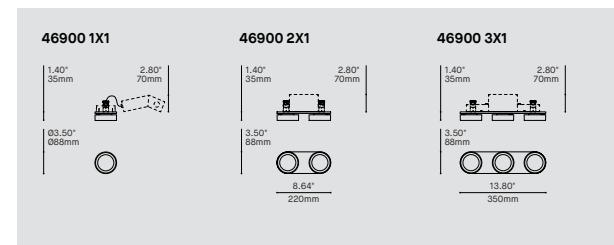

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE		
46900-1X1	OUTLINE SURFACE 1X1	
46900-2X1	OUTLINE SURFACE 2X1	
46900-3X1	OUTLINE SURFACE 3X1	
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE		
LED	REGULAR OUTPUT (IC RATED)	
LED.HO	HIGH OUTPUT (NON-IC RATED)	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI)</b> INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>VOLTAGE</b> VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
<b>DIMMING OPTION</b> OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE	
<b>EMERGENCY BATTERY</b> BATTERIE D'URGENCE		
	INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED	
<b>BEAM ANGLE</b> ANGLE DE FAISCEAU		ME
ME	MEDIUM (30°)	
<b>ENCLOSURE FINISH</b> FINI BOÎTIER		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
<b>EMERGENCY BATTERY ACCESSORY</b> ACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



1X1 - Ø 3.125" (80mm)  
2X1 - 7" (180mm) X 2" (50mm)  
3X1 - 12" (305mm) X 2" (50mm)

**DESIGN:** Outline is a modern and distinctive patented luminaire that creates a bold graphic statement. It challenges traditional notions of projector-type lighting with brilliant illumination. Each projector is equipped with a pivot that gives it a broad range of rotation and tilt.

**INSTALLATION:** With its recessed driver and connection box, the Outline surface version is quickly and securely installed on the ceiling with spring arms.

**CONSTRUCTION:** A machined plate and injected aluminium projectors coated in a high-quality fine texture finish.

**OPTIC:** The patented Halo lens combined with the glare-control ring create a uniform light beam with a smooth cut-off.

**CERTIFIED:** c-CSA-us

**CONCEPTION:** Outline est un luminaire breveté au design moderne, distinctif et graphique, qui redéfinit le concept typique de projecteur. Sa grande liberté d'orientation lui permet de mettre en valeur autant un mur qu'un couloir, et tout ce qui se trouve entre les deux.

**INSTALLATION:** Grâce à la boîte de connexion encastrée et le système de bras à ressort, la version surface s'installe facilement et rapidement.

**CONSTRUCTION:** Une plaque machinée jumelée à des projecteurs en aluminium revêtus d'une finition à texture fine de haute qualité.

**OPTIQUE:** La lentille brevetée et l'anneau anti-éblouissement produisent un faisceau de lumière parfaitement contrôlé avec une coupure en douceur.


**CERTIFIÉ:** c-CSA-us

# OUTLINE SUSPENDED AIMABLE 74900

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI

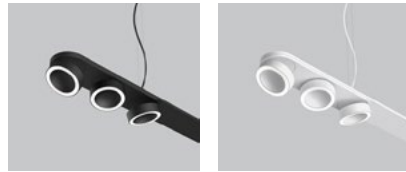

BLKE

WHE

## FAMILY FAMILLE





RECESSED (12900)

SURFACE (46900)

SUSPENDED FIXED (74901)

## MOUNTING OPTION OPTION DE MONTAGE

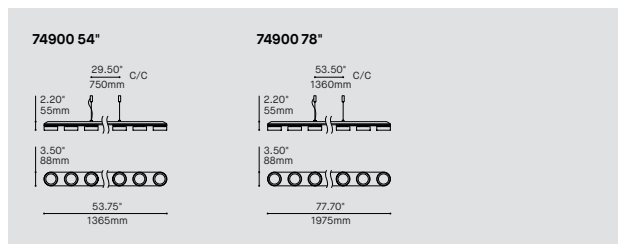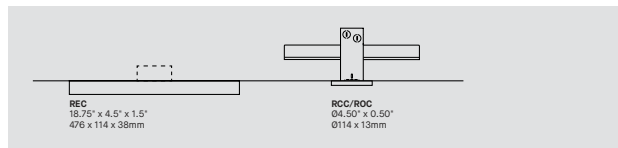

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	74900	CODE
<b>74900</b>	OUTLINE SUSPENDED AIMABLE	
<b>LIGHT SOURCE DIRECTION</b>	DIRECTION DE LA SOURCE LUMINEUSE	
<b>D</b>	DIRECT	
<b>DI*</b>	DIRECT & INDIRECT (DUAL DIMMING) *DOWNLIGHT AND UPLIGHT ARE DIMMED INDEPENDENTLY	
<b>LUMINAIRE LENGTH</b>	LONGUEUR DU LUMINAIRE	
<b>54</b>	54"	
<b>78</b>	78"	
<b>PROJECTOR CONFIGURATIONS</b>	CONFIGURATIONS DE PROJECTEURS	
	54"	
<b>2X2</b>	2 CLUSTERS OF 2 PROJECTORS – TOTAL OF 4	
<b>3X2</b>	3 CLUSTERS OF 2 PROJECTORS – TOTAL OF 6	
<b>2X3</b>	2 CLUSTERS OF 3 PROJECTORS – TOTAL OF 6	
	78"	
<b>3X2</b>	3 CLUSTERS OF 2 PROJECTORS – TOTAL OF 6	
<b>4X2</b>	4 CLUSTERS OF 2 PROJECTORS – TOTAL OF 8	
<b>2X3</b>	2 CLUSTERS OF 3 PROJECTORS – TOTAL OF 6	
<b>3X3*</b>	3 CLUSTERS OF 3 PROJECTORS – TOTAL OF 9	
<b>PROJECTOR LIGHT SOURCE</b>	SOURCE LUMINEUSE PROJECTEURS	
<b>LED.LO</b>	LOW OUTPUT	
<b>LED</b>	REGULAR OUTPUT	
<b>INDIRECT LIGHT SOURCE</b>	SOURCE LUMINEUSE INDIRECTE	
<b>LED.LO</b>	LOW OUTPUT	
<b>LED</b>	REGULAR OUTPUT	
<b>LED.HO</b>	HIGH OUTPUT	
<b>COLOR TEMPERATURE</b>	TEMPÉRATURE DE COULEUR	
<b>27*</b>	2700K	
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40</b>	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI)</b>	INDICE DE RENDU DE COULEUR (IRC)	
<b>80</b>	80+ CRI	
<b>90*</b>	90+ CRI	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>VOLTAGE</b>	VOLTAGE	
<b>120V</b>	120 VOLT	
<b>277V</b>	277 VOLT	
<b>DIMMING OPTION</b>	OPTION DE GRADATION	<b>DV</b>
<b>DV</b>	0-10V DIMMING (120V-277V)	
<b>EMERGENCY BATTERY</b>	BATTERIE D'URGENCE	
	INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
<b>EMB*</b>	EMERGENCY BATTERY FOR REMOTE BOX *3981EA ACCESSORY IS REQUIRED	
<b>BEAM ANGLE</b>	ANGLE DE FAISCEAU	<b>ME</b>
<b>ME</b>	MEDIUM (30°)	
<b>CABLE</b>	CÂBLE	<b>C</b>
<b>C*</b>	BLACK OR WHITE CABLE, FIELD ADJUSTABLE *CABLE FINISH IS COLOR MATCHING BODY FINISH	
<b>CABLE LENGTH</b>	LONGUEUR DE CÂBLE	
<b>60</b>	60" CABLE (STD LENGTH)	
<b>**</b>	CUSTOM CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>MOUNTING</b>	MONTAGE	
<b>REC</b>	RECTANGULAR CANOPY / PAVILLON RECTANGULAIRE	
<b>RCC*</b>	ROUND CENTERED CANOPY ON J-BOX FOR RECESSED DRIVER(S)	
<b>ROC*</b>	ROUND OFFSET CANOPY ON J-BOX FOR RECESSED DRIVER(S) *3981F ACCESSORY IS REQUIRED	
<b>CANOPY FINISH</b>	FINI PAVILLON <sup>(A)</sup>	
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>WHE</b>	WHITE FINE TEXTURE	
	<sup>(A)</sup> CEILING GRIPPER BLOCS FINISH ARE COLOR MATCHING CANOPY FINISH	
<b>HOUSING &amp; PROJECTOR</b>	BOTTIER & PROJECTEUR <sup>(B)</sup>	
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>WHE</b>	WHITE FINE TEXTURE	
	<sup>(B)</sup> PROJECTOR FINISH ARE COLOR MATCHING STRUCTURE FINISH	
<b>ACCESSORY</b>	ACCESSOIRE	
<b>3981F</b>	JUNCTION BOX FOR RECESSED DRIVER OPTION (RCC AND ROC)	
<b>EMERGENCY BATTERY ACCESSORY</b>	ACCESSOIRE BATTERIE D'URGENCE	
<b>3981EA</b>	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

# OUTLINE SUSPENDED FIXED 74901

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI



BLKE

WHE

## FAMILY FAMILLE





RECESSED (12900)

SURFACE (46900)

SUSPENDED AIMABLE (74900)

## MOUNTING OPTION OPTION DE MONTAGE

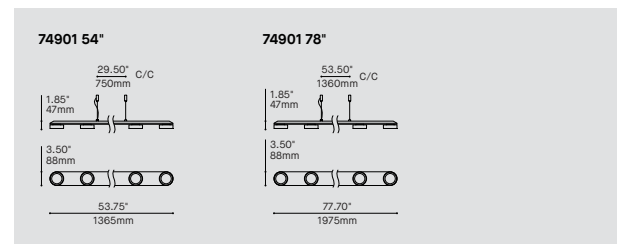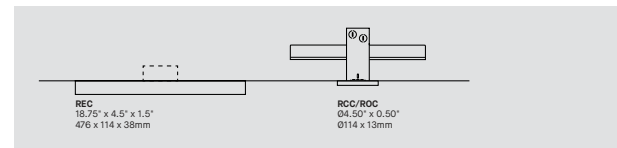

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	74901	CODE
<b>74901</b>	OUTLINE SUSPENDED FIXED	
<b>LIGHT SOURCE DIRECTION</b>	DIRECTION DE LA SOURCE LUMINEUSE	
<b>D</b>	DIRECT	
<b>DI*</b>	DIRECT & INDIRECT (DUAL DIMMING) *DOWNLIGHT AND UPLIGHT ARE DIMMED INDEPENDENTLY	
<b>LUMINAIRE LENGTH</b>	LONGUEUR DU LUMINAIRE	
<b>54</b>	54"	
<b>78</b>	78"	
<b>PROJECTOR CONFIGURATIONS</b>	CONFIGURATIONS DE PROJECTEURS	
	54"	
<b>4X1</b>	4 INDIVIDUAL PROJECTORS	
<b>6X1</b>	6 INDIVIDUAL PROJECTORS	
<b>2X2</b>	2 CLUSTERS OF 2 PROJECTORS – TOTAL OF 4	
<b>3X2</b>	3 CLUSTERS OF 2 PROJECTORS – TOTAL OF 6	
<b>2X3</b>	2 CLUSTERS OF 3 PROJECTORS – TOTAL OF 6	
	78"	
<b>6X1</b>	6 INDIVIDUAL PROJECTORS	
<b>9X1</b>	9 INDIVIDUAL PROJECTORS	
<b>3X2</b>	3 CLUSTERS OF 2 PROJECTORS – TOTAL OF 6	
<b>4X2</b>	4 CLUSTERS OF 2 PROJECTORS – TOTAL OF 8	
<b>2X3</b>	2 CLUSTERS OF 3 PROJECTORS – TOTAL OF 6	
<b>3X3</b>	3 CLUSTERS OF 3 PROJECTORS – TOTAL OF 9	
<b>PROJECTOR LIGHT SOURCE</b>	SOURCE LUMINEUSE PROJECTEURS	
<b>LED.LO</b>	LOW OUTPUT	
<b>LED</b>	REGULAR OUTPUT	
<b>INDIRECT LIGHT SOURCE</b>	SOURCE LUMINEUSE INDIRECTE	
<b>LED.LO</b>	LOW OUTPUT	
<b>LED</b>	REGULAR OUTPUT	
<b>LED.HO</b>	HIGH OUTPUT	
<b>COLOR TEMPERATURE</b>	TEMPÉRATURE DE COULEUR	
<b>27*</b>	2700K	
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40</b>	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>COLOR RENDERING INDEX (CRI)</b>	INDICE DE RENDU DE COULEUR (IRC)	
<b>80</b>	80+ CRI	
<b>90*</b>	90+ CRI	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>VOLTAGE</b>	VOLTAGE	
<b>120V</b>	120 VOLT	
<b>277V</b>	277 VOLT	
<b>DIMMING OPTION</b>	OPTION DE GRADATION	<b>DV</b>
<b>DV</b>	0-10V DIMMING (120V-277V)	
<b>EMERGENCY BATTERY</b>	BATTERIE D'URGENCE	
	INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
<b>EMB*</b>	EMERGENCY BATTERY FOR REMOTE BOX *3981EA ACCESSORY IS REQUIRED	
<b>BEAM ANGLE</b>	ANGLE DE FAISCEAU	<b>ME</b>
<b>ME</b>	MEDIUM (30°)	
<b>CABLE</b>	CÂBLE	<b>C</b>
<b>C*</b>	BLACK OR WHITE CABLE, FIELD ADJUSTABLE *CABLE FINISH IS COLOR MATCHING BODY FINISH	
<b>CABLE LENGTH</b>	LONGUEUR DE CÂBLE	
<b>60</b>	60" CABLE (STD LENGTH)	
<b>**</b>	CUSTOM CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
<b>MOUNTING</b>	MONTAGE	
<b>REC</b>	RECTANGULAR CANOPY / PAVILLON RECTANGULAIRE	
<b>RCC*</b>	ROUND CENTERED CANOPY ON J-BOX FOR RECESSED DRIVER(S)	
<b>ROC*</b>	ROUND OFFSET CANOPY ON J-BOX FOR RECESSED DRIVER(S) *3981F ACCESSORY IS REQUIRED	
<b>CANOPY FINISH</b>	FINI PAVILLON <sup>(A)</sup>	
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>WHE</b>	WHITE FINE TEXTURE	
	<sup>(A)</sup> CEILING GRIPPER BLOCS FINISH ARE COLOR MATCHING CANOPY FINISH	
<b>HOUSING &amp; PROJECTOR</b>	BOTTIER & PROJECTEUR <sup>(B)</sup>	
<b>BLKE</b>	BLACK FINE TEXTURE	
<b>WHE</b>	WHITE FINE TEXTURE	
	<sup>(B)</sup> PROJECTOR FINISH ARE COLOR MATCHING STRUCTURE FINISH	
<b>ACCESSORY</b>	ACCESSOIRE	
<b>3981F</b>	JUNCTION BOX FOR RECESSED DRIVER OPTION (RCC AND ROC)	
<b>EMERGENCY BATTERY ACCESSORY</b>	ACCESSOIRE BATTERIE D'URGENCE	
<b>3981EA</b>	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

# PHOTOMETRIC REPORT

## SINGLE PROJECTOR LOW

CCT (K): 4000  
 Delivered Lumens (lm): 405  
 System wattage (W)\*: 5.0  
 Distribution: Direct  
 Delivered Efficacy (lm/W): 81  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.5 (88)  
 90-270 Axis: 3.5 (88)  
 Height: 0.0 (0)

### Luminaire spacing criteria

2 luminaires, plane 0: 0.54  
 2 luminaires, plane 90: 0.54  
 4 luminaires: 0.58

## SINGLE PROJECTOR REG

CCT (K): 4000  
 Delivered Lumens (lm): 733  
 System wattage (W)\*: 8.7  
 Distribution: Direct  
 Delivered Efficacy (lm/W): 84  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.5 (88)  
 90-270 Axis: 3.5 (88)  
 Height: 0.0 (0)

### Luminaire spacing criteria

2 luminaires, plane 0: 0.54  
 2 luminaires, plane 90: 0.54  
 4 luminaires: 0.58

## SINGLE PROJECTOR HO

CCT (K): 4000  
 Delivered Lumens (lm): 1245  
 System wattage (W)\*: 14.8  
 Distribution: Direct  
 Delivered Efficacy (lm/W): 84  
 Photometric type: C




### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.5 (88)  
 90-270 Axis: 3.5 (88)  
 Height: 0.0 (0)

### Luminaire spacing criteria

2 luminaires, plane 0: 0.54  
 2 luminaires, plane 90: 0.54  
 4 luminaires: 0.58

\*System wattage include driver and LED module consumption

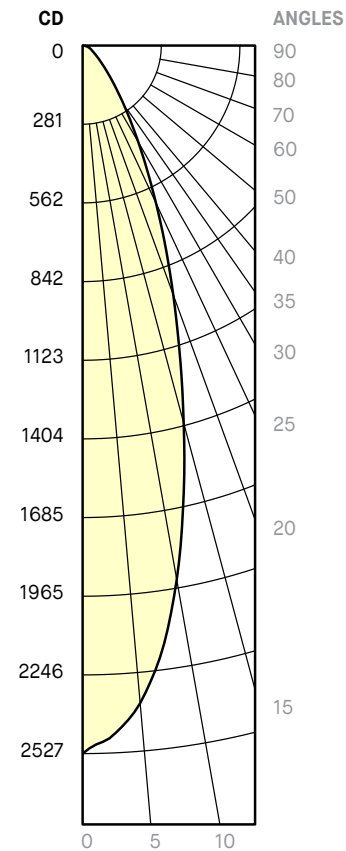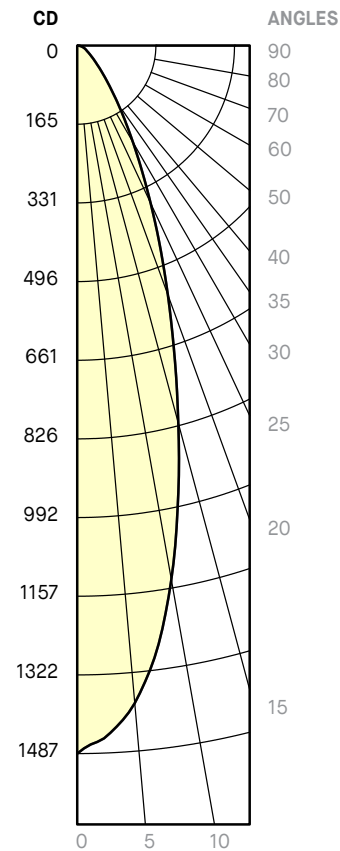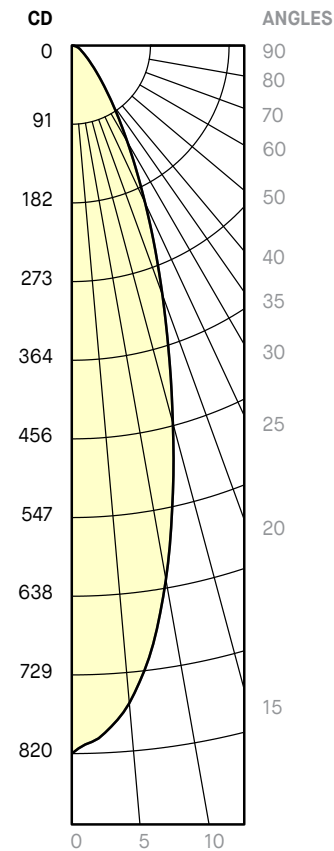

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



# PHOTOMETRIC REPORT

## 7490XDI-78 UPLIGHT LOW

CCT (K): 4000  
 Delivered Lumens (lm): 3005  
 System wattage (W)\*: 22.9  
 Distribution: Indirect  
 Delivered Efficacy (lm/W): 131  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.9 (100)  
 90-270 Axis: 78.7 (2000)  
 Height: 0.0 (0)

## 7490XDI-78 UPLIGHT REG

CCT (K): 4000  
 Delivered Lumens (lm): 5862  
 System wattage (W)\*: 47.5  
 Distribution: Indirect  
 Delivered Efficacy (lm/W): 123  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.9 (100)  
 90-270 Axis: 78.7 (2000)  
 Height: 0.0 (0)




## 7490XDI-78 UPLIGHT HO

CCT (K): 4000  
 Delivered Lumens (lm): 8552  
 System wattage (W)\*: 74.5  
 Distribution: Indirect  
 Delivered Efficacy (lm/W): 115  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.9 (100)  
 90-270 Axis: 78.7 (2000)  
 Height: 0.0 (0)

\*System wattage include driver and LED module consumption

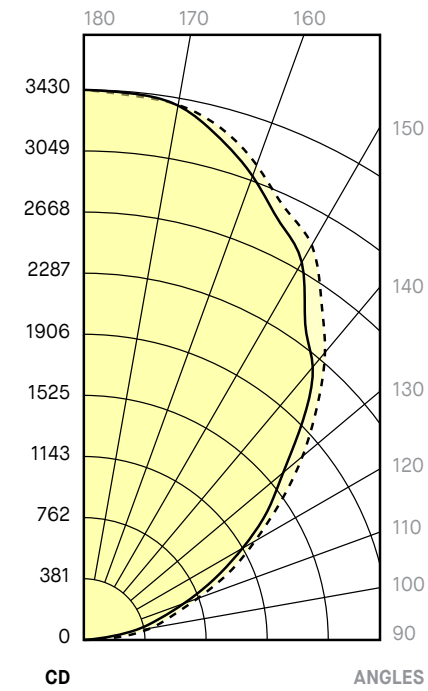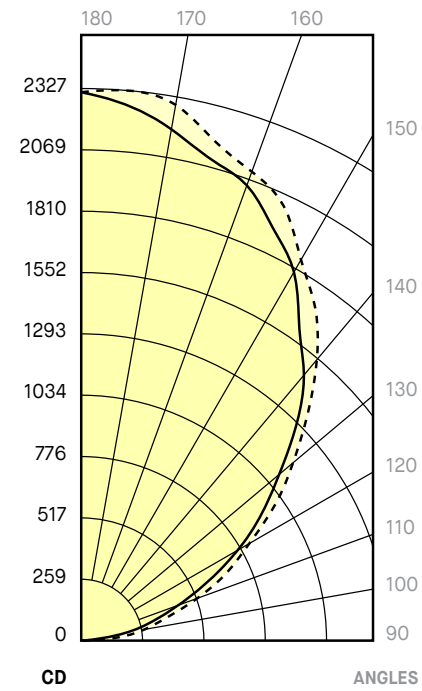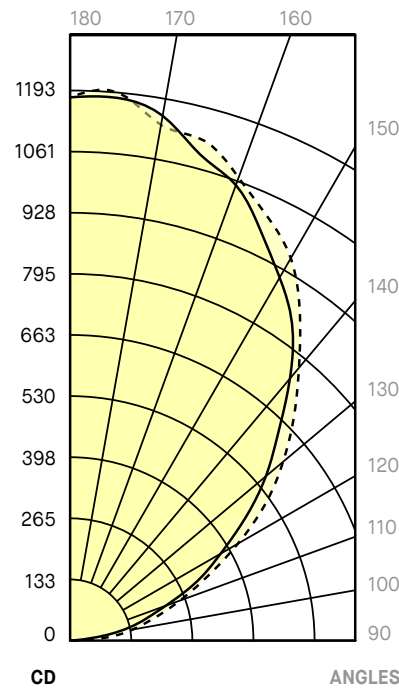

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



# PHOTOMETRIC REPORT

## 7490XDI-54 UPLIGHT LOW

CCT (K): 4000  
 Delivered Lumens (lm): 1960  
 System wattage (W)\*: 15.7  
 Distribution: Indirect  
 Delivered Efficacy (lm/W): 125  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.9 (100)  
 90-270 Axis: 55.1 (1400)  
 Height: 0.0 (0)

## 7490XDI-54 UPLIGHT REG

CCT (K): 4000  
 Delivered Lumens (lm): 2824  
 System wattage (W)\*: 32.3  
 Distribution: Indirect  
 Delivered Efficacy (lm/W): 118  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.9 (100)  
 90-270 Axis: 55.1 (1400)  
 Height: 0.0 (0)




## 7490XDI-54 UPLIGHT HO

CCT (K): 4000  
 Delivered Lumens (lm): 5580  
 System wattage (W)\*: 50.1  
 Distribution: Indirect  
 Delivered Efficacy (lm/W): 111  
 Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
 Units: in (mm)  
 0-180 Axis: 3.9 (100)  
 90-270 Axis: 55.1 (1400)  
 Height: 0.0 (0)

\*System wattage include driver and LED module consumption

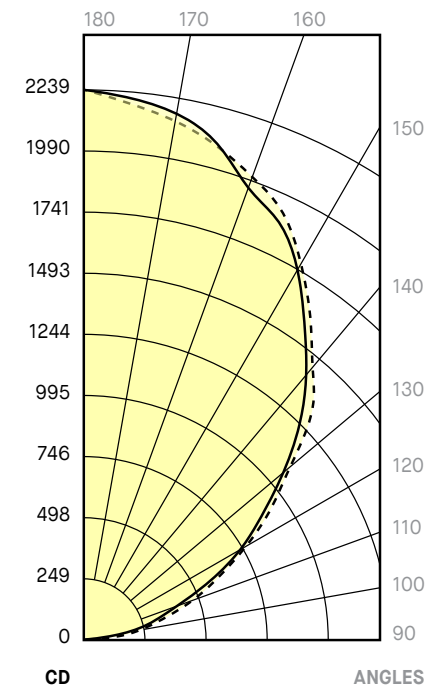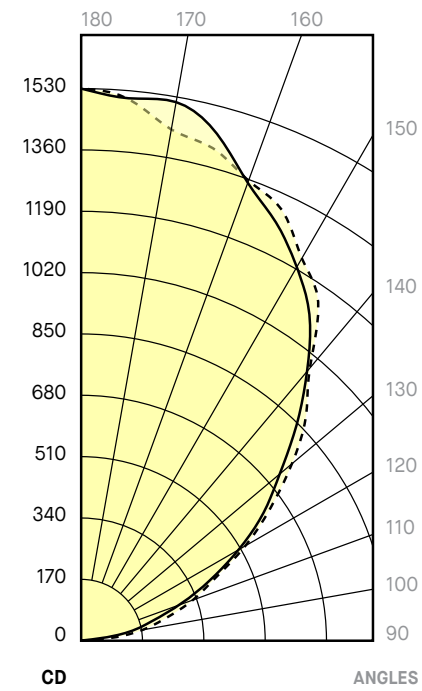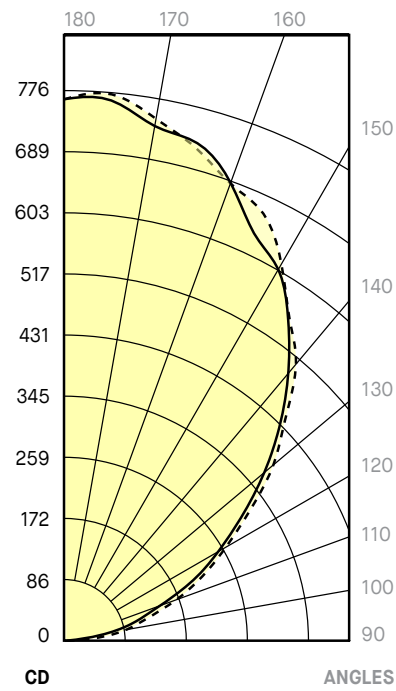

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



