


ONE BIG FAMILY

Multiplying by options of Mountings types, Product finishes, Optical Accessories, CCT, Beam angles, Output, Dimming type; Scout family offers over 19,000 different option combinations.







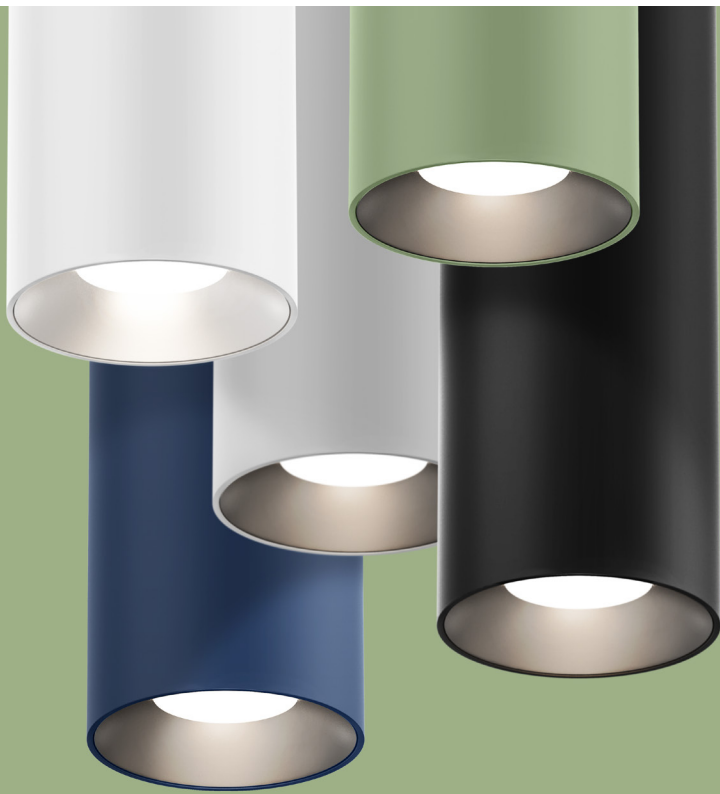

SHOW YOUR COLORS

Five beautiful extramatte paint colors: Pale Green, White, Black, Light Gray, Navy Blue. Custom finishes also available. Please consult factory for more options.



PICK YOUR ANGLE

Scout is offered with several beam angles according to its diameter. Combined with two light outputs (regular and high), Scout is always prepared to light up your environment.




SCOUT 3048


PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI

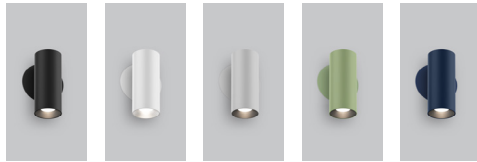

BLKE WHE LGE PGE NBE

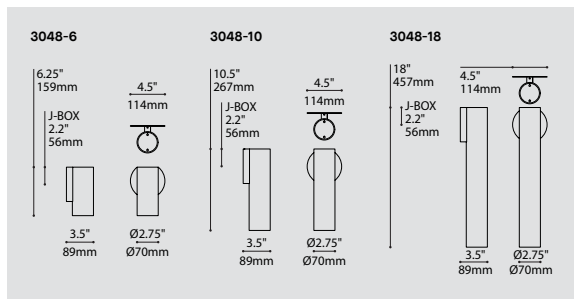

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE

3048-6 SCOUT 6"
3048-10 SCOUT 10"
3048-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K
30 3000K
35 3500K
40 4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI
90* 90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL

*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT).

*EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS

REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY, SEE EM GUIDE FOR DETAILS.

EMB* EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (24°)
ME MEDIUM (45°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
FRO FROSTED GLASS LENS
HON HONEYCOMB LOUVER
SOL SOLITE SOFTENING LENS

CYLINDER FINISH FINI CYLINDRE

CANOPY HAS ALWAYS SAME FINISH AS CYLINDER

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

LGE LIGHT GREY FINE TEXTURE

PGE PALE GREEN FINE TEXTURE

NBE NAVY BLUE FINE TEXTURE

RAL* PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED FOR 3048-6)

39NLAA NLIGHT AIR GEN 2 REMOTE POWER PACK

39NLWA NLIGHT WIRED REMOTE POWER PACK

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



SCOUT 3049


PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE WHE LGE PGE NBE

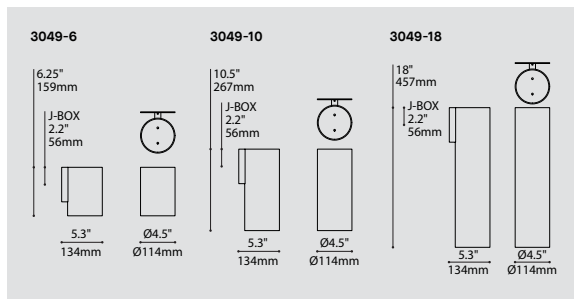

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

3049-6 SCOUT 6"
 3049-10 SCOUT 10"
 3049-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
 LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K
 30 3000K
 35 3500K
 40 4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI
 90* 90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
 DP PHASE DIMMING (120V ONLY)
 NLTAIR2* NLIGHT AIR CONTROL GEN 2
 NLIGHT* NLIGHT WIRED CONTROL

* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).
 * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
 REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-227V. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB* EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (28°)
 ME MEDIUM (48°)
 WI WIDE (64°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
 FRO FROSTED GLASS LENS
 HON HONEYCOMB LOUVER
 SOL SOLITE SOFTENING LENS

CYLINDER FINISH FINI CYLINDRE

CANOPY HAS ALWAYS SAME FINISH AS CYLINDER

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE
 LGE LIGHT GREY FINE TEXTURE
 PGE PALE GREEN FINE TEXTURE
 NBE NAVY BLUE FINE TEXTURE
 RAL* PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED FOR 3049-6)
 39NLAA NLIGHT AIR GEN 2 REMOTE POWER PACK
 39NLWA NLIGHT WIRED REMOTE POWER PACK

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



SCOUT 4048

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE WHE LGE PGE NBE

OVERALL HEIGHT HAUTEUR HORS TOUT

	LED TRACK 1 CIRCUIT CABLE	LED TRACK 1 CIRCUIT STEM	LED 0.50" CANOPY CABLE	LED 0.50" CANOPY STEM	LED NLIGHT 1.30" CANOPY CABLE	LED NLIGHT 1.30" CANOPY STEM
	2734E	2734E	2471C	2471C	2474H	2474H
4048-6	66.95"	42.95"	69.70"	45.70"	70.50"	46.50"
4048-10	71.20"	47.20"	73.95"	49.95"	74.75"	50.75"
4048-18	78.70"	54.70"	81.45"	57.45"	82.25"	58.25"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734E	2471C	2474H - WIRED	2474H - AIR
6.15" x 3.00" 156 x 53mm	04.50" x 0.50" 0114 x 13mm	07.75" x 1.30" 0198.8 x 33mm	07.75" x 1.30" 0198.8 x 33mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

CABLE	STEM
STD 60" 1524mm	STD 36" 914mm

4048-6	4048-10	4048-18
6.25" 159mm	10.5" 267mm	18" 457mm
Ø2.75" Ø70mm	Ø2.75" Ø70mm	Ø2.75" Ø70mm

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4048-6	SCOUT 6"
4048-10	SCOUT 10"
4048-18	SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V*	277 VOLT

*NOT AVAILABLE FOR TRACK ADAPTOR

CONTROL OPTION OPTION DE CONTRÔLE

DV**	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLIGHTR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY.
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.
**NOT AVAILABLE FOR TRACK ADAPTOR
* FOR NLIGHT AIR AND STEM PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

EMERGENCY BATTERY BATTERIE D'URGENCE

COMPATIBLE WITH RC MOUNTING ONLY. FOR 120-227V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS. WITH DV DIMMING OPTION (FOR 4048-10 & 4048-18) AN ADDITIONAL POWERCABLE WILL DROP FROM CEILING NEXT TO MAIN CABLE.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX
------	----------------------------------

* 3981EA ACCESSORY IS REQUIRED
*NOT AVAILABLE WITH STEM

BEAM ANGLE ANGLE DE FAISCEAU

NA	NARROW (24°)
ME	MEDIUM (45°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR	CLEAR GLASS LENS
FRO	FROSTED GLASS LENS
HON	HONEYCOMB LOUVER
SOL	SOLITE SOFTENING LENS

STEM OR CABLE TIGE OU CABLE

S10*	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE

*FOR WHITE SHADE: WHITE CABLE OR STEM
FOR OTHER SHADE FINISH: BLACK CABLE OR STEM

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

36	36" CABLE (STD LENGTH)
60	60" CABLE (STD LENGTH)
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC1*	ROUND CANOPY / PAVILLON ROND
RC2	SCREWLESS 0.5" CANOPY (2471C)

NLIGHT SCREWLESS CANOPY 07.75" X 1.30" (2474H)
* 3983 ACCESSORY PROVIDED FOR 4048-6 WITH 2471C CANOPY

TA1	TRACK ADAPTOR / ADAPTEUR DE RAIL
-----	----------------------------------

1 CIRCUIT
LED DIMMING 120V ADAPTOR (2734E)

TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL (A)

BLK	BLACK
WH	WHITE

** FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

CANOPY FINISH FINI PAVILLON (B)

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

** FILL IN IF A CANOPY IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
LGE	LIGHT GREY FINE TEXTURE
PGE	PALE GREEN FINE TEXTURE
NBE	NAVY BLUE FINE TEXTURE
RAL*	PLEASE SPECIFY RAL CODE

*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983	DEEP JUNCTION BOX (PROVIDED FOR 4048-6 WITH CANOPY)
------	---

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY
--------	--

SCOUT 4048

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES



FINISH FINI



BLKE

WHE



OVERALL HEIGHT HAUTEUR HORS TOUT

	LED 0.50" CANOPY
MOUNTING	2471C
CABLE & 4048-6	69.70"
CABLE & 4048-10	73.95"
CABLE & 4048-18	81.45"

MOUNTING OPTIONS OPTIONS DE MONTAGE



STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

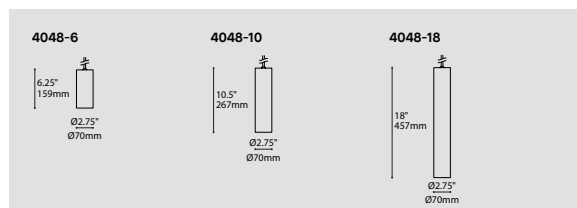

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4048-6 SCOUT 6"
 4048-10 SCOUT 10"
 4048-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
 LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K
 40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)
 DP PHASE DIMMING (120V ONLY)
 LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (24°)
 ME MEDIUM (45°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
 FRO FROSTED GLASS LENS
 HON HONEYCOMB LOUVER
 SOL SOLITE SOFTENING LENS

CABLE CABLE

C* BLACK OR WHITE CABLE, FIELD ADJUSTABLE
 *FOR WHITE STRUCTURE: WHITE CABLE, FOR OTHER STRUCTURE FINISH: BLACK CABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" CABLE (STD LENGTH)
 ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC ROUND CANOPY / PAVILLON ROND
 SCREWLESS 0.5" CANOPY (2471C)

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

CYLINDER FINISH FINI CYLINDRE

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED FOR 4048-6 WITH CANOPY)

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

SCOUT 4049

PROJECT PROJET
SPEC TYPE
NOTES



FINISH FINI




BLKE WHE LGE PGE NBE



OVERALL HEIGHT HAUTEUR HORS TOUT

	LED TRACK 1 CIRCUIT CABLE	LED TRACK 1 CIRCUIT STEM	LED 0.50" CANOPY 2471C	LED 0.50" CANOPY STEM	LED NLIGHT 1.30" CANOPY 2474H	LED NLIGHT 1.30" CANOPY STEM
4049-6	2734E	2734E	2471C	2471C	2474H	2474H
4049-10	66.95"	42.95"	69.70"	45.70"	70.50"	46.50"
4049-18	71.20"	47.20"	73.95"	49.95"	74.75"	50.75"
4049-18	78.70"	54.70"	81.45"	57.45"	82.25"	58.25"

MOUNTING OPTIONS OPTIONS DE MONTAGE



STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

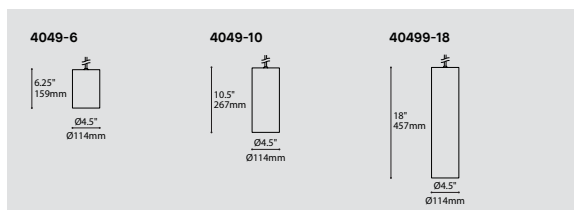

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE	
4049-6	SCOUT 6"
4049-10	SCOUT 10"
4049-18	SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V*	277 VOLT

* NOT AVAILABLE FOR TRACK ADAPTOR

CONTROL OPTION OPTION DE CONTRÔLE

DV**	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES R022 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.
** NOT AVAILABLE FOR TRACK ADAPTOR
* FOR NLIGHT AIR AND STEM PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

EMERGENCY BATTERY BATTERIE D'URGENCE

COMPATIBLE WITH RC MOUNTING ONLY. FOR 120-227V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.
WITH DV DIMMING OPTION (FOR 4049-10 & 4049-18) AN ADDITIONAL POWERCABLE WILL DROP FROM CEILING NEXT TO MAIN CABLE.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX
------	----------------------------------

* 3981EA ACCESSORY IS REQUIRED
* NOT AVAILABLE WITH STEM

BEAM ANGLE ANGLE DE FAISCEAU

NA	NARROW (28°)
ME	MEDIUM (48°)
WI	WIDE (64°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR	CLEAR GLASS LENS
FRO	FROSTED GLASS LENS
HON	HONEYCOMB LOUVER
SOL	SOLITE SOFTENING LENS

STEM OR CABLE TIGE OU CABLE

S10*	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE

* FOR WHITE SHADE: WHITE CABLE OR STEM
* FOR OTHER SHADE FINISH: BLACK CABLE OR STEM

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

36	36" CABLE (STD LENGTH)
60	60" CABLE (STD LENGTH)
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC1*	ROUND CANOPY / PAVILLON ROND
RC2	SCREWLESS 0.5" CANOPY (2471C)
TA1	NLIGHT SCREWLESS CANOPY 0.75" X 1.30" (2474H)

* 3983 ACCESSORY PROVIDED FOR 4049-6 WITH 2471C CANOPY
TRACK ADAPTOR / ADAPTEUR DE RAIL
1 CIRCUIT
LED DIMMING 120V ADAPTOR (2734E)

TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL (A)

BLK	BLACK
WH	WHITE

* FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

CANOPY FINISH FINI PAVILLON (B)

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

* FILL IN IF A CANOPY IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
LGE	LIGHT GREY FINE TEXTURE
PGE	PALE GREEN FINE TEXTURE
NBE	NAVY BLUE FINE TEXTURE
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983	DEEP JUNCTION BOX (PROVIDED FOR 4049-6 WITH CANOPY)
------	---

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY
--------	--

SCOUT 4049

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES



FINISH FINI



BLKE

WHE



OVERALL HEIGHT HAUTEUR HORS TOUT

	LED 0.50" CANOPY
MOUNTING	2471C
CABLE & 4049-6	69.70"
CABLE & 4049-10	73.95"
CABLE & 4049-18	81.45"

MOUNTING OPTIONS OPTIONS DE MONTAGE



STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

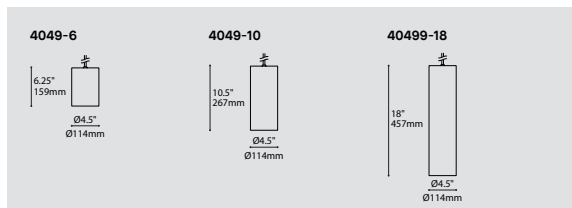

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4049-6 SCOUT 6"
 4049-10 SCOUT 10"
 4049-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
 LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K
 40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)
 DP PHASE DIMMING (120V ONLY)
 LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (28°)
 ME MEDIUM (48°)
 WI WIDE (64°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
 FRO FROSTED GLASS LENS
 HON HONEYCOMB LOUVER
 SOL SOLITE SOFTENING LENS

CABLE CABLE

C* BLACK OR WHITE CABLE, FIELD ADJUSTABLE
 *FOR WHITE STRUCTURE: WHITE CABLE, FOR OTHER STRUCTURE FINISH: BLACK CABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" CABLE (STD LENGTH)
 ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC ROUND CANOPY / PAVILLON ROND
 SCREWLESS 0.5" CANOPY (2471C)

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

CYLINDER FINISH FINI CYLINDRE

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED FOR 4049-6 WITH CANOPY)

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

SCOUT 4548


PROJECT / PROJET
SPEC TYPE
NOTES



FINISH FINI



BLKE WHE LGE PGE NBE RDP

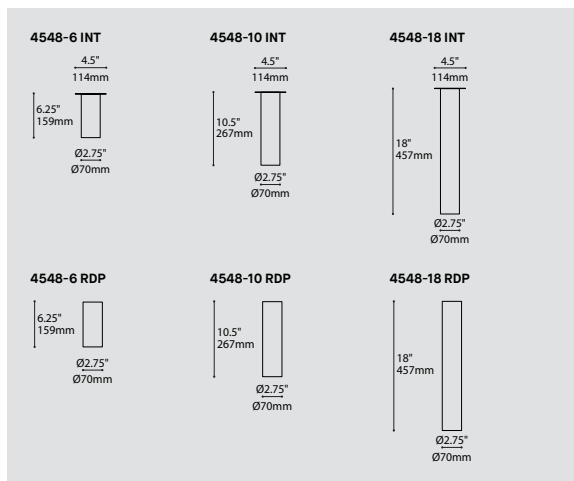

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



CERTIFIED: c-CSA-us

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL	MODÈLE
4548-6	SCOUT 6"
4548-10	SCOUT 10"
4548-18	SCOUT 18"

LIGHT SOURCE	SOURCE LUMINEUSE
LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR
27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)
80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE	VOLTAGE
120V	120 VOLT
277V	277 VOLT

CONTROL OPTION	OPTION DE CONTRÔLE
DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY	BATTERIE D'URGENCE
EMB*	EMERGENCY BATTERY FOR REMOTE BOX

FOR 120-227V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.
* 3981EA ACCESSORY IS REQUIRED

BEAM ANGLE	ANGLE DE FAISCEAU
NA	NARROW (24°)
ME	MEDIUM (45°)

OPTICAL ACCESSORIES	ACCESSOIRES OPTIQUES
CLR	CLEAR GLASS LENS
FRO	FROSTED GLASS LENS
HON	HONEYCOMB LOUVER
SOL	SOLITE SOFTENING LENS

DRIVER & CANOPY OPTION	OPTION DE PILOTE & PAVILLON
INT*	INTERNAL DRIVER, WITH FLAT CANOPY
RDP**	RECESSED DRIVER, NO CANOPY

* FOR 4548-6, DRIVER WILL BE IN DEEP JUNCTION BOX
** RDP OPTION IS NOT OFFERED WITH NLIGHT CONTROL OPTION

CANOPY FINISH	FINI PAVILLON ^(A)
WHE*	WHITE FINE TEXTURE

* IF NO FINISH IS SELECTED, FLAT CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH
(A) FILL IN IF INT DRIVER & CANOPY OPTION AND WHE FINISH IS SELECTED, OTHERWISE LEAVE EMPTY

CYLINDER FINISH	FINI CYLINDRE
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
LGE	LIGHT GREY FINE TEXTURE
PGE	PALE GREEN FINE TEXTURE
NBE	NAVY BLUE FINE TEXTURE
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BAFFLE FINISH	FINI DÉFLECTEUR
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

ACCESSORY	ACCESSOIRE
3983	DEEP JUNCTION BOX (PROVIDED FOR 4548-6 WITH INT OPTION)
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA*	NLIGHT WIRED REMOTE POWER PACK

* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .

EMERGENCY BATTERY ACCESSORY	ACCESSOIRE BATTERIE D'URGENCE
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

SCOUT 4548

QUICKSHIP


PROJECT PROJET

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE RDP

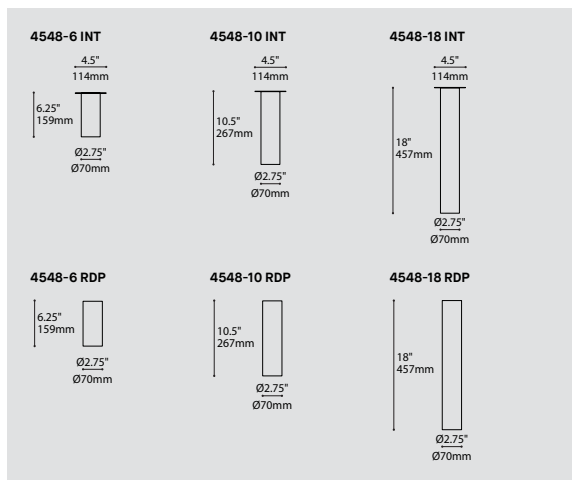

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4548-6 SCOUT 6"
 4548-10 SCOUT 10"
 4548-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
 LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K
 40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)
 DP PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (24°)
 ME MEDIUM (45°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
 FRO FROSTED GLASS LENS
 HON HONEYCOMB LOUVER
 SOL SOLITE SOFTENING LENS

DRIVER & CANOPY OPTION OPTION DE PILOTE & PAVILLON

INT* INTERNAL DRIVER, WITH FLAT CANOPY
 RDP RECESSED DRIVER, NO CANOPY

*FOR 4548-6, DRIVER WILL BE IN DEEP JUNCTION BOX

CANOPY FINISH FINI PAVILLON (A)

WHE* WHITE FINE TEXTURE

*IF NO FINISH IS SELECTED, FLAT CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH

(A) FILL IN IF INT DRIVER & CANOPY OPTION AND WHE FINISH IS SELECTED, OTHERWISE LEAVE EMPTY

CYLINDER FINISH FINI CYLINDRE

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED FOR 4548-6 WITH INT OPTION)

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



CERTIFIED: c-CSA-us

SCOUT 4549


PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE WHE LGE PGE NBE

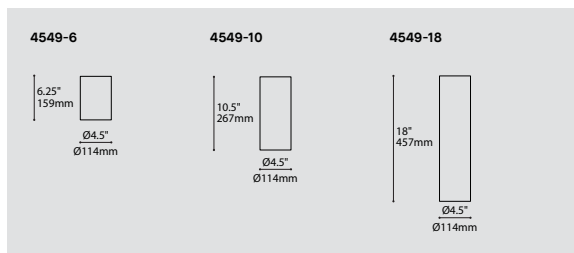

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4549-6 SCOUT 6"
4549-10 SCOUT 10"
4549-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K
30 3000K
35 3500K
40 4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI
90* 90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL

* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY, SEE EM GUIDE FOR DETAILS.

EMB* EMERGENCY BATTERY FOR REMOTE BOX
*3981EA ACCESSORY IS REQUIRED

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (28°)
ME MEDIUM (48°)
WI WIDE (64°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
FRO FROSTED GLASS LENS
HON HONEYCOMB LOUVER
SOL SOLITE SOFTENING LENS

CYLINDER FINISH FINI CYLINDRE

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE
LGE LIGHT GREY FINE TEXTURE
PGE PALE GREEN FINE TEXTURE
NBE NAVY BLUE FINE TEXTURE
RAL* PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED FOR 4549-6)
39NLAA* NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA* NLIGHT WIRED REMOTE POWER PACK

*FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



SCOUT 4549

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES




FINISH FINI



BLKE

WHE

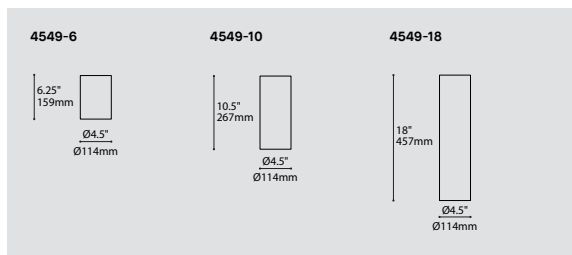

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4549-6 SCOUT 6"
 4549-10 SCOUT 10"
 4549-18 SCOUT 18"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
 LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K
 40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)
 DP PHASE DIMMING (120V ONLY)
 LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE

BEAM ANGLE ANGLE DE FAISCEAU

NA NARROW (28°)
 ME MEDIUM (48°)
 WI WIDE (64°)

OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES

CLR CLEAR GLASS LENS
 FRO FROSTED GLASS LENS
 HON HONEYCOMB LOUVER
 SOL SOLITE SOFTENING LENS

CYLINDER FINISH FINI CYLINDRE

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

BAFFLE FINISH FINI DÉFLECTEUR

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE


3983 DEEP JUNCTION BOX (PROVIDED FOR 4549-6)

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **EMB** **IES** **LED**

TECHNICAL DATA

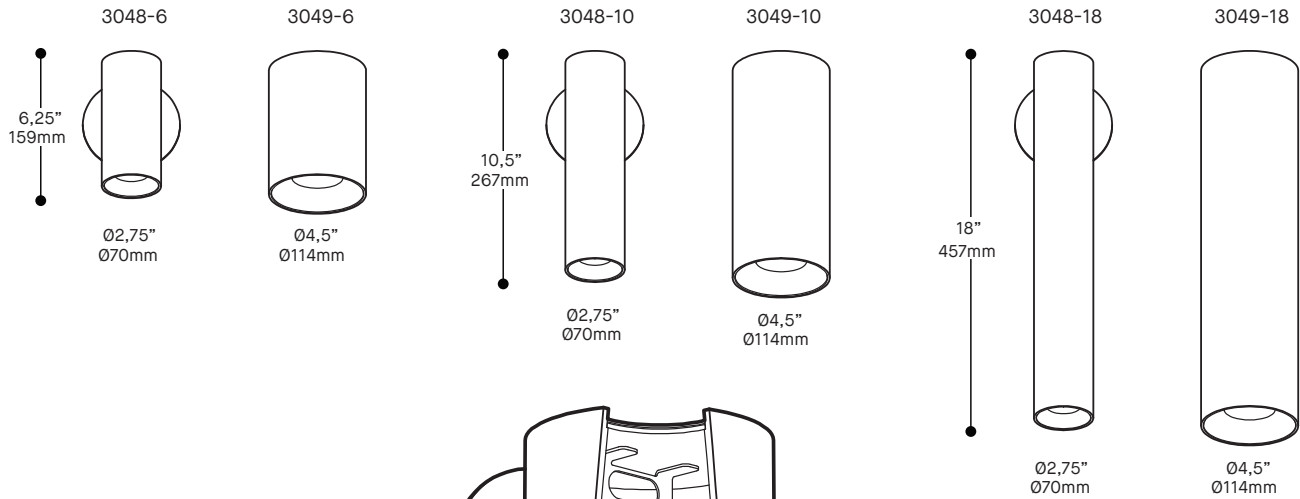

3 MOUNTING OPTIONS
Minimalist installation without any visible fasteners.
Also available as pendant and ceiling mount.

6 FORMATS & 5 FINISHES
Machined aluminium cylindrical structure,
offered in textured black, white, light gray,
navy blue or pale green finish.

2 BAFFLE FINISHES
White or black, two options to fit your needs.

2 DIMMING TYPE
Standard phase dimming (DP) or 0-10V dimming (DV).
Integrated LED driver (304x-10 et 304x-18).
Deep junction box (3983) included (304x-6).


2 OUTPUTS & 3 CCT
Extruded aluminium heatsink designed to
efficiently offer regular and high output.

REFLECTORS & 3 OPTICAL ACCESSORIES
Narrow, medium or wide (xx49 only) beam angle
reflector. Choice of optical accessories : clear lens,
frosted lens or honeycomb louver.


PRODUCT SPECIFICATION	XX48-NA		XX48-ME		XX49-NA		XX49-ME		XX49-WI	
	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO
PERFORMANCE										
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W
OTHER INFORMATIONS										
BEAM ANGLE	24°		45°		28°		48°		64°	
LUMINAIRE'S WEIGHT	1.29KG / 1.48KG / 1.81KG		1.29KG / 1.48KG / 1.81KG		1.72KG / 2.09KG / 2.601KG		1.72KG / 2.09KG / 2.601KG		1.72KG / 2.09KG / 2.601KG	
L70 (LUMEN MAINTENANCE)	2.83LBS/ 3.25LBS/ 3.99LBS > 63 600 HRS		2.83LBS/ 3.25LBS/ 3.99LBS > 63 600 HRS		3.79LBS/ 4.59LBS/ 5.72LBS > 63 600 HRS		3.79LBS/ 4.59LBS/ 5.72LBS > 63 600 HRS		3.79LBS/ 4.59LBS/ 5.72LBS > 63 600 HRS	

EFFICACY MULTIPLIERS


CRI	CCT	FACTOR
80+	4000K	1.0
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

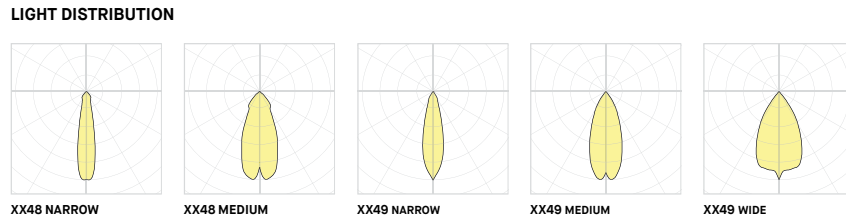

TECHNICAL DATA

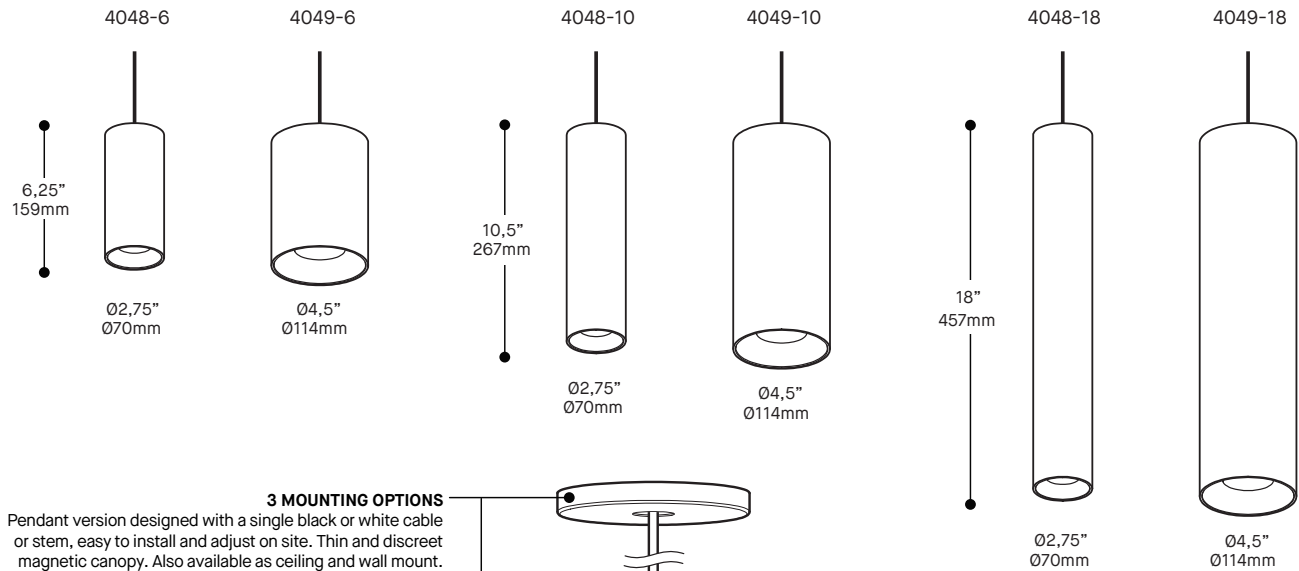


3 MOUNTING OPTIONS
Pendant version designed with a single black or white cable or stem, easy to install and adjust on site. Thin and discreet magnetic canopy. Also available as ceiling and wall mount.



Available on track, on a small track adaptor box with integrated LED driver.

6 FORMATS & 5 FINISHES
Machined aluminium cylindrical structure, offered in textured black, white, light gray, navy blue or pale green finish.

2 BAFFLE FINISHES
White or black, two options to fit your needs.

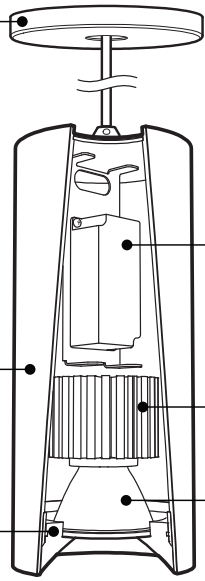

2 DIMMING TYPE
Standard phase dimming (DP) or 0-10V dimming (DV).
Integrated LED driver (404x-10 et 404x-18).
Deep junction box (3983) included (404x-6).


2 OUTPUTS & 3 CCT
Extruded aluminium heatsink designed to efficiently offer regular and high output.

REFLECTORS & 3 OPTICAL ACCESSORIES
Narrow, medium or wide (xx49 only) beam angle reflector.
Choice of optical accessories : clear lens, frosted lens or honeycomb louver.


PRODUCT SPECIFICATION	XX48-NA		XX48-ME		XX49-NA		XX49-ME		XX49-WI	
	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO
PERFORMANCE										
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021 LM
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W
OTHER INFORMATIONS										
BEAM ANGLE	24°		45°		28°		48°		64°	
LUMINAIRE'S WEIGHT	1.44KG / 1.63KG / 1.96KG		1.44KG / 1.63KG / 1.96KG		1.87KG / 2.24KG / 2.75KG		1.87KG / 2.24KG / 2.75KG		1.87KG / 2.24KG / 2.75KG	
L70 (LUMEN MAINTENANCE)	3.16LBS/ 3.58LBS/ 4.32LBS		3.16LBS/ 3.58LBS/ 4.32LBS		4.12LBS/ 4.92LBS/ 6.05LBS		4.12LBS/ 4.92LBS/ 6.05LBS		4.12LBS/ 4.92LBS/ 6.05LBS	
	> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS	

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.0
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

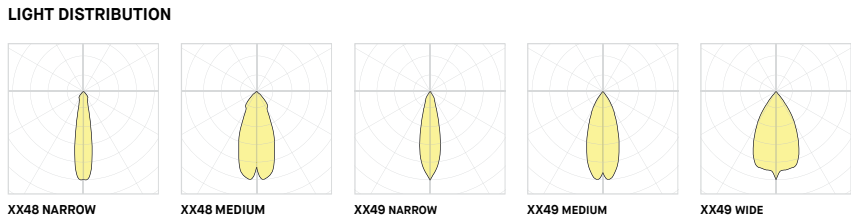

TECHNICAL DATA

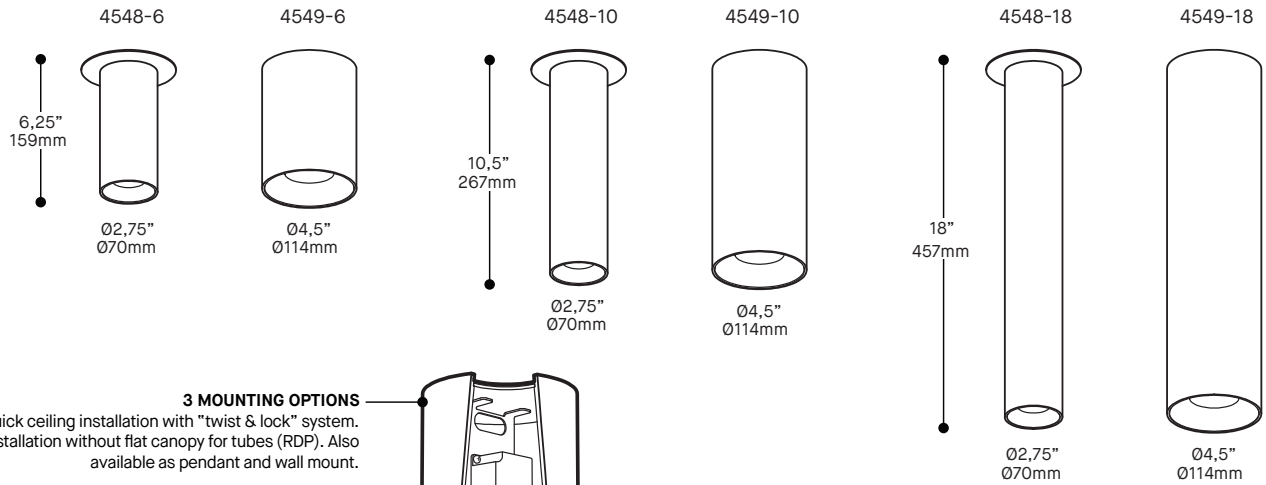

3 MOUNTING OPTIONS
Quick ceiling installation with "twist & lock" system. Installation without flat canopy for tubes (RDP). Also available as pendant and wall mount.


6 FORMATS & 5 FINISHES
Machined aluminium cylindrical structure, offered in textured black, white, light gray, navy blue or pale green finish.

2 BAFFLE FINISHES
White or black, two options to fit your needs.

2 DIMMING TYPE
Standard phase dimming (DP) or 0-10V dimming (DV). Integrated LED driver (454x-10 et 454x-18). Deep junction box (3983) included (454x-6).

2 OUTPUTS & 3 CCT
Extruded aluminium heatsink designed to efficiently offer regular and high output.


REFLECTORS & 3 OPTICAL ACCESSORIES
Narrow, medium or wide (xx49 only) beam angle reflector. Choice of optical accessories : clear lens, frosted lens or honeycomb louver.

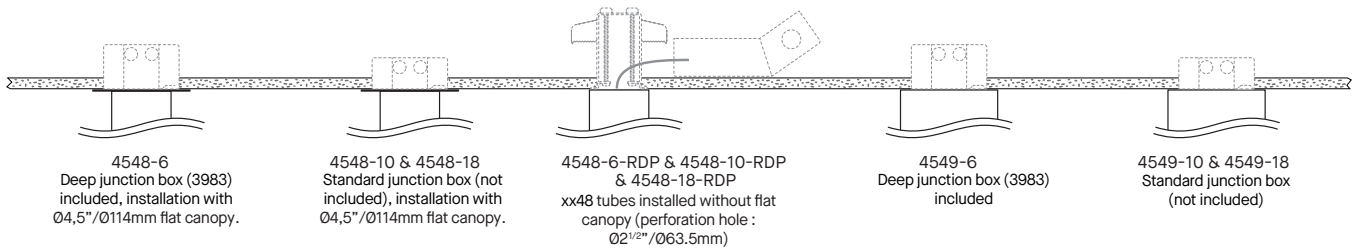

PRODUCT SPECIFICATION	XX48-NA		XX48-ME		XX49-NA		XX49-ME		XX49-WI	
	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO
PERFORMANCE										
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W
OTHER INFORMATIONS										
BEAM ANGLE	24°		45°		28°		48°		64°	
LUMINAIRE'S WEIGHT	1.19KG / 1.38KG / 1.71KG		1.19KG / 1.38KG / 1.71KG		1.62KG / 1.99KG / 2.50KG		1.62KG / 1.99KG / 2.50KG		1.62KG / 1.99KG / 2.50KG	
L70 (LUMEN MAINTENANCE)	2.61LBS/ 3.03LBS/ 3.77LBS > 63 600 HRS		2.61LBS/ 3.03LBS/ 3.77LBS > 63 600 HRS		3.57LBS/ 4.37LBS/ 5.50LBS > 63 600 HRS		3.57LBS/ 4.37LBS/ 5.50LBS > 63 600 HRS		3.57LBS/ 4.37LBS/ 5.50LBS > 63 600 HRS	

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.0
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

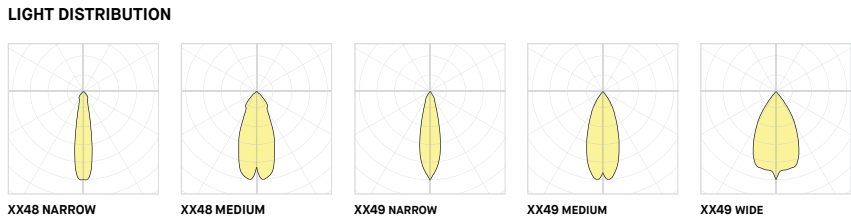





Visit our website for warranty terms and conditions.

Photometric Report

SCOUT

xx48 - LED.40 - NA - CLR

CCT (K):	4000
Beam angle	NARROW
FWHM	24°
Delivered Lumens (lm):	1051
System wattage (W)*:	9.5
Distribution:	Direct
Delivered Efficacy (lm/W):	110
Photometric type	C

Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	1.56 (39.5)
90-270 Axis:	1.56 (39.5)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.38
2 luminaires, plane 90:	0.38
4 luminaires:	0.38

*System wattage include driver and LED module consumption

xx48 - LED.40 - ME - CLR

CCT (K):	4000
Beam angle	MEDIUM
FWHM	45°
Delivered Lumens (lm):	1051
System wattage (W)*:	9.5
Distribution:	Direct
Delivered Efficacy (lm/W):	110
Photometric type	C



Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	1.56 (39.5)
90-270 Axis:	1.56 (39.5)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.80
2 luminaires, plane 90:	0.80
4 luminaires:	0.74

*System wattage include driver and LED module consumption

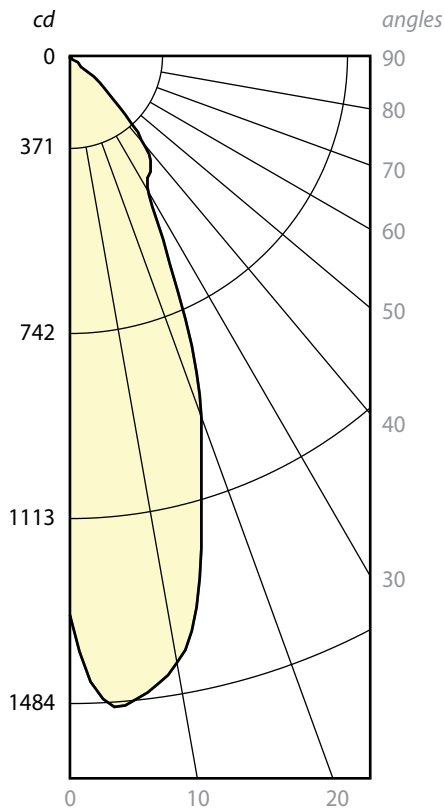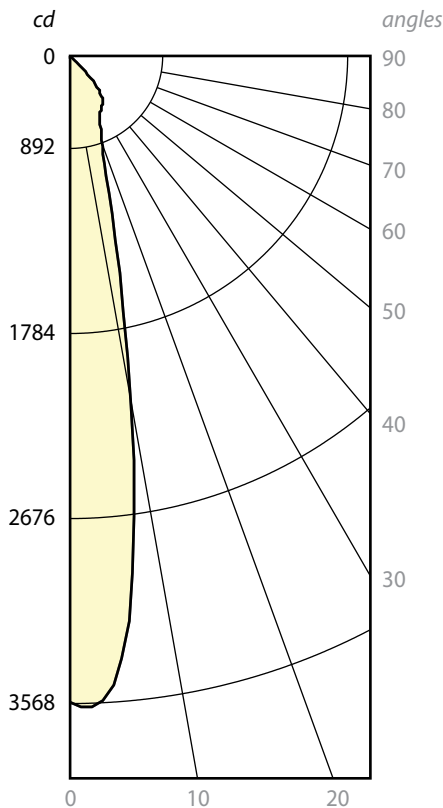

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

Photometric Report

SCOUT

xx48 - LED.HO.40 - NA - CLR

CCT (K):	4000
Beam angle	NARROW
FWHM	24°
Delivered Lumens (lm):	1425
System wattage (W)*:	13.7
Distribution:	Direct
Delivered Efficacy (lm/W):	104
Photometric type	C

Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	1.56 (39.5)
90-270 Axis:	1.56 (39.5)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.38
2 luminaires, plane 90:	0.38
4 luminaires:	0.38

*System wattage include driver and LED module consumption

xx48 - LED.HO.40 - ME - CLR

CCT (K):	4000
Beam angle	MEDIUM
FWHM	45°
Delivered Lumens (lm):	1425
System wattage (W)*:	13.7
Distribution:	Direct
Delivered Efficacy (lm/W):	104
Photometric type	C



Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	1.56 (39.5)
90-270 Axis:	1.56 (39.5)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.80
2 luminaires, plane 90:	0.80
4 luminaires:	0.74

*System wattage include driver and LED module consumption

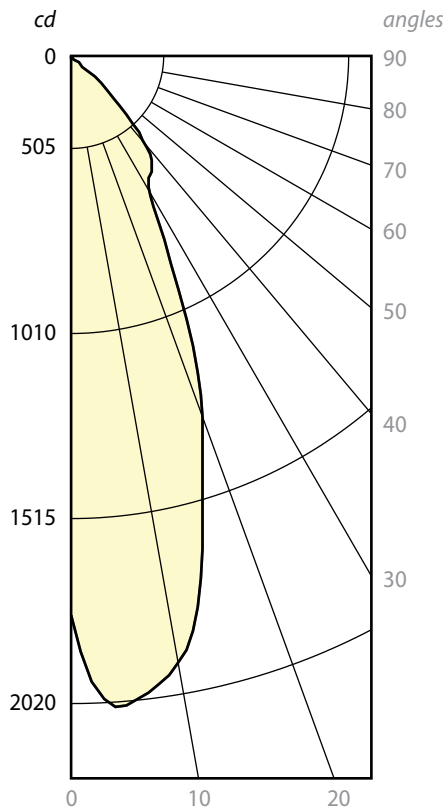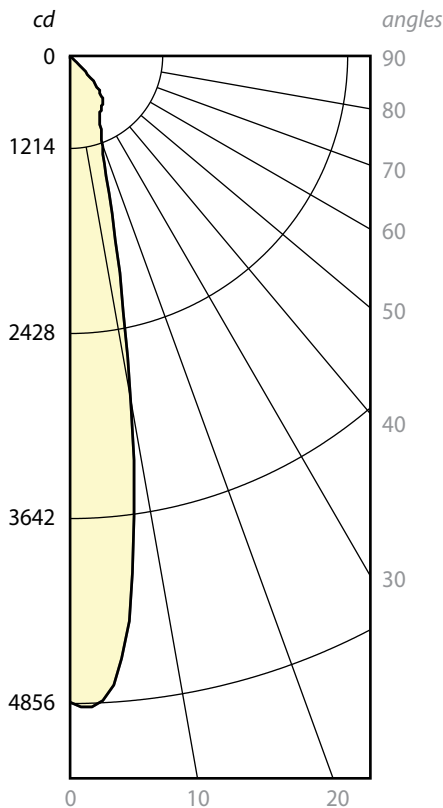

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

Photometric Report

SCOUT

xx49 - LED.40 - NA - CLR

CCT (K):	4000
Beam angle	NARROW
FWHM	28°
Delivered Lumens (lm):	1394
System wattage (W)*:	13.7
Distribution:	Direct
Delivered Efficacy (lm/W):	101
Photometric type	C

Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	2.36 (60.00)
90-270 Axis:	2.36 (60.00)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.46
2 luminaires, plane 90:	0.44
4 luminaires:	0.46

*System wattage include driver and LED module consumption

xx49 - LED.40 - ME - CLR

CCT (K):	4000
Beam angle	MEDIUM
FWHM	48°
Delivered Lumens (lm):	1509
System wattage (W)*:	13.7
Distribution:	Direct
Delivered Efficacy (lm/W):	110
Photometric type	C

Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	2.36 (60.00)
90-270 Axis:	2.36 (60.00)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.70
2 luminaires, plane 90:	0.70
4 luminaires:	0.70

*System wattage include driver and LED module consumption

xx49 - LED.40 - WI - CLR

CCT (K):	4000
Beam angle	WIDE
FWHM	64°
Delivered Lumens (lm):	1472
System wattage (W)*:	13.7
Distribution:	Direct
Delivered Efficacy (lm/W):	107
Photometric type	C




Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	2.36 (60.00)
90-270 Axis:	2.36 (60.00)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.88
2 luminaires, plane 90:	0.86
4 luminaires:	0.86

*System wattage include driver and LED module consumption

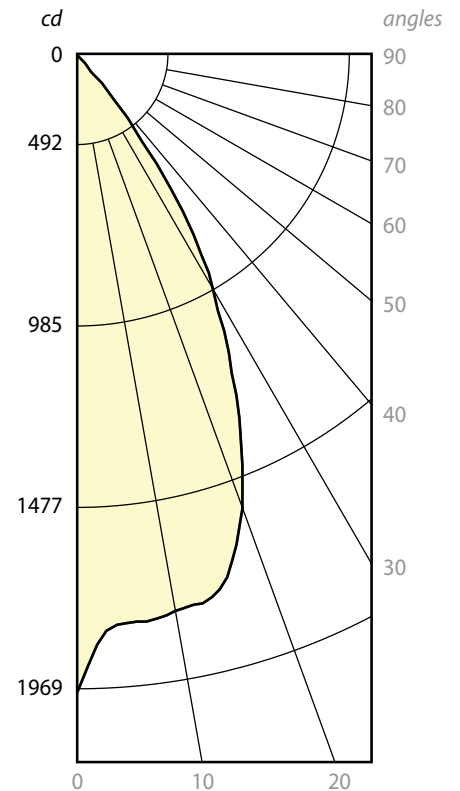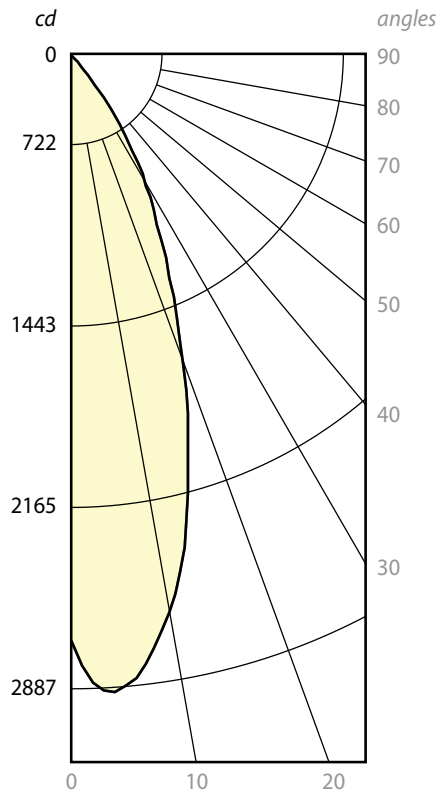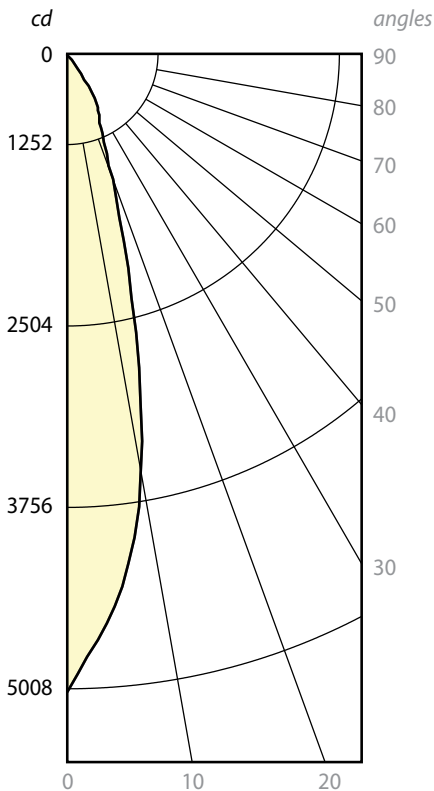

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

Photometric Report

SCOUT

xx49 - LED.HO.40 - NA - CLR

CCT (K):	4000
Beam angle	NARROW
FWHM	28°
Delivered Lumens (lm):	1907
System wattage (W)*:	20
Distribution:	Direct
Delivered Efficacy (lm/W):	95
Photometric type	C

Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	2.36 (60.00)
90-270 Axis:	2.36 (60.00)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	
2 luminaires, plane 90:	0.46
4 luminaires:	0.44
	0.46

*System wattage include driver and LED module consumption

xx49 - LED.HO.40 - ME - CLR

CCT (K):	4000
Beam angle	MEDIUM
FWHM	48°
Delivered Lumens (lm):	2070
System wattage (W)*:	20
Distribution:	Direct
Delivered Efficacy (lm/W):	104
Photometric type	C

Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	2.36 (60.00)
90-270 Axis:	2.36 (60.00)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.70
2 luminaires, plane 90:	0.70
4 luminaires:	0.70

*System wattage include driver and LED module consumption

xx49 - LED.HO.40 - WI - CLR

CCT (K):	4000
Beam angle	WIDE
FWHM	64°
Delivered Lumens (lm):	2021
System wattage (W)*:	20
Distribution:	Direct
Delivered Efficacy (lm/W):	101
Photometric type	C




Luminous dimensions

Luminous shape:	Circular
Units:	in (mm)
0-180 Axis:	2.36 (60.00)
90-270 Axis:	2.36 (60.00)
Height:	0.00 (0.0)

Luminaire spacing criteria

2 luminaires, plane 0:	0.88
2 luminaires, plane 90:	0.88
4 luminaires:	0.86

*System wattage include driver and LED module consumption

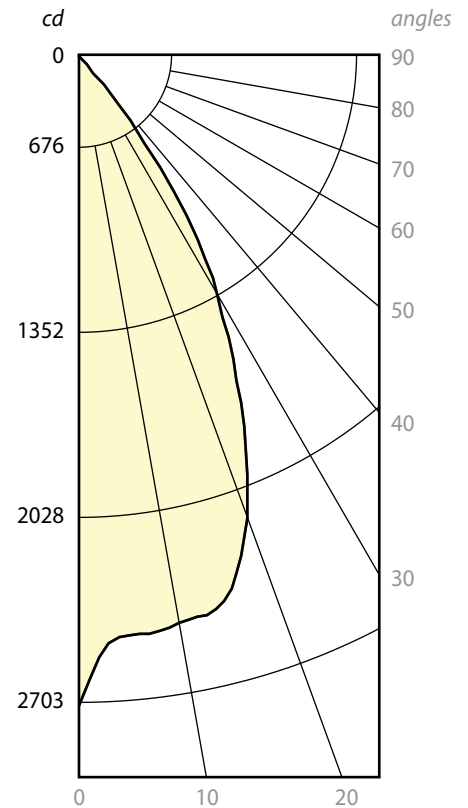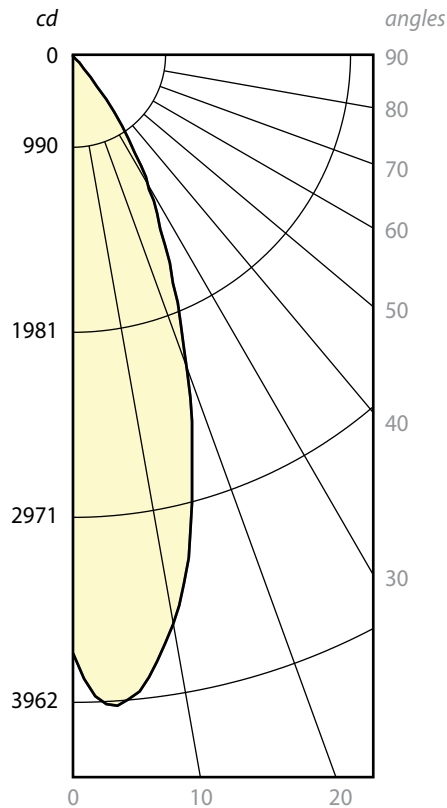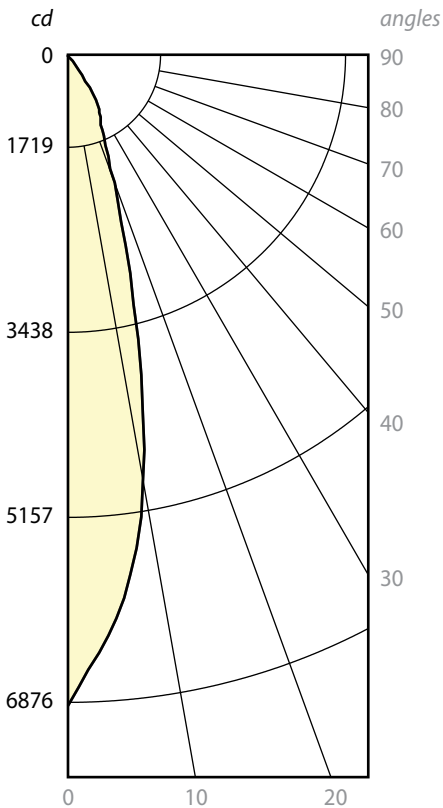

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



Scout XX48-XX49