









Robust and modern




Guiding lights





DESIGNED FOR  
CONÇU POUR **IP65**  
CONTACT EUREKA FOR MORE INFORMATION  
CONTACTEZ EUREKA POUR INFORMATION

reddot 21  
world of design

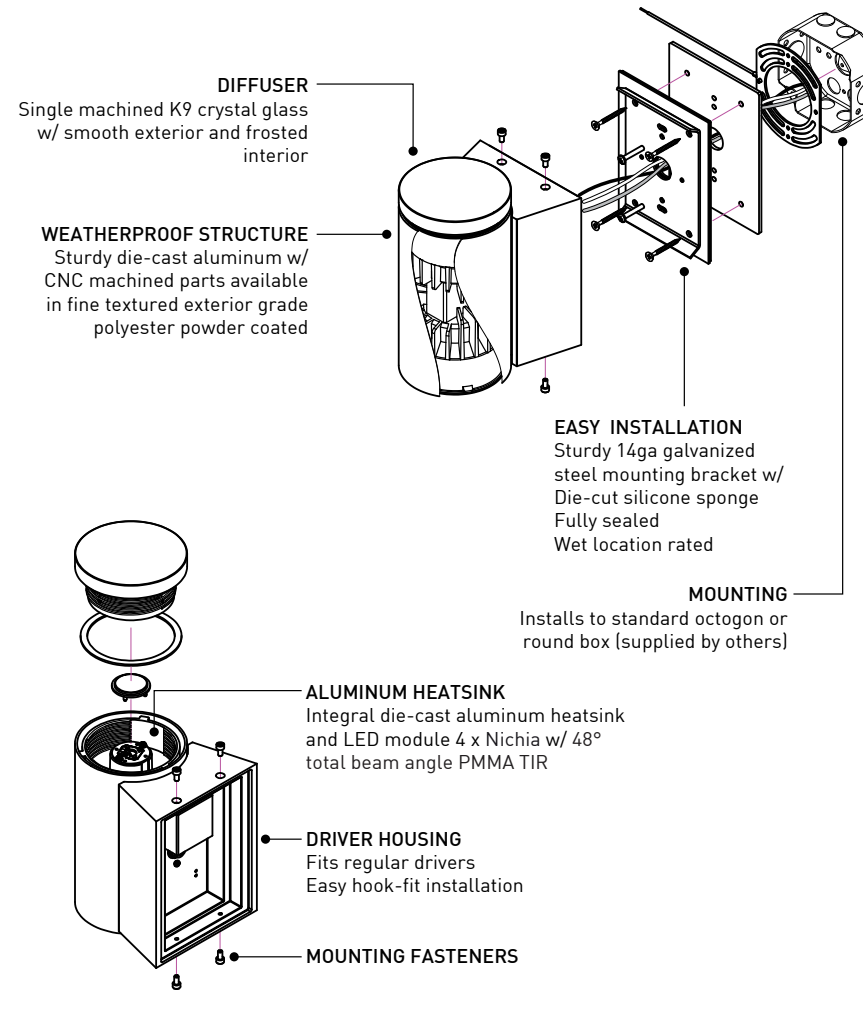


## CHARACTERISTICS 3456-KDB

LIGHT SOURCE	4 x Nichia - total ± 4w	4 x Nichia - total ± 8w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	286 lms or 306 lms (4000K)	489 lms ou 539 lms (4000K)
CRI	80 CRI (typical)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct & Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	350mA - 6W Constant Current	700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	On request / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at ¾" diffuser length for KDB option	
STRUCTURE FINISH	Fine textured grey anthracite or black exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

DESIGNED FOR  
CONÇU POUR **IP65**  
CONTACT EUREKA FOR MORE INFORMATION  
CONTACTEZ EUREKA POUR INFORMATION

reddot 21  
world of design

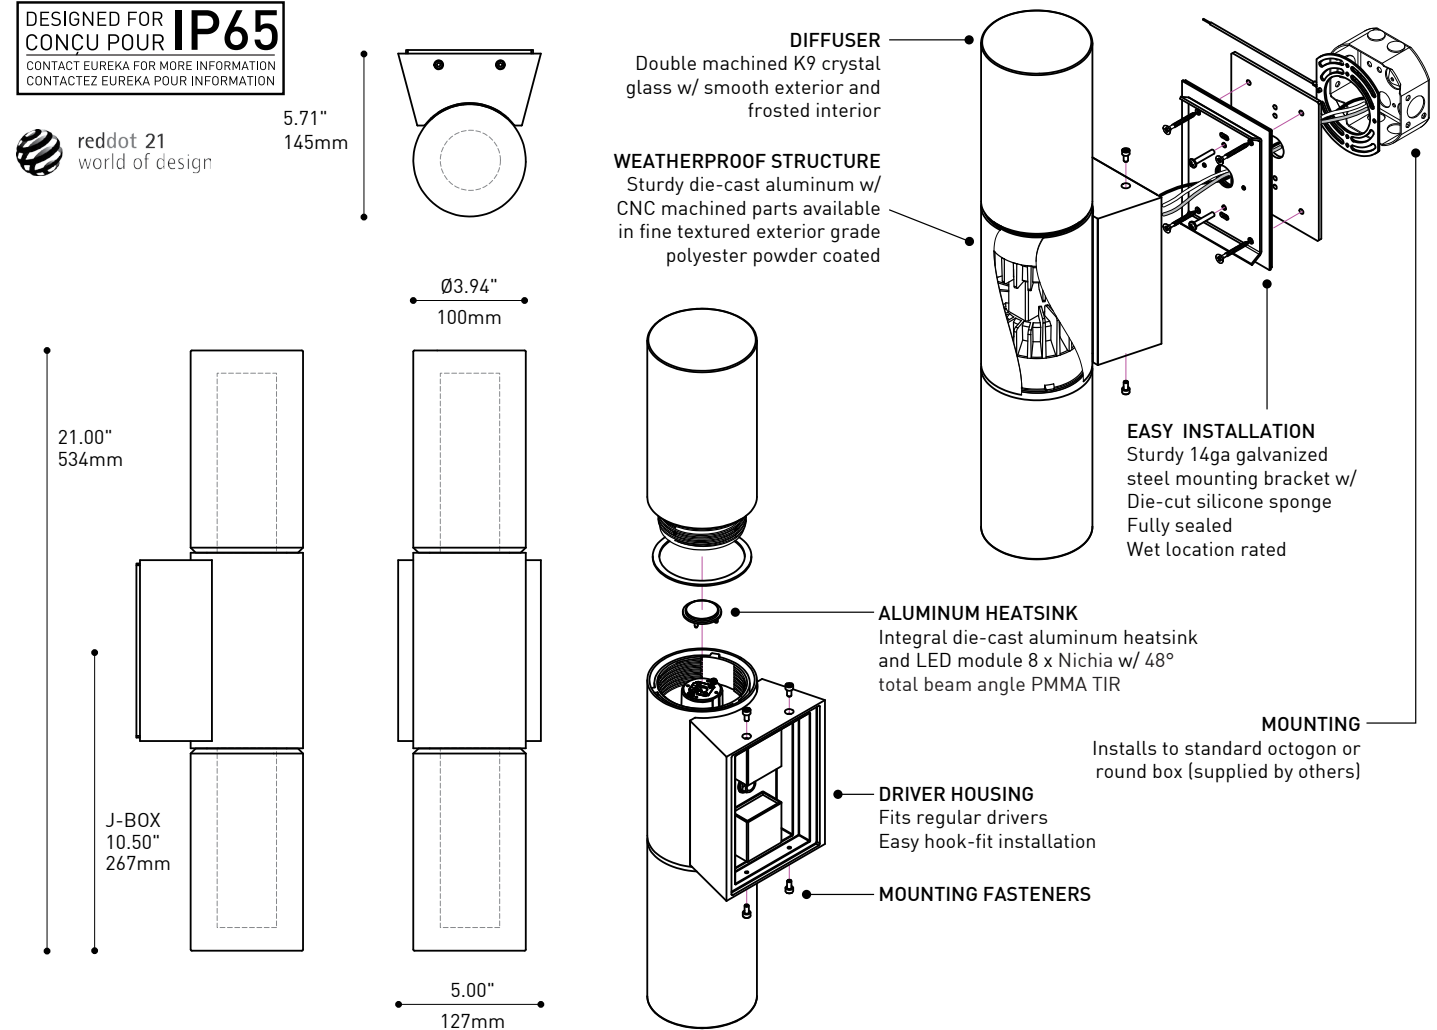


## CHARACTERISTICS 3455-KDH

LIGHT SOURCE	8 x Nichia - total ± 8w or 2 x 4w	8 x Nichia - total ± 16w or 2 x 8w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	649 lms or 689 lms (4000K)	1110 lms ou 1210 lms (4000K)
CRI	80 CRI (typical)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct & Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	2 x 350mA - 6W Constant Current	2 x 700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	On request / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at 7" diffuser length for KDH option	
STRUCTURE FINISH	Fine textured grey anthracite or black exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	



DESIGNED FOR  
CONÇU POUR **IP65**  
CONTACT EUREKA FOR MORE INFORMATION  
CONTACTEZ EUREKA POUR INFORMATION

reddot 21  
world of design

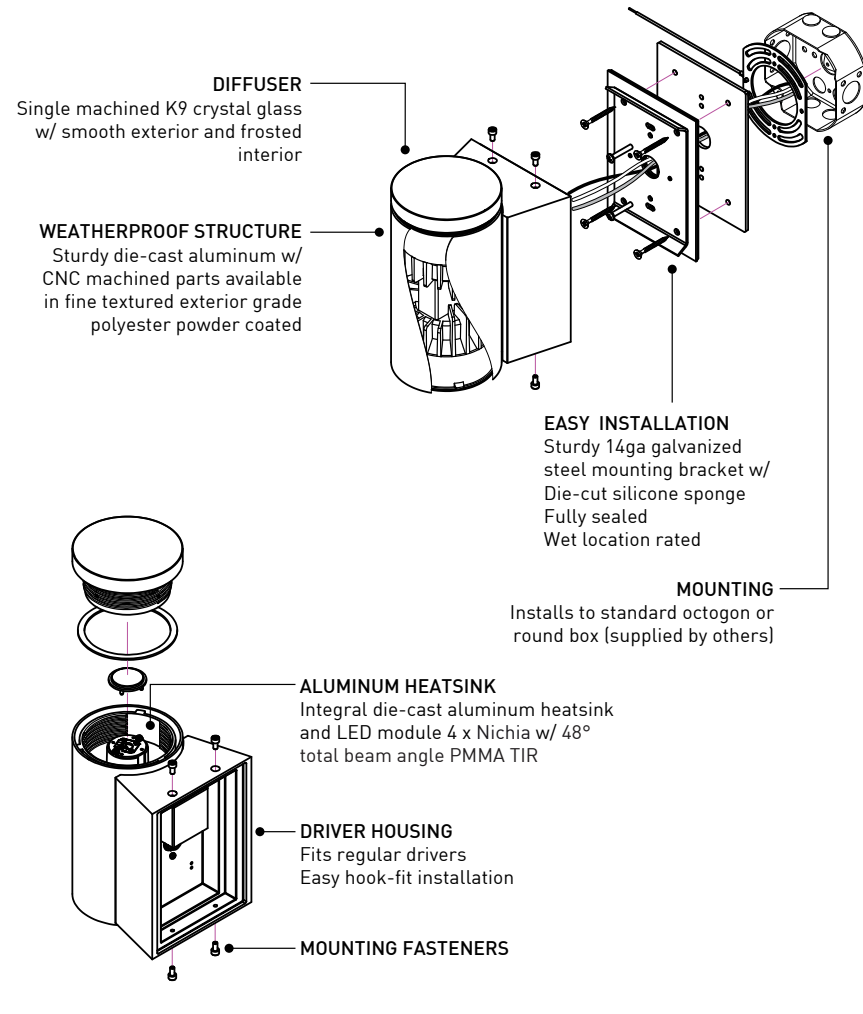


## CHARACTERISTICS 3456-KDB

LIGHT SOURCE	4 x Nichia - total ± 4w	4 x Nichia - total ± 8w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	286 lms or 306 lms (4000K)	489 lms ou 539 lms (4000K)
CRI	80 CRI (typical)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct & Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	350mA - 6W Constant Current	700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	On request / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at ¾" diffuser length for KDB option	
STRUCTURE FINISH	Fine textured grey anthracite or black exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

DESIGNED FOR  
CONÇU POUR **IP65**  
CONTACT EUREKA FOR MORE INFORMATION  
CONTACTEZ EUREKA POUR INFORMATION

reddot 21  
world of design

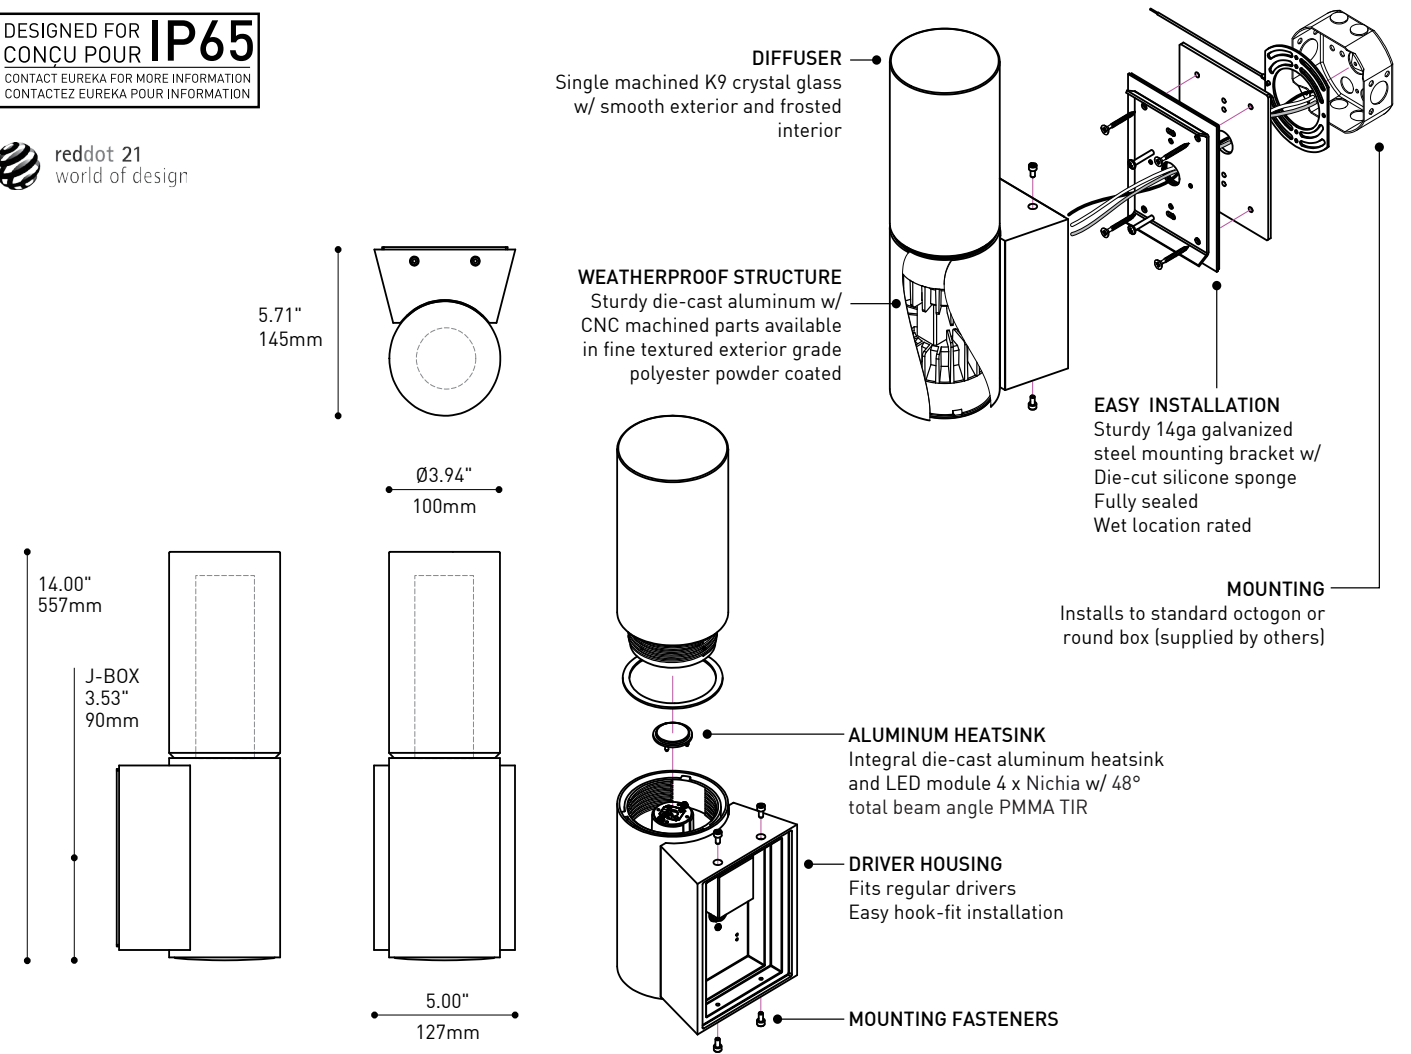

## CHARACTERISTICS 3456-KDH

LIGHT SOURCE	4 x Nichia - total ± 4w	4 x Nichia - total ± 8w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	325 lms or 345 lms (4000K)	345 lms ou 608 lms (4000K)
CRI	80 CRI (typical)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct or Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	350mA - 6W Constant Current	700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	On request / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at 7" diffuser length for KDH option	
STRUCTURE FINISH	Fine textured anthracite or black exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

