





DELTA 3215 / 3215B

PROJECT PROJET
SPEC TYPE
NOTES



FAMILY FAMILLE




4234-VDP/VDPA

4234-VDX/VDXA



4427-VDP/VDPA

4427-VDX/VDXA

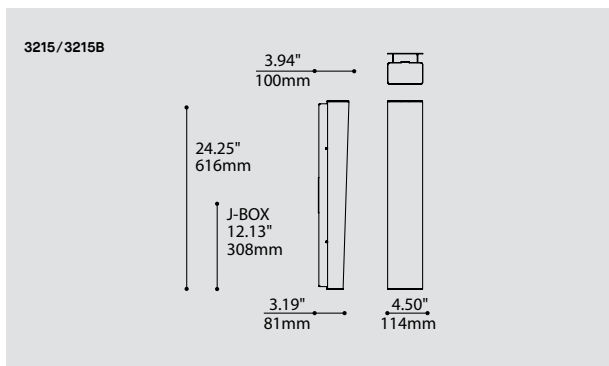

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
3215	DELTA (GLASS)	
3215B	DELTA (ACRYLIC)	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
HOUSING & END CAPS FINISH FINI BOITIER & EMBOUTS		CHR
CHR	CHROME	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3980	MINI JUNCTION BOX	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Subtle and highly modern design that features a tapering rectilinear form. ADA compliant.
LIGHT SOURCE:	LED light sources. Dimming available.
HOUSING & END CAPS:	Die-stamped steel structure with plated finish. Steel chrome plated end cap.
DIFFUSER:	Hand blown white triplex glass (3215) or acrylic (3215B).
CERTIFIED:	c-CSA-us
CONCEPTION:	Contemporaine et subtile, la forme est rectilignement effilée. Conforme à la norme ADA.
SOURCE LUMINEUSE:	DEL avec gradation disponible.
BOITIER & EMBOUTS:	Acier embouti plaqué. Embout en acier chromé.
DIFFUSEUR:	Verre triplex blanc soufflé à la main (3215) ou acrylique (3215B).
CERTIFIÉ:	c-CSA-us



Anatomy

ADA

BIM

DIM

LED

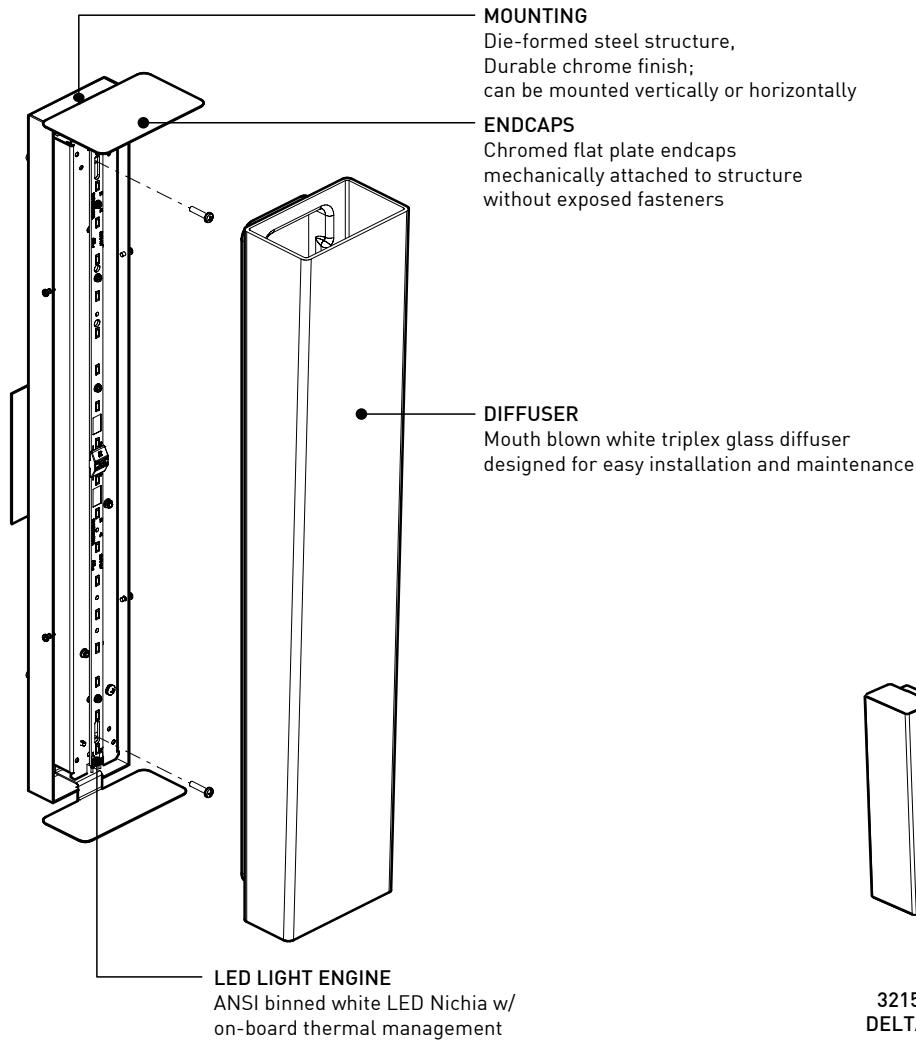

3215
DELTA



3216
FOLIA



3217
SENET

SPECIFICATIONS

LIGHT SOURCE

MODULE

LUMENS (DELIVERED)

SYSTEM WATTAGE

CCT / CRI

ROHS

THERMAL MANAGEMENT

LIGHT DISTRIBUTION

VOLTAGE

DIMMING

LM-79 / L70

HOUSING

DIFFUSER

MOUNTING

ENDCAPS

WARRANTY

LED-REG

LED-HO

18 x NICHIA LEDS

UL recognized - made in USA

690 lm

1002 lm

9W

13.5W

80 CRI (typical)

Compliant

Light Engine w/ on-board Thermal Management

Direct - 120° Beam Angle

120 or 277V

Phase (DP) or 0-10V (DV) Dimming

On request / Estimated 50 000 hrs

Formed Cold Rolled steel finished in white polyester powder coat (0.036" nominal thickness)

Mouth blown white triplex glass

Formed Cold Rolled Steel (0.060" nominal thickness) w/ Chrome Plated Finish

Precision laser cutting and Formed Cold rolled Steel (0.048" nominal thickness) w/ Chrome Plated Finish

5 years



DELTA 4234-VDP / VDPA

PROJECT PROJET

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	INC	LED
MOUNTING	2734B	2734F	2431E	2431G
CABLE	75.90"	77.30"	74.80"	75.55"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2734F	2431E	2431G
1.46" x 1.36" 37 x 35mm	7.25" x 1.70" 37 x 35mm	5.00" x 5.00" x 1.00" 127x127x25mm	5.25" x 5.25" x 1.75" 133x133x44mm


* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE
STD 60"
1523mm



4234-VDP / 4234-VDPA



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE




CODE

MODEL MODÈLE

4234-VDP DELTA (GLASS)
4234-VDPA DELTA (ACRYLIC)

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

INC.100  100W, INC, B10 / HAL T10, MEDIUM BASE (120V ONLY)
LED  REGULAR OUTPUT
LED.HO  HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30 3000K
35 3500K
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
277V* 277 VOLT
*NOT AVAILABLE WITH A TRACK ADAPTOR

DIMMING OPTION OPTION DE GRADATION

FOR LED ONLY

DV* 0-10V DIMMING (120-277V)
DP PHASE DIMMING (120V ONLY)
*NOT AVAILABLE WITH A TRACK ADAPTOR

CABLE CABLE


AC

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE


CABLE LENGTH LONGUEUR CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

SQC  SQUARE CANOPY / PAVILLON CARRÉ
FOR INC: 1.00" CANOPY (2431E)
FOR LED: 1.75" CANOPY (2431G)

TRACK ADAPTOR / ADAPTATEUR DE RAIL
1 CIRCUIT

TA1  INC 120V ADAPTOR (2734B)
LED NON-DIMMING 120V ADAPTOR (2734F)

TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL^(A)

WH WHITE
BLK BLACK
M G METALLIC GRAY
^(A)FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE

WH

WH WHITE

DIFFUSER FINISH FINI DIFFUSEUR

WH

WH WHITE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED** **REM**

DESIGN: Subtle and highly modern design that features a tapering rectilinear form.
LIGHT SOURCE: LED and other light sources available.
DIFFUSER: Hand blown white triplex glass or acrylic available in two lengths.
CERTIFIED: c-CSA-us



Anatomy

BIM

DIM

LED


4234-VDP/VDPA
DELTA



15.00"
381mm

4.75"
121mm

4.00"
102mm

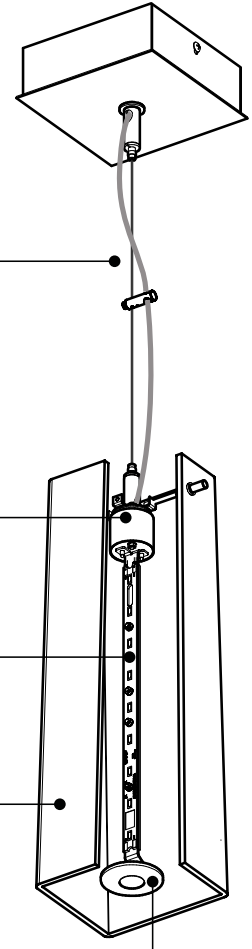

MOUNTING CABLE

Field adjustable aircraft cable with clear power cord

INTERNAL STRUCTURE

Die-formed cold rolled steel vertical support coated with high reflectance white powder coat finish

LED LIGHT ENGINE

ANSI binned white LED (Nichia) w/ on-board thermal management, mounted back to back on internal structure

SHADE ASSEMBLY

Hand blown white triplex glass diffuser or translucent white acrylic diffuser, mounted on 2-way threaded rods and knobs designed for easy installation

ANTI-GLARE DIFFUSER

Precision laser cut white acrylic disk mechanically attached to a chromed decorative center knob

SPECIFICATIONS

LED-REG

LED-HO

INCANDESCENT

LIGHT SOURCE

24 x NICHIA LEDS

1 x 100w B10

MODULE

UL recognized - made in USA

LUMENS (DELIVERED)

861 lm

1233 lm

SYSTEM WATTAGE

10.1W

14.5W

CCT / CRI

80 CRI (typical)

ROHS

Compliant

THERMAL MANAGEMENT

Light Engine w/ on-board Thermal Management

LIGHT DISTRIBUTION

General diffused - 120° Beam Angle

General diffused

VOLTAGE

120 or 277V

120V only

DIMMING

0-10V Dimming

N/A

LM-79 / L70

On request / Estimated 50 000 hrs

STRUCTURE

Formed Cold Rolled steel finished in white polyester powder coat (0.060" nominal thickness)

SHADE

Hand blown white triplex glass or translucent white acrylic w/ 2-way side mounting points

MOUNTING

Square ceiling canopy and exposed powerfeeds finished in chrome

DIFFUSER

Precision laser cutting white acrylic disk (3mm nominal thickness) combined w/ chromed decorative knob

WARRANTY

5 years

1 year



DELTA 4234-VDX / VDXA

PROJECT PROJET

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	INC	LED
MOUNTING	2734B	2734F	2431E	2431G
CABLE	82.15"	83.55"	81.80"	82.55"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2734F	2431E	2431G
1.46" x 1.36" 37 x 35mm	7.25" x 1.70" 37 x 35mm	5.00" x 5.00" x 1.00" 127x127x25mm	5.25" x 5.25" x 1.75" 133x133x44mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE STD 60" 1523mm	
-------------------------------	--

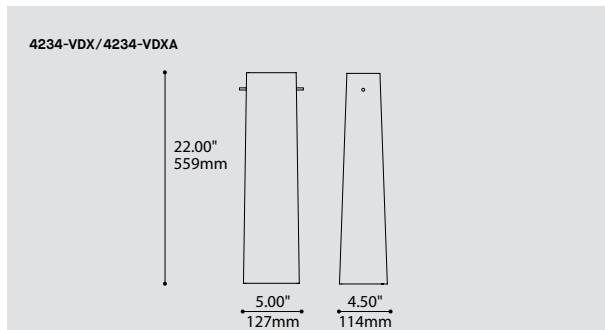

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4234-VDX DELTA (GLASS)
4234-VDXA DELTA (ACRYLIC)

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)
INC.100 100W, INC, B10 / HAL T10, MEDIUM BASE (120V ONLY)
LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY
30 3000K
35 3500K
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
277V* 277 VOLT
*NOT AVAILABLE WITH A TRACK ADAPTOR

DIMMING OPTION OPTION DE GRADATION

FOR LED ONLY
DV* 0-10V DIMMING (120-277V)
DP PHASE DIMMING (120V ONLY)
*NOT AVAILABLE WITH A TRACK ADAPTOR

CABLE CABLE

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE **AC**

CABLE LENGTH LONGUEUR CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

SQC SQUARE CANOPY / PAVILLON CARRÉ
FOR INC: 1.00" CANOPY (2431E)
FOR LED: 1.75" CANOPY (2431G)
TA1 TRACK ADAPTOR / ADAPTATEUR DE RAIL
1 CIRCUIT
INC 120V ADAPTOR (2734B)
LED NON-DIMMING 120V ADAPTOR (2734F)

TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL^(A)

WH WHITE
BLK BLACK
M G METALLIC GRAY
^(A)FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE

WH WHITE **WH**

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE **WH**

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED** **REM**

DESIGN: Subtle and highly modern design that features a tapering rectilinear form.
LIGHT SOURCE: LED and other light sources available.
DIFFUSER: Hand blown white triplex glass or acrylic available in two lengths.
CERTIFIED: c-CSA-us


Anatomy

BIM


DIM

LED

4234-VDX/VDXA
DELTA

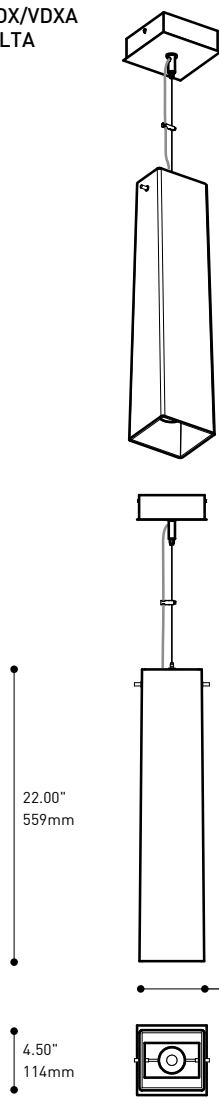

- MOUNTING CABLE**
Field adjustable aircraft cable with clear power cord
- INTERNAL STRUCTURE**
Die-formed cold rolled steel vertical support coated with high reflectance white powder coat finish
- LED LIGHT ENGINE**
ANSI binned white LED (Nichia) w/ on-board thermal management, mounted back to back on internal structure
- SHADE ASSEMBLY**
Hand blown white triplex glass diffuser or translucent white acrylic diffuser, mounted on 2-way threaded rods and knobs, designed for easy installation
- ANTI-GLARE DIFFUSER**
Precision laser cut white acrylic disk mechanically attached to a chromed decorative center knob

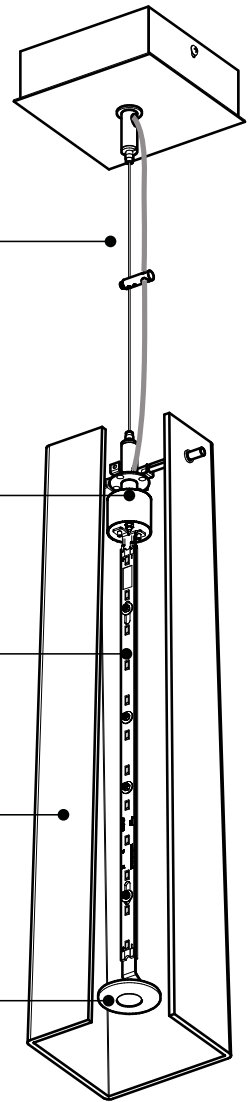

SPECIFICATIONS	LED-REG	LED-HO	INCANDESCENT
LIGHT SOURCE	30 x NICHIA LEDS		1 x 100w B10
MODULE	UL recognized - made in USA		
LUMENS (DELIVERED)	1134 lm	1629 lm	
SYSTEME WATTAGE	12.6W	18.1W	
CCT / CRI	80 CRI (typical)		
ROHS	Compliant		
THERMAL MANAGEMENT	Light Engine w/ on-board Thermal Management		
LIGHT DISTRIBUTION	General diffused - 120° Beam Angle		General diffused
VOLTAGE	120V or 277V		120V only
DIMMING	0-10V Dimming		N/A
LM-79 / L70	On request / Estimated 50 000 hrs		
STRUCTURE	Formed Cold Rolled steel finished in white polyester powder coat (0.060" nominal thickness)		
SHADE	Hand blown white triplex glass or Translucent white acrylic w/ 2-way side mounting points		
MOUNTING	Square ceiling canopy and exposed powerfeeds finished in chrome		
DIFFUSER	Precision laser cutting white acrylic disk (3mm nominal thickness) combined w/ chromed decorative knob		
WARRANTY	5 years		1 year

