



Valco 4259

 EUREKA





Refined minimalism



VALCO 4259

PROJECTPROJET

SPEC TYPE

NOTES



FINISHFINI



ANTE




WHE

FAMILYFAMILLE



4259

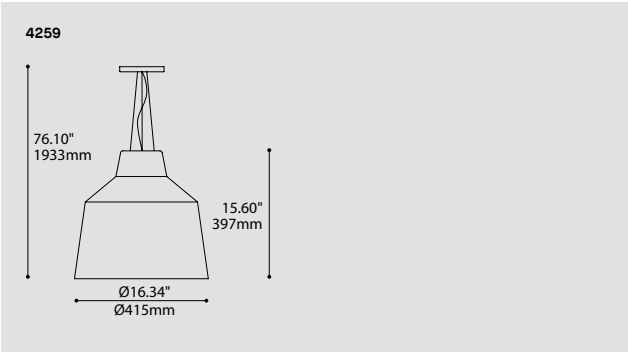

QUICKSHIP → CLICK HERE / CLIQUEZ ICI		
ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODELMODÈLE	4259	4259
LIGHT SOURCESOURCE LUMINEUSE	LED.24	LED.24
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTIONOPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
EMERGENCY BATTERYBATTERIE D'URGENCE		
AVAILABLE WITH LED SOURCES 120-227V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS. WITH DV DIMMING OPTION, AN ADDITIONAL POWER CABLE WILL DROP FROM CEILING NEXT TO MAIN CABLE.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
CABLECÂBLE		AC
AC	AIR-CRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTHLONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
CANOPY FINISHFINI PAVILLON		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
SHADE FINISHFINI ABAT-JOUR		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
ACCESSORYACCESSOIRE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

DESIGN:	The minimalist silhouette distinguishes itself by its unique lines which gives it a contemporary tone. Suspended alone or in a group, Valco creates a soft and comfortable illumination throughout the room.
INSTALLATION:	Easy to install, adjust and level triple aircraft cable mounting.
LIGHT SOURCE:	24W custom LED light engine supplied with a standard dimming driver (0-10V or phase).
CANOPY:	Die-formed steel canopy with a machined aluminum diffuser support.
SHADE:	Custom spun aluminum shade anthracite or white architectural grade fine texture finishes.
CERTIFIED:	c-CSA-us
CONCEPTION:	Ce luminaire à la silhouette épurée se distingue par ses arrêtes prononcées qui lui donnent un ton actuel. Suspendu seul ou en groupe, il crée une douce illumination à travers la pièce. Câbles de retenue en acier facilitant l'installation, l'ajustement et la mise à niveau.
INSTALLATION:	Module lumineux DEL de 24W fait sur mesure et unité d'alimentation à intensité variable standard (0-10V ou phase).
PAVILLON:	Structure d'acier et support à diffuseur usiné en aluminium.
ABAT-JOUR:	Abat-jour en métal repoussé avec une peinture anthracite ou blanche finement texturée de grade architectural.
CERTIFIÉ:	c-CSA-us

VALCO 4259

QUICKSHIP →

PROJECTPROJET

SPEC TYPE

NOTES




FINISHFINI



ANTE



WHE

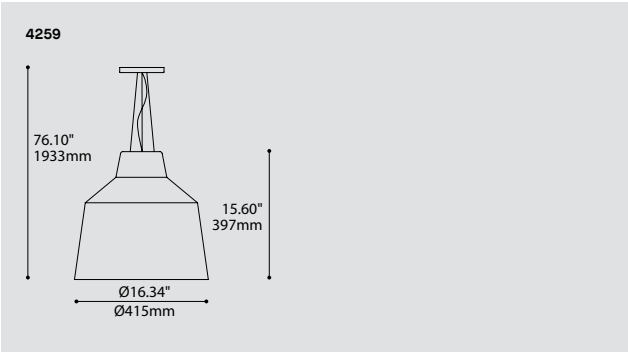

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		4259
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODELMODÈLE	4259	4259
LIGHT SOURCESOURCE LUMINEUSE	LED.24	LED.24
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTIONOPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
CABLECÂBLE		AC
AC	AIR-CRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTHLONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
CANOPY FINISHFINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
SHADE FINISHFINI ABAT-JOUR		
WHE	WHITE FINE TEXTURE	
ANTE	ANTHRACITE FINE TEXTURE	
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT


- BIM
- DIM
- EMB
- IES
- LED

DESIGN:	The minimalist silhouette distinguishes itself by its unique lines which gives it a contemporary tone. Suspended alone or in a group, Valco creates a soft and comfortable illumination throughout the room.
INSTALLATION:	Easy to install, adjust and level triple aircraft cable mounting.
LIGHT SOURCE:	24W custom LED light engine supplied with a standard dimming driver (0-10V or phase).
CANOPY:	Die-formed steel canopy with a machined aluminum diffuser support.
SHADE:	Custom spun aluminum shade anthracite or white architectural grade fine texture finishes.
CERTIFIED:	c-CSA-us
CONCEPTION:	Ce luminaire à la silhouette épurée se distingue par ses arrêtes prononcées qui lui donnent un ton actuel. Suspendu seul ou en groupe, il crée une douce illumination à travers la pièce. Câbles de retenue en acier facilitant l'installation, l'ajustement et la mise à niveau.
INSTALLATION:	Module lumineux DEL de 24W fait sur mesure et unité d'alimentation à intensité variable standard (0-10V ou phase).
PAVILLON:	Structure d'acier et support à diffuseur usiné en aluminium.
ABAT-JOUR:	Abat-jour en métal repoussé avec une peinture anthracite ou blanche finement texturée de grade architectural.
CERTIFIÉ:	c-CSA-us

Discreet detail

Design shape that dissimulate the suspension elements.

TECHNICAL DATA

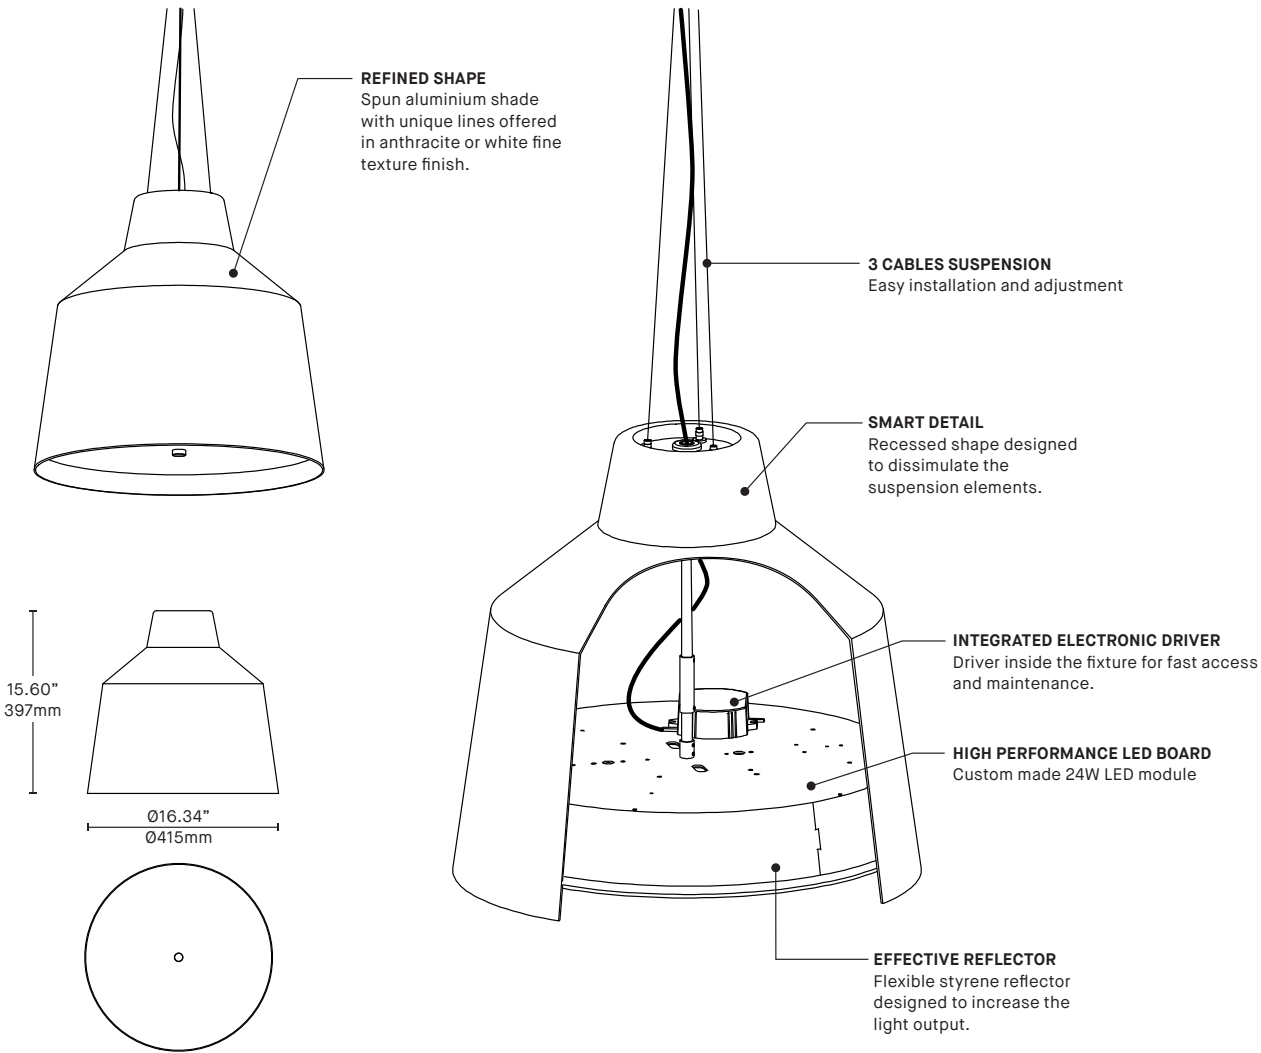

PRODUCT SPECIFICATION 4259

PERFORMANCE

SYSTEM WATTAGE	30.7W
DELIVERED LUMENS (4000K)	2820LM
EFFICACY	91.9LM/W

OTHER INFORMATION

LUMINAIRE'S WEIGHT	8,50 LBS / 3,85KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS


WELL & LEED STANDARD REQUIREMENTS

MAX. LUMINANCE 45°-90° OF NADIR	2644 CD/M²
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION



4259



Visit our website for warranty terms and conditions.

Photometric Report

4259-ANTE-LED.24.40

CCT (K):	4000
Delivered Lumens (lm):	2421
Lumens per foot (lm)	xx
System wattage (W)*:	30.7
Distribution:	Direct
Delivered Efficacy (lm/W):	78.9
Photometric type	C


Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	1.4 (35.56)
90-270 Axis:	1.4 (35.56)
Height:	1.3 (33.02)

Luminaire spacing criteria

2 luminaires, plane 0:	1.10
2 luminaires, plane 90:	1.11
4 luminaires:	1.20

*System wattage include driver and LED module consumption

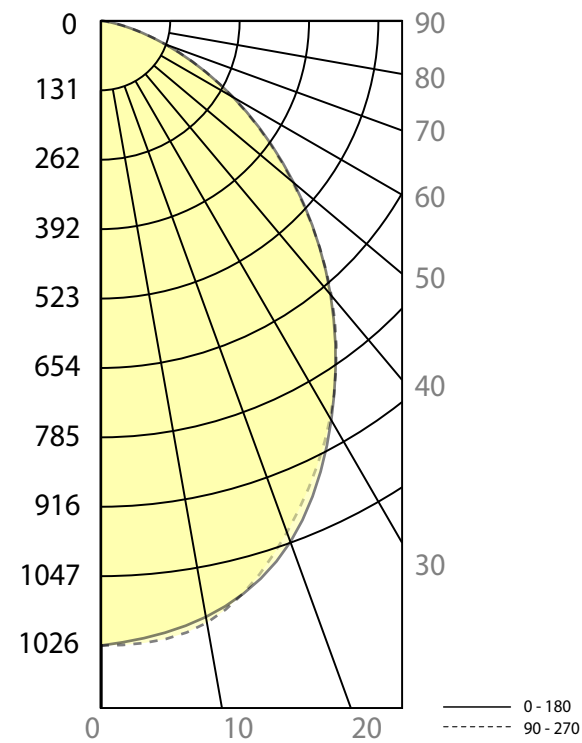

4259-WHE-LED.24.40

CCT (K):	4000
Delivered Lumens (lm):	2820
Lumens per foot (lm)	xx
System wattage (W)*:	30.7
Distribution:	Direct
Delivered Efficacy (lm/W):	91.9
Photometric type	C

Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	1.4 (35.56)
90-270 Axis:	1.4 (35.56)
Height:	1.3 (33.02)

Luminaire spacing criteria

2 luminaires, plane 0:	1.13
2 luminaires, plane 90:	1.13
4 luminaires:	1.22

*System wattage include driver and LED module consumption

