








PUNCTUATE SPACE.

The familiar meets the fresh and new in Berri. Classic ball and seamless tube components come configured in various geometries and sizes. Luminaires can be arranged to create distinctive lighting designs. Berri brings life and enhances any space, from small to large, from classic to contemporary.


BERRI ANGULAR




BERRI HEXAGONAL

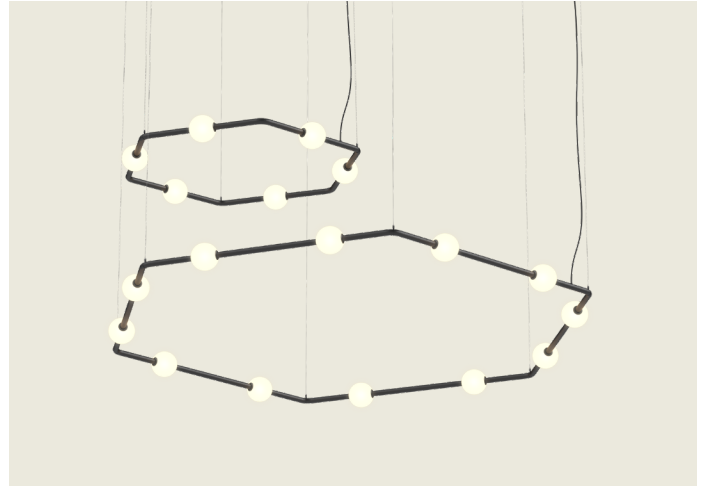


BERRI HORIZONTAL

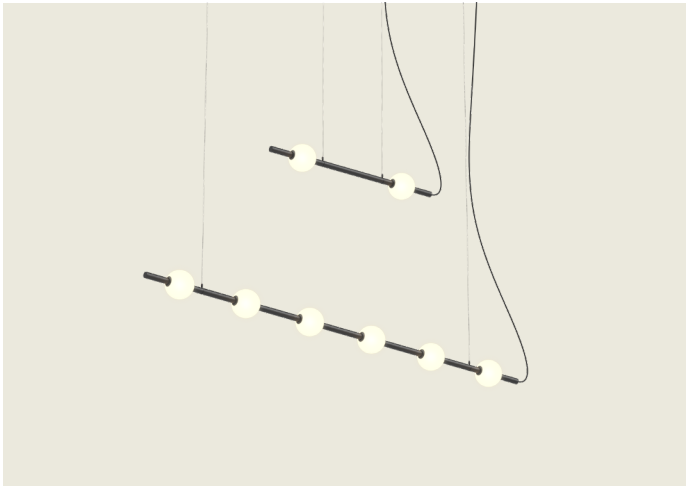


BERRI SQUARE & RECTANGULAR

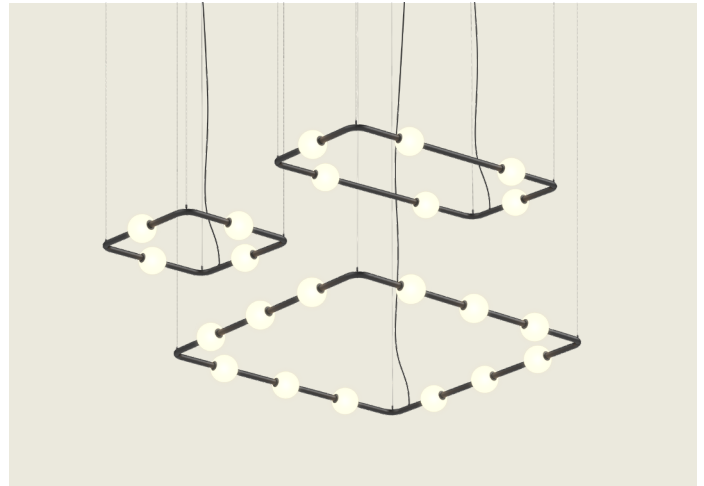


BERRI VERTICAL

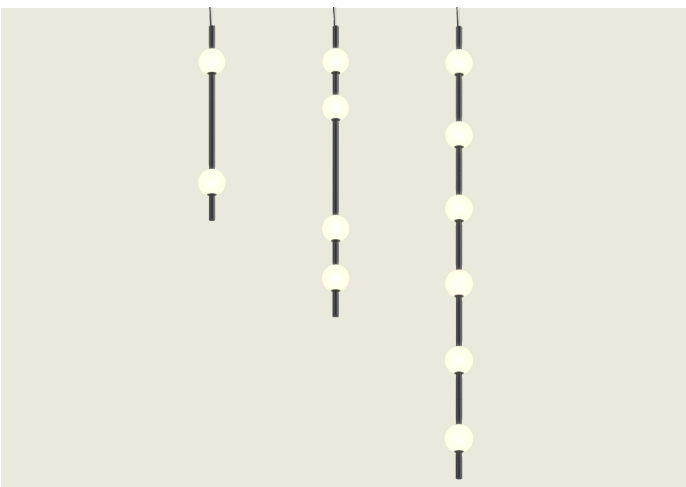

BERRI 3D

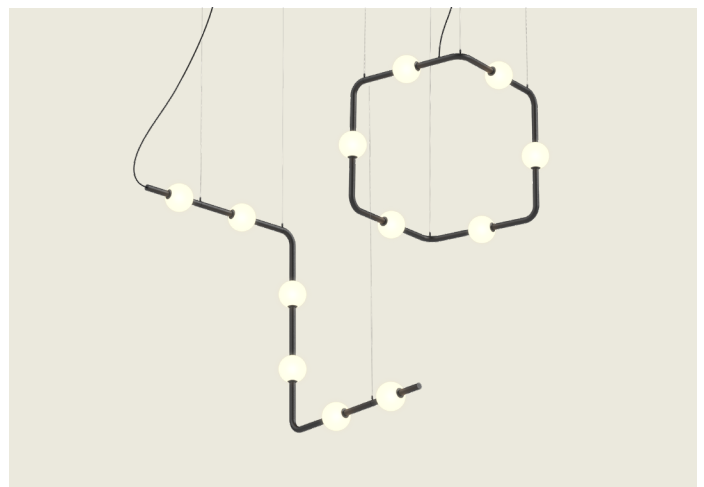

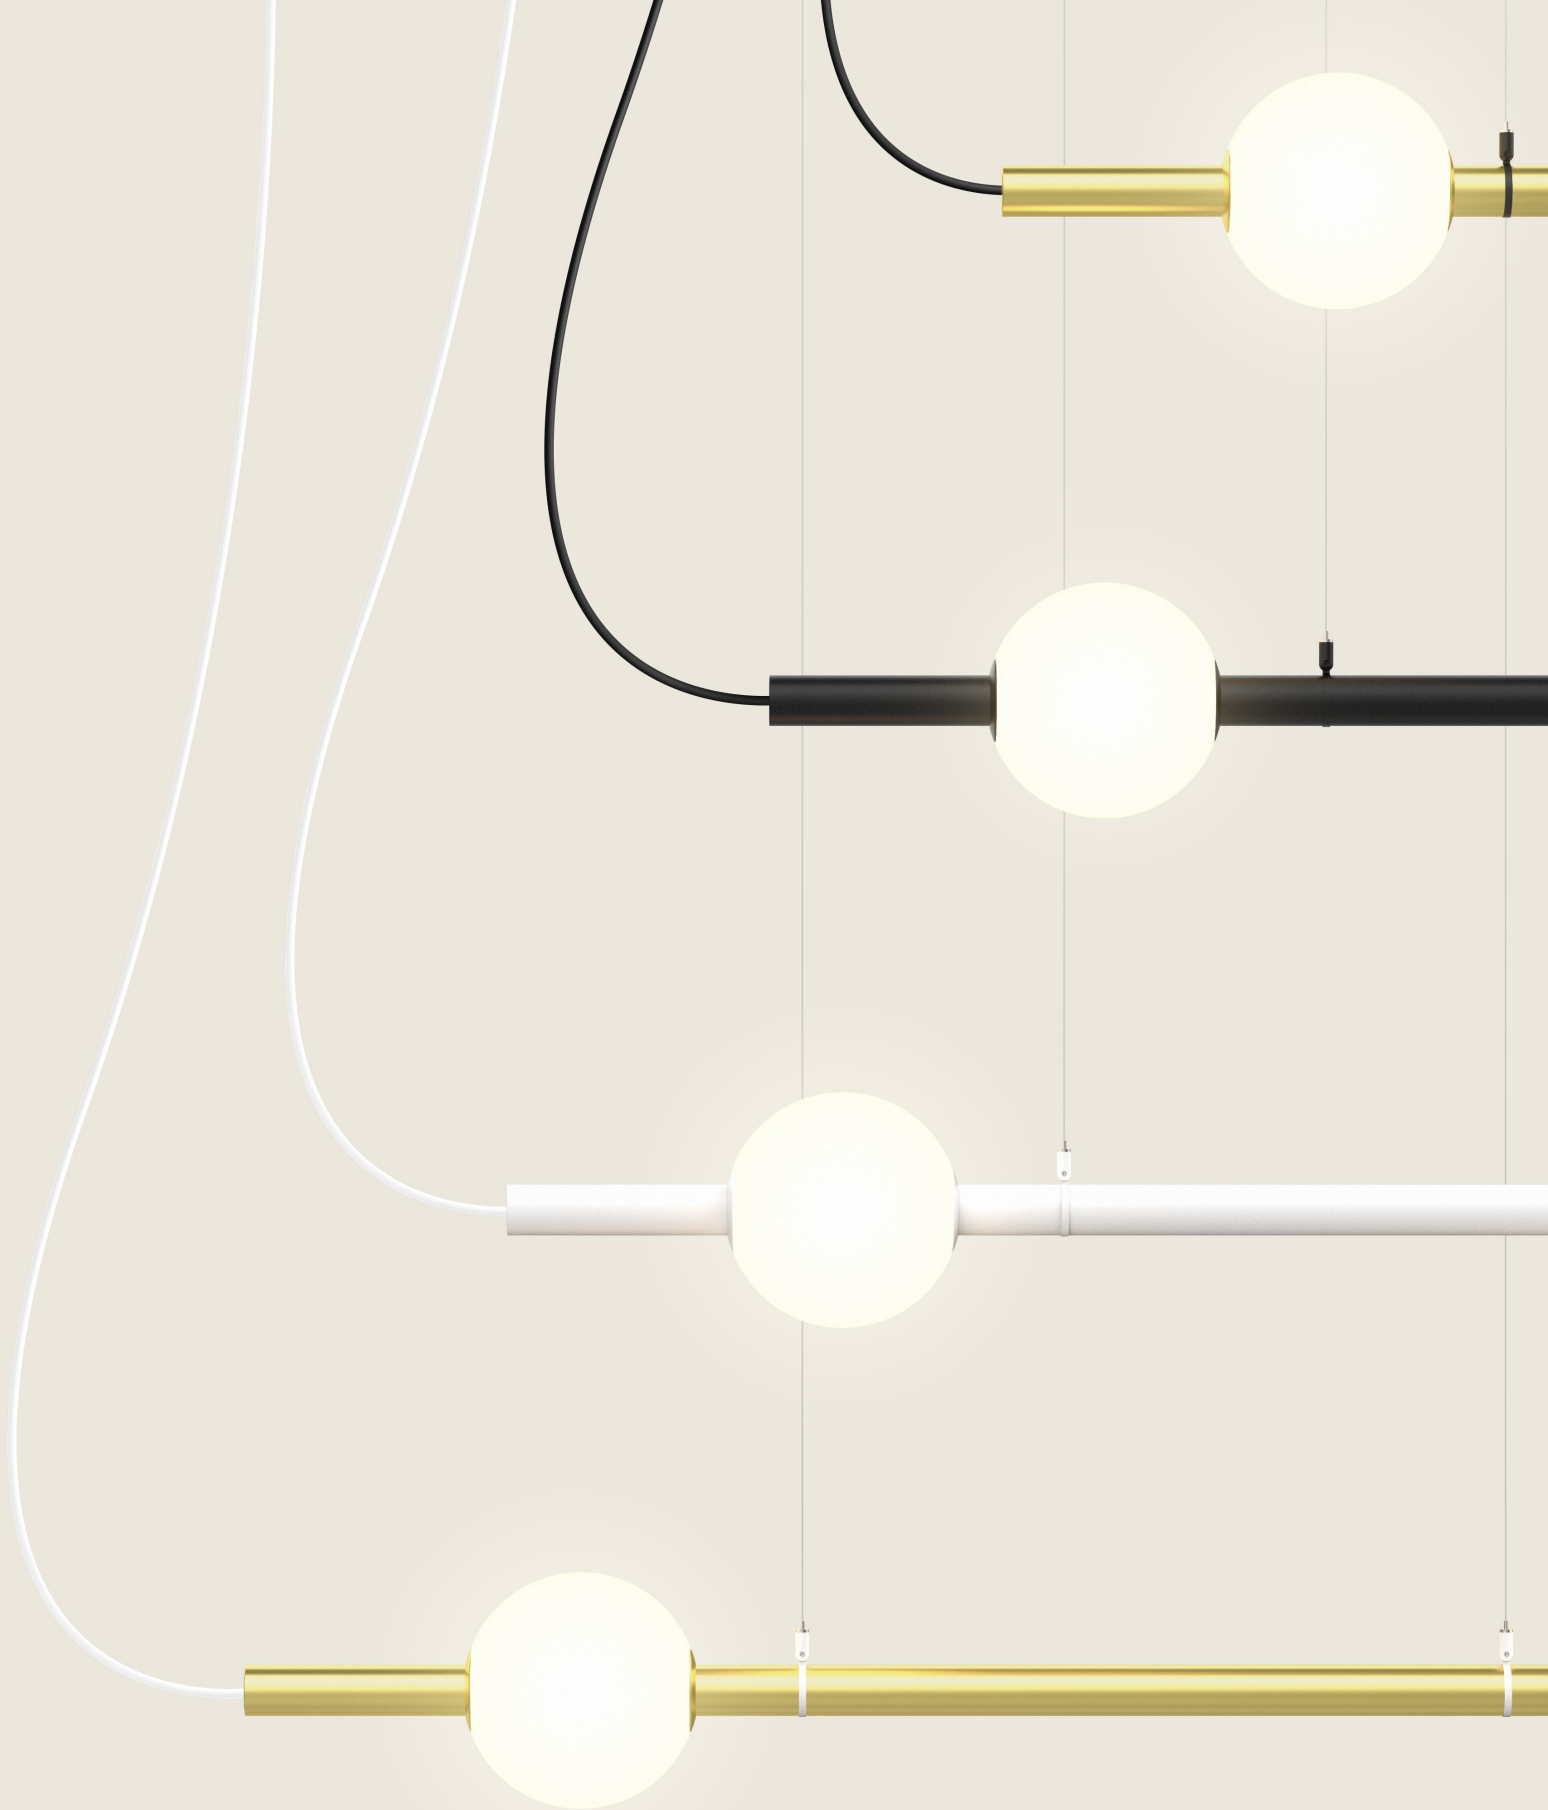


Berri is offered in three standard finishes: black, white and soft gold. The black and white are rich, fine textured finishes. The soft gold finish elegantly gives warmth to the luminaire and enables designers to create a room's statement piece.

Berri can also be painted any RAL color. Contact factory for more details.


PLAY THE ANGLES

Berri has ten funky angular configurations that can be hung vertically, flat or at any angle up to 60 degrees, affording the kind of freedom designers crave.


With glowing spheres and beautifully finished rods, Berri is perfect for sophisticated hospitality settings where rich, diffused light sets the mood.

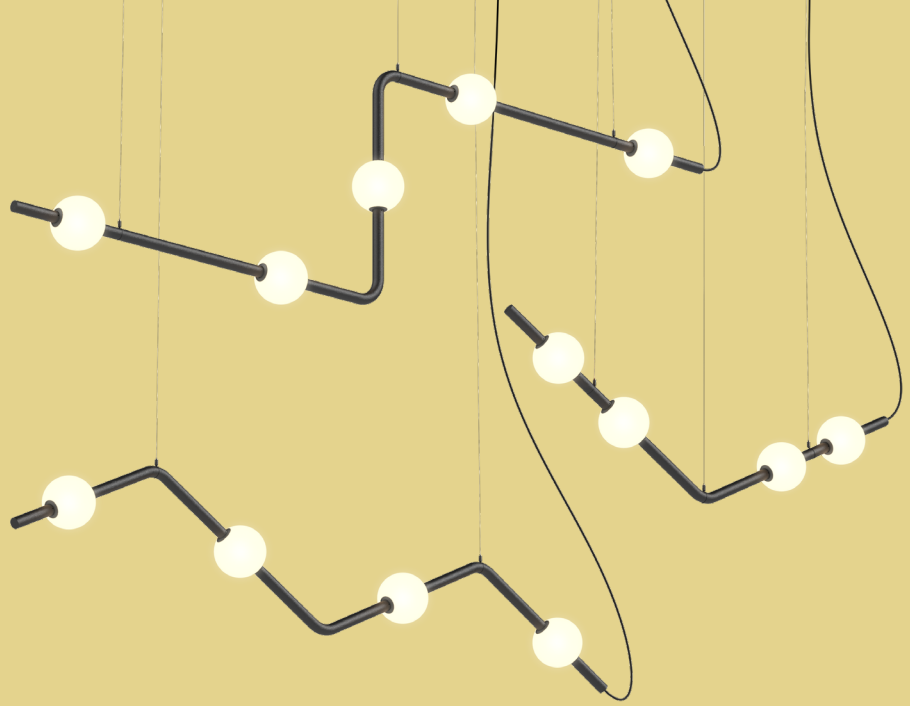


W04




W08




A04




A06




A08



S04




S05



Z03



Z05



Z06






W04 - SGO


 EUREKA

BERRI 74600-ANGULAR

PROJECT PROJET
SPEC TYPE
NOTES

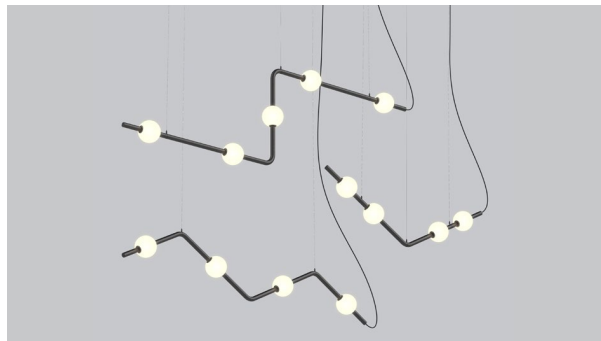


FINISH FINI

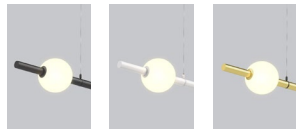


BLKE WHE SGO

FAMILY FAMILLE

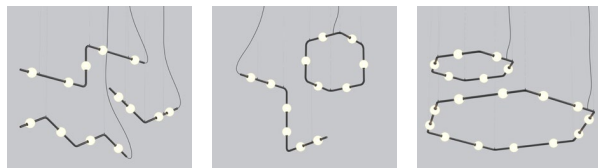


ANGULAR 3D HEXAGONAL

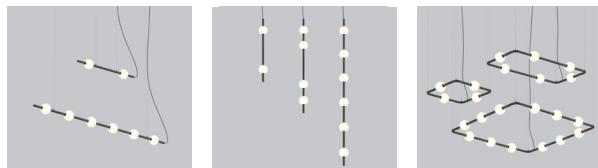


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

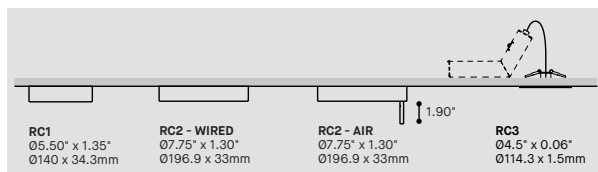

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

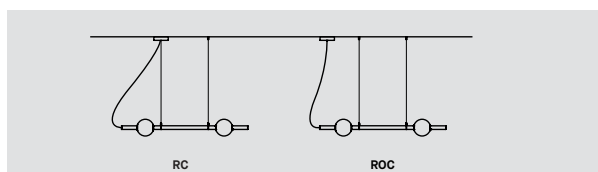


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-A04	BERRI ANGULAR V SHAPE 4 HEADS	
74600-A06	BERRI ANGULAR V SHAPE 6 HEADS	
74600-A08	BERRI ANGULAR V SHAPE 8 HEADS	
74600-S04	BERRI ANGULAR S SHAPE 4 HEADS	
74600-S05	BERRI ANGULAR S SHAPE 5 HEADS	
74600-W04	BERRI ANGULAR W SHAPE 4 HEADS	
74600-W06	BERRI ANGULAR W SHAPE 6 HEADS	
74600-Z03	BERRI ANGULAR Z SHAPE 3 HEADS	
74600-Z05	BERRI ANGULAR Z SHAPE 5 HEADS	
74600-Z06	BERRI ANGULAR Z SHAPE 6 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	* REQUIRES RC2 CANOPY * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO LIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE		
	FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION * REQUIRES RC1 CANOPY	
CABLE CÂBLE		
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	AC
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC1	SCREWLESS 1.35" CANOPY (2473F)	
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION * NON IC RATED FOR HO	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		
WHE	WHITE FINE TEXTURE	WH
ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

BERRI 74600-ANGULAR TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES

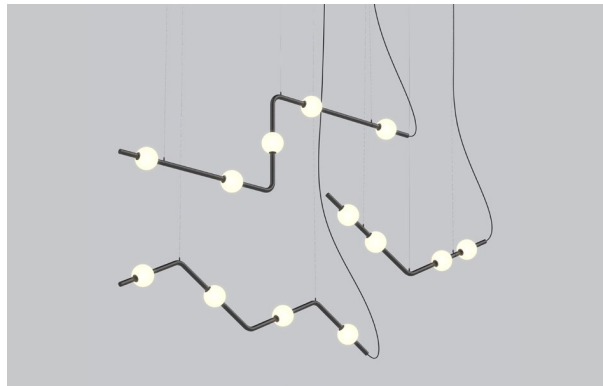


FINISH FINI

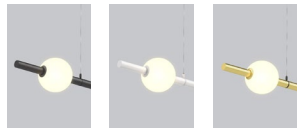


BLKE WHE SGO

FAMILY FAMILLE

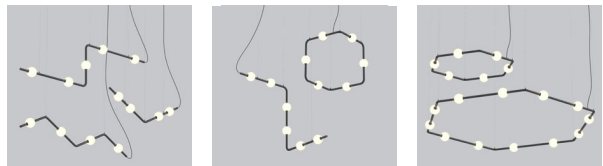


ANGULAR 3D HEXAGONAL

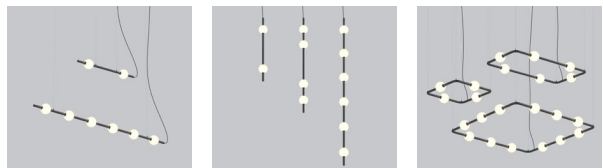


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

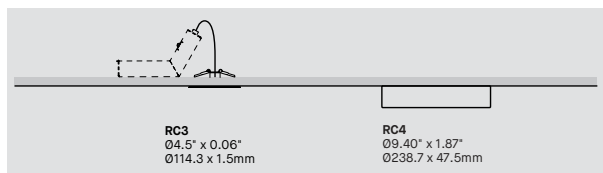

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

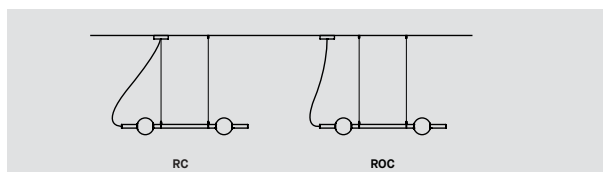


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-A04	BERRI ANGULAR V SHAPE 4 HEADS	
74600-A06	BERRI ANGULAR V SHAPE 6 HEADS	
74600-A08	BERRI ANGULAR V SHAPE 8 HEADS	
74600-S04	BERRI ANGULAR S SHAPE 4 HEADS	
74600-S05	BERRI ANGULAR S SHAPE 5 HEADS	
74600-W04	BERRI ANGULAR W SHAPE 4 HEADS	
74600-W06	BERRI ANGULAR W SHAPE 6 HEADS	
74600-Z03	BERRI ANGULAR Z SHAPE 3 HEADS	
74600-Z05	BERRI ANGULAR Z SHAPE 5 HEADS	
74600-Z06	BERRI ANGULAR Z SHAPE 6 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-A08	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
TW*	TUNABLE WHITE (2700K TO 5000K)	TW
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	80
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	AC
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (24751)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		
WH	WHITE	WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT





HEXAGONS



Define a meeting or gathering space, or subdivide a very large room with the buoyant, light feeling of Berri. Available in 3 large-scale hexagonal formats - 60" wide to an awe-inspiring 120" wide!

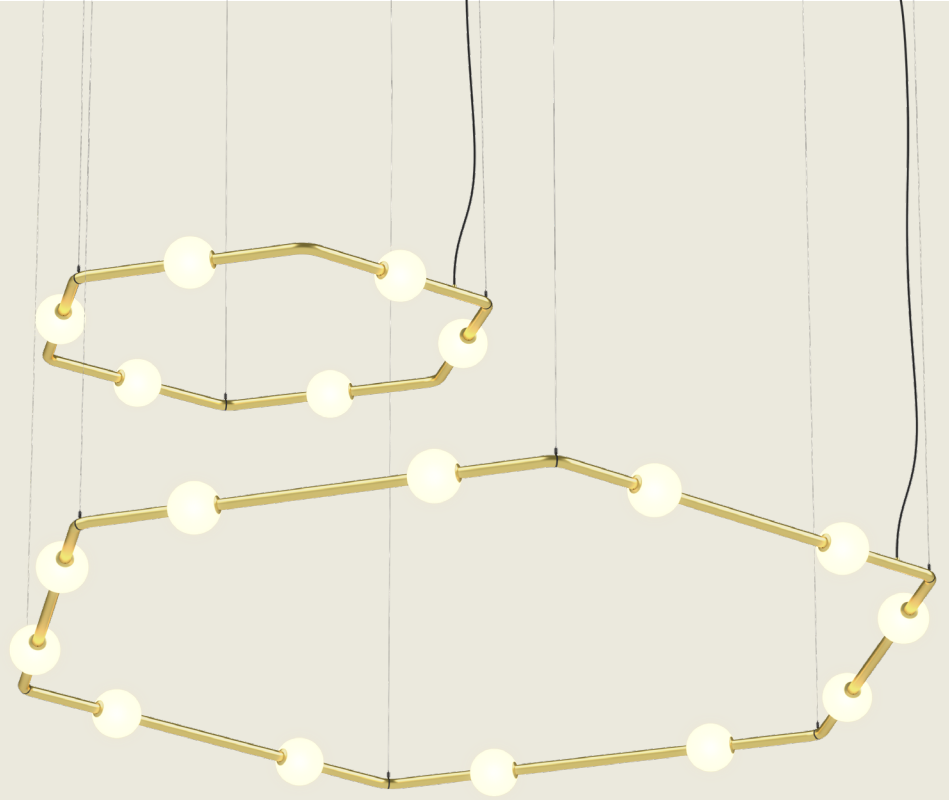



H06



H12-96



H12-120

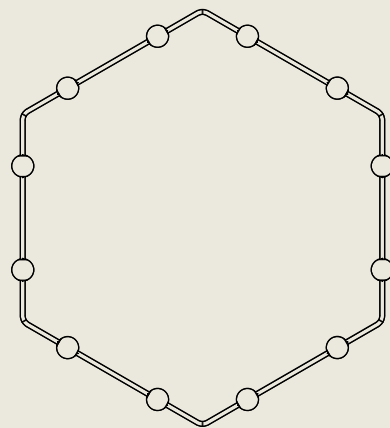





H06, H12-96, L03 - WHE

BERRI 74600 HEXAGONAL

PROJECT PROJÉT
SPEC TYPE
NOTES

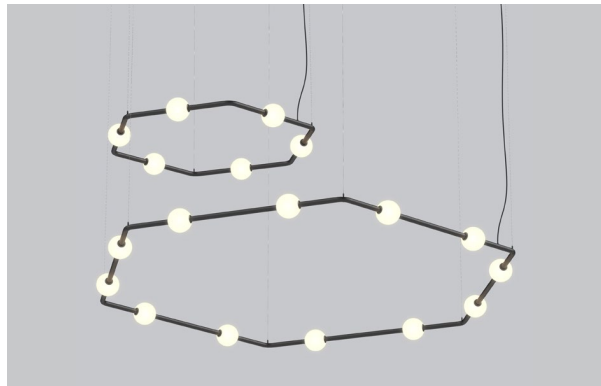


FINISH FINI




BLKE WHE SGO

FAMILY FAMILLE

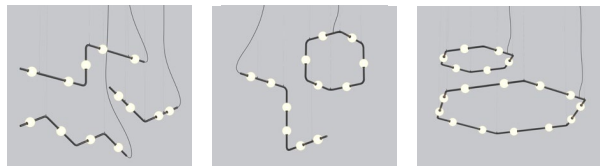


ANGULAR 3D HEXAGONAL

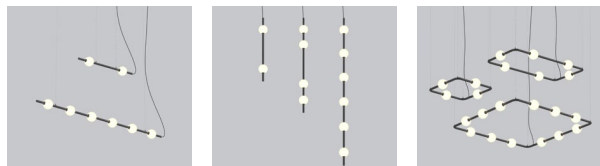


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

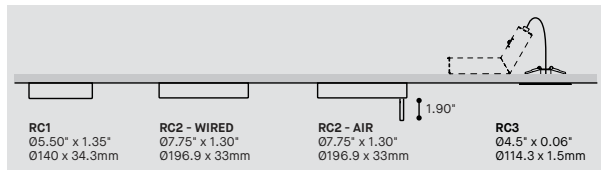

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

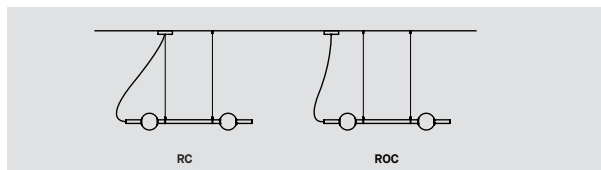

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

74600-H06 BERRI HEXAGONAL 6 HEADS
74600-H12-96 BERRI HEXAGONAL 12 HEADS 96"
74600-H12-120 BERRI HEXAGONAL 12 HEADS 120"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K
30 3000K
35 3500K
40 4000K

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
TUNABLE WHITE ALSO AVAILABLE. SEE TUNABLE WHITE SPEC SHEET.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI
90* 90+ CRI

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB* EMERGENCY BATTERY FOR REMOTE BOX
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION
* REQUIRES RC1 CANOPY

CABLE CÂBLE

AC

AC AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING OPTION OPTION DE MONTAGE

RC1 ROUND CANOPY / PAVILLON ROND
RC2 SCREWLESS 1.35" CANOPY (2473F)
RC2 NLIGHT SCREWLESS 1.30" CANOPY (2474H)
RC3* OFFSET SLIM PLATE ON REMOTE JBOX (2401A)
* ONLY AVAILABLE WITH ROC CANOPY POSITION
* NON IC RATED FOR HO

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RC CANOPY WITH AIRCRAFT CABLE
ROC CANOPY OFFSET TO AIRCRAFT CABLE

CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND

WHE WHITE FINE TEXTURE
BLKE BLACK FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

WH WHITE POWER CORD
BLK BLACK POWER CORD
CLR CLEAR POWER CORD

LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES

WHE WHITE FINE TEXTURE
BLKE BLACK FINE TEXTURE
SGO SOFT GOLD

TUBE FINISH FINI TUBE

WHE WHITE FINE TEXTURE
BLKE BLACK FINE TEXTURE
SGO SOFT GOLD
RAL* PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR

WH

WH WHITE

ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY


3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



BERRI 74600 HEXAGONAL TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES

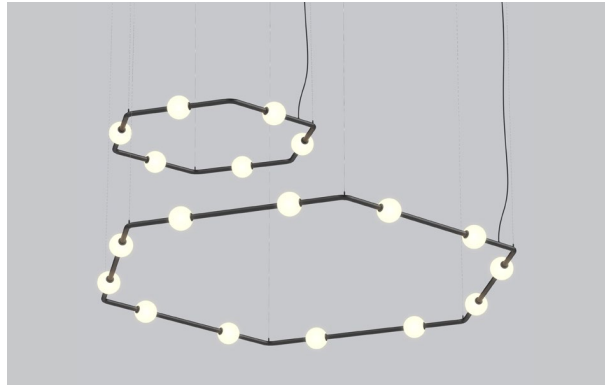


FINISH FINI




BLKE WHE SGO

FAMILY FAMILLE

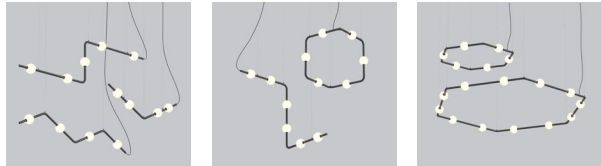


ANGULAR 3D HEXAGONAL

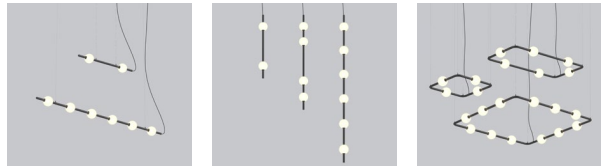


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

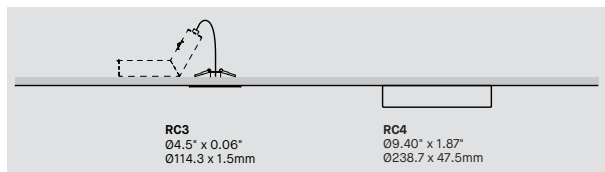

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

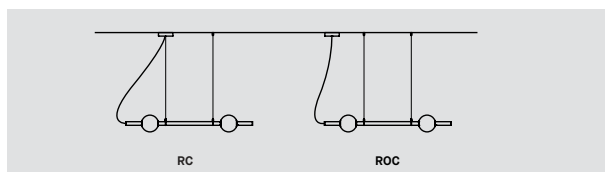

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-H06	BERRI 3D SQUARE 6 HEADS	
74600-H12-96	BERRI HEXAGONAL 12 HEADS 96"	
74600-H12-120	BERRI HEXAGONAL 12 HEADS 120"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-H12-96, 74600-H12-120	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		TW
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	*REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SOREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT






S04, S05, Z05, Z06 - BLKE



LINEAR LATITUDE

Play with horizontal Berri configurations. Seven designs with adjustable angles and multiple finishes enable designers to create a signature cluster or to give rhythm to a corridor.

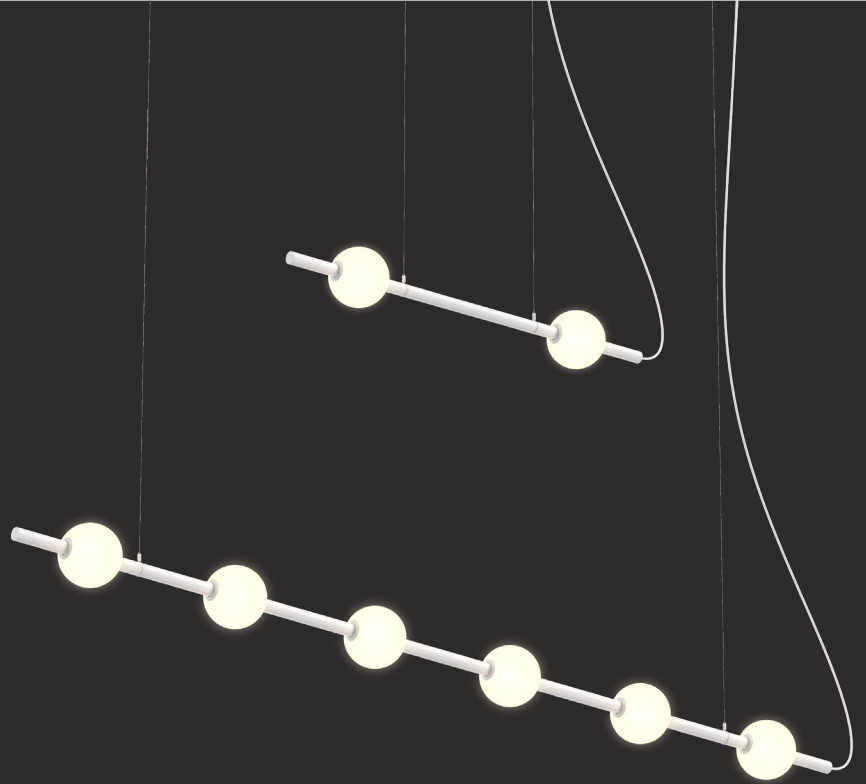

L02-36



L02-48



L03



L04



L05



L06




L08






BERRI 74600 HORIZONTAL

PROJECT PROJET
SPEC TYPE
NOTES

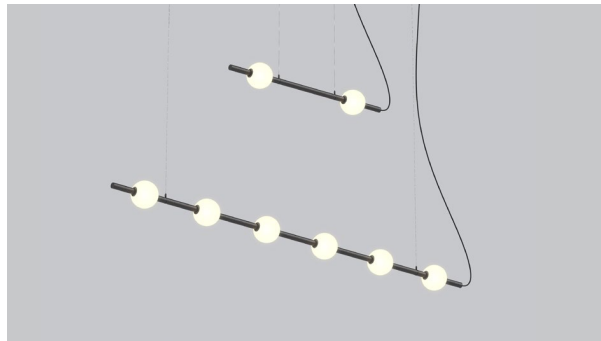


FINISH FINI

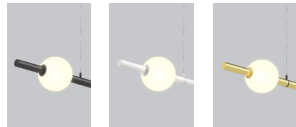


BLKE WHE SGO

FAMILY FAMILLE

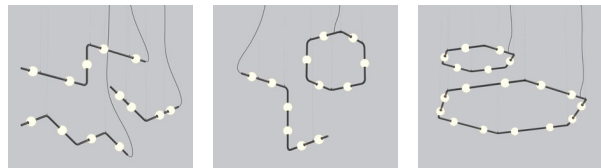


ANGULAR 3D HEXAGONAL

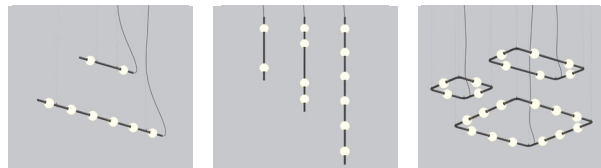


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

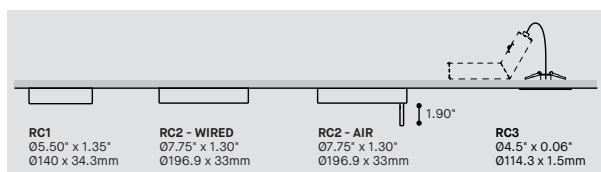

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

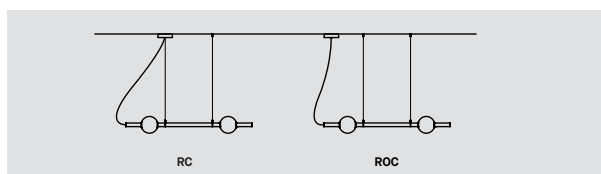


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-L02-36	BERRI HORIZONTAL 2 HEADS 36"	
74600-L02-48	BERRI HORIZONTAL 2 HEADS 48"	
74600-L03	BERRI HORIZONTAL 3 HEADS	
74600-L04	BERRI HORIZONTAL 4 HEADS	
74600-L05	BERRI HORIZONTAL 5 HEADS	
74600-L06	BERRI HORIZONTAL 6 HEADS	
74600-L08	BERRI HORIZONTAL 8 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-227V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* REQUIRES RC2 CANOPY * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERY BATTERIE D'URGENCE		
FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION * REQUIRES RC1 CANOPY		
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
RC1	ROUND CANOPY / PAVILLON ROND	
RC2	SCREWLESS 1.35" CANOPY (2473F)	
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
* ONLY AVAILABLE WITH ROC CANOPY POSITION * NON IC RATED FOR HO		
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

BERRI 74600 HORIZONTAL TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES

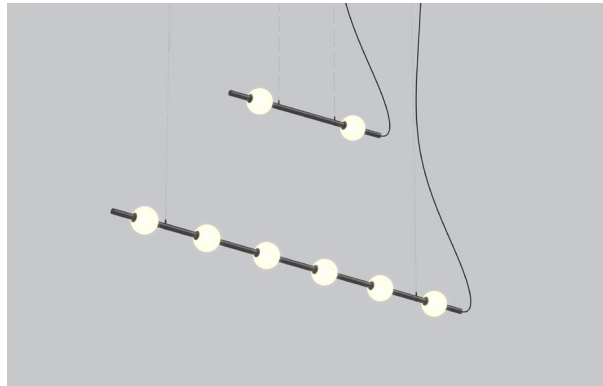


FINISH FINI

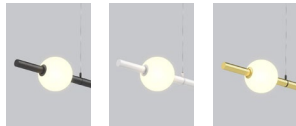


BLKE WHE SGO

FAMILY FAMILLE

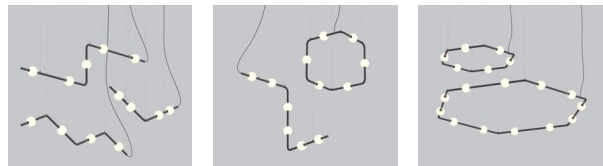


ANGULAR 3D HEXAGONAL

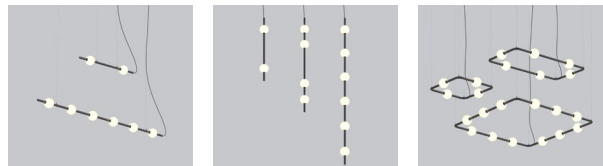


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

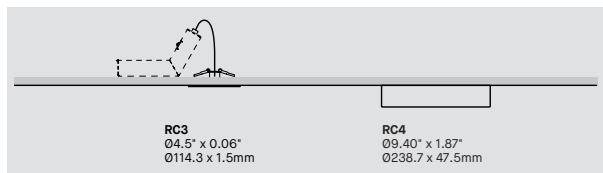

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

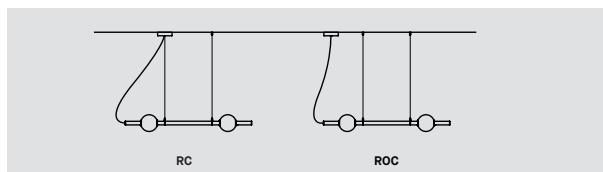

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE		
74600-L02-36	BERRI HORIZONTAL 2 HEADS 36"	
74600-L02-48	BERRI HORIZONTAL 2 HEADS 48"	
74600-L03	BERRI HORIZONTAL 3 HEADS	
74600-L04	BERRI HORIZONTAL 4 HEADS	
74600-L05	BERRI HORIZONTAL 5 HEADS	
74600-L06	BERRI HORIZONTAL 6 HEADS	
74600-L08	BERRI HORIZONTAL 8 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		TW
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-L08	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		80
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT








MIX AND MATCH

Berri provides designers with a wide array of possibilities. Diverse luminaires can be combined for effect while maintaining a uniform design aesthetic.


V02-36, V02-48, L05 - SGO

RIGHT ANGLES


Right size, right feel. Berri is available in square and rectangular configurations that accommodate 4 to 12 luminous heads each, adding interest, dimension, and delineating the space.

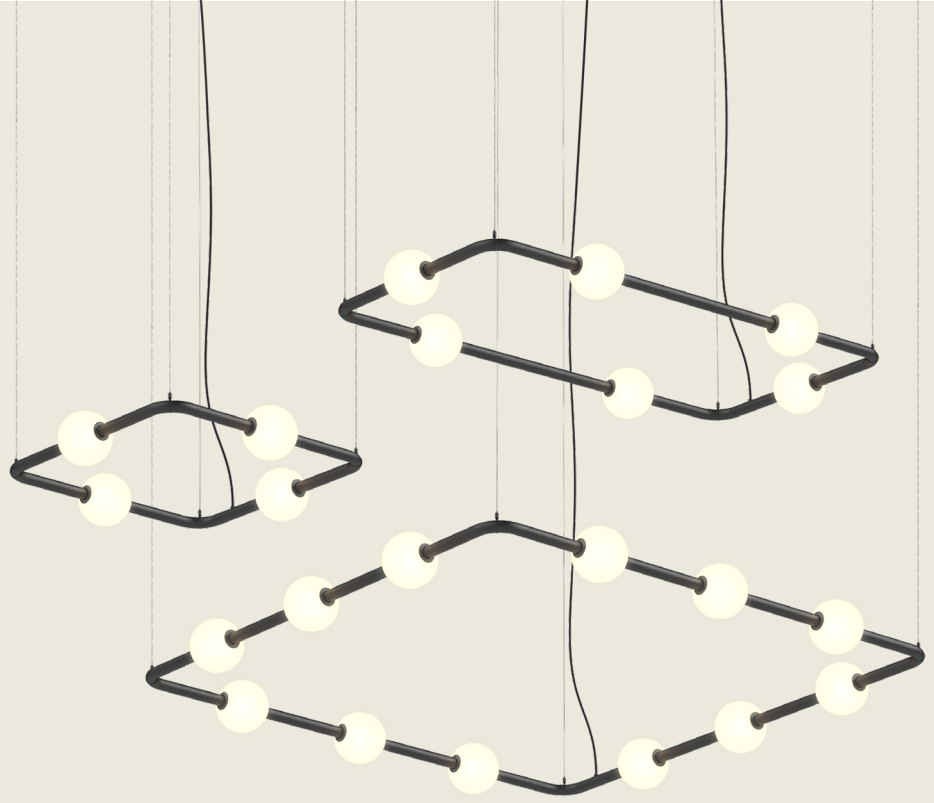


R04




R06




R10

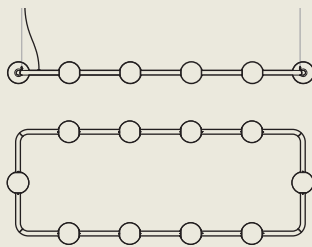

R08




R12

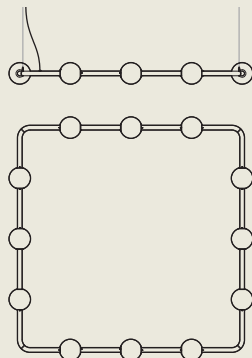




BERRI 74600 SQUARE & RECTANGLE

PROJECT PROJÉT
SPEC TYPE
NOTES

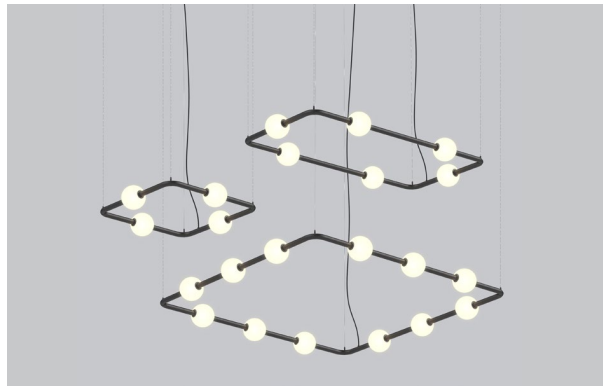


FINISH FINI

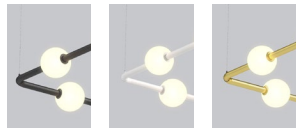


BLKE WHE SGO

FAMILY FAMILLE

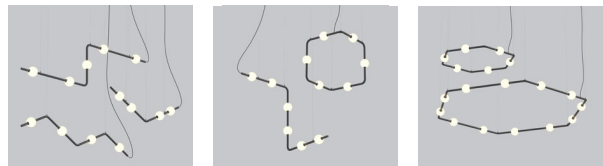


ANGULAR 3D HEXAGONAL

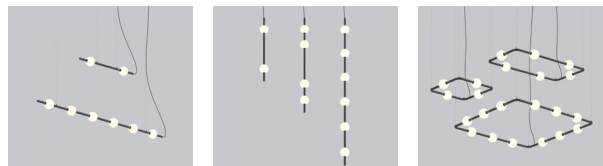


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

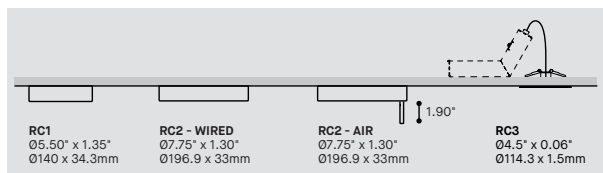


MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

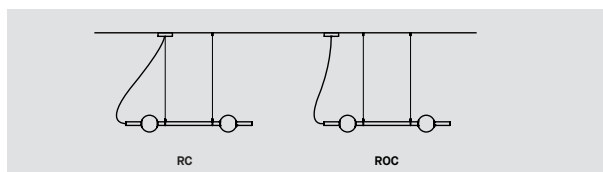

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-R04	BERRI SQUARE 4 HEADS	
74600-R06	BERRI RECTANGULAR 6 HEADS	
74600-R08	BERRI SQUARE 8 HEADS	
74600-R10	BERRI RECTANGLE 10 HEADS	
74600-R12	BERRI SQUARE 12 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-227V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	* REQUIRES RC2 CANOPY * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE		
	FOR 120-277V ONLY, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY, SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION * REQUIRES RC1 CANOPY	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
RC1	ROUND CANOPY / PAVILLON ROND	
RC2	SCREWLESS 1.35" CANOPY (2473F)	
RC2*	NLIGHT SCREWLESS 1.30" CANOPY (2474H)	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION * NON IC RATED FOR HO	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

BERRI 74600 SQUARE & RECTANGLE TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES

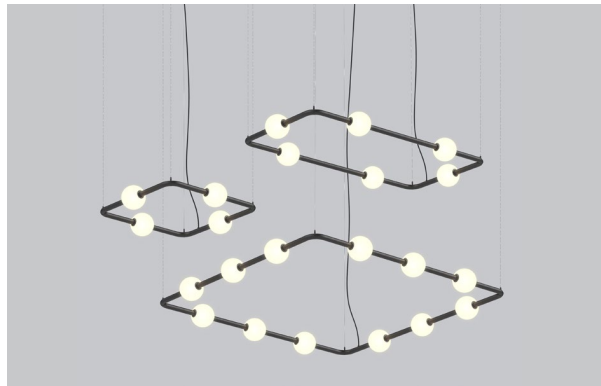


FINISH FINI




BLKE WHE SGO

FAMILY FAMILLE

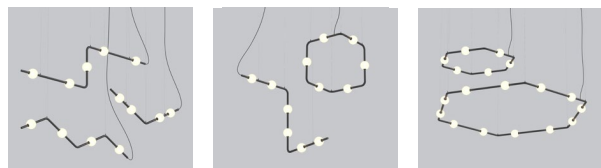


ANGULAR 3D HEXAGONAL

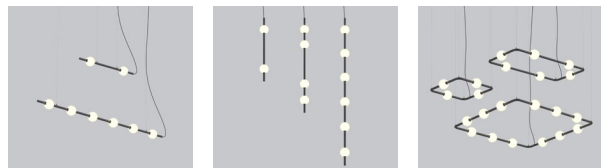


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

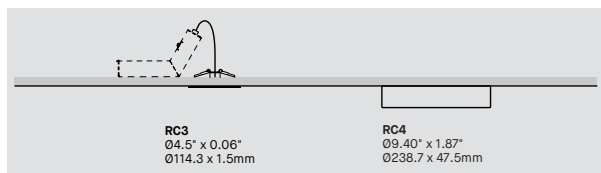

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

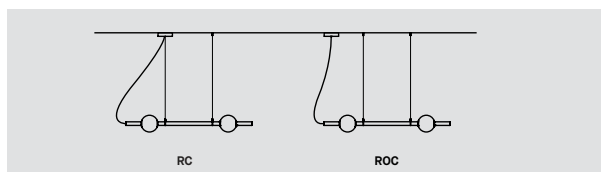


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-R04	BERRI SQUARE 4 HEADS	
74600-R06	BERRI RECTANGULAR 6 HEADS	
74600-R08	BERRI SQUARE 8 HEADS	
74600-R10	BERRI RECTANGLE 10 HEADS	
74600-R12	BERRI SQUARE 12 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT * NOT AVAILABLE WITH 74600-R08, 74600-R10, 74600-R12	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		TW
TW*	TUNABLE WHITE (2700K TO 5000K) * LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL * REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
RC3*	ROUND CANOPY / PAVILLON ROND	
RC4	OFFSET SLIM PLATE ON REMOTE JBOX (2401A) TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I) * ONLY AVAILABLE WITH ROC CANOPY POSITION * NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE * LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



STRAIGHT UP

Berri comes in 7 vertical configurations, from 3 ft to over 9 ft high. They add visual interest to high-ceilinged spaces or can be arranged into a modern chandelier as a staircase centerpiece.

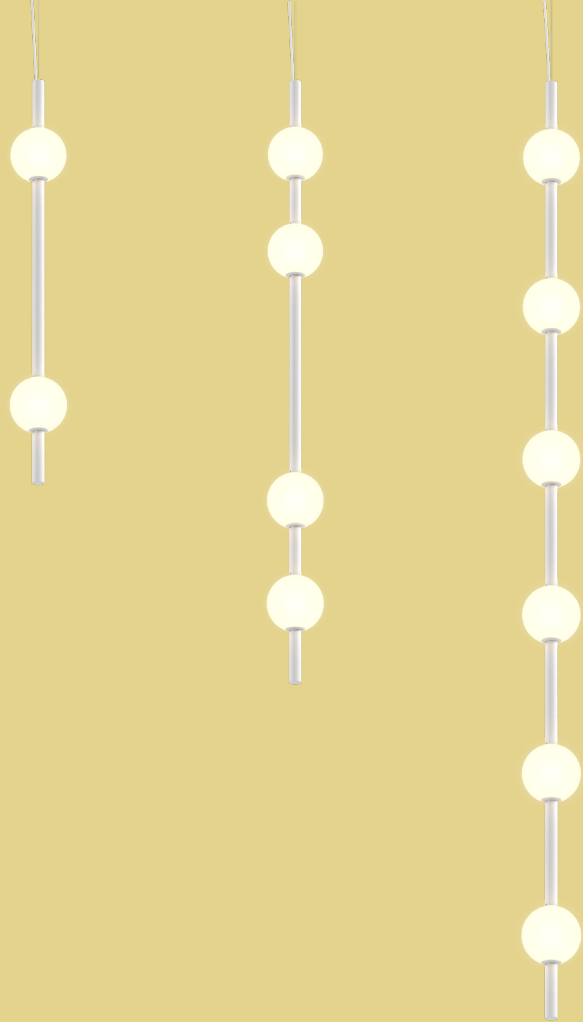

V02-36



V02-48



V03



V04



V05



V06



V08







V03, V04, V05, V06, V08 - SGO

BERRI 74600 VERTICAL

PROJECT PROJET
SPEC TYPE
NOTES

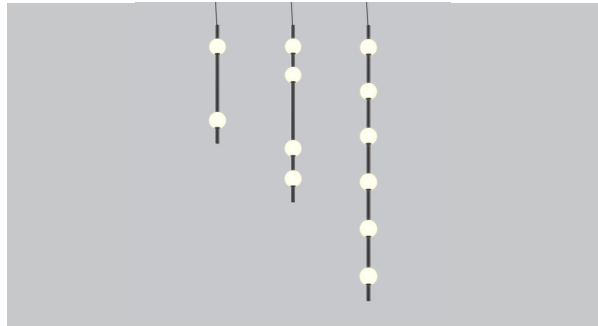


FINISH FINI




BLKE WHE SGO

FAMILY FAMILLE

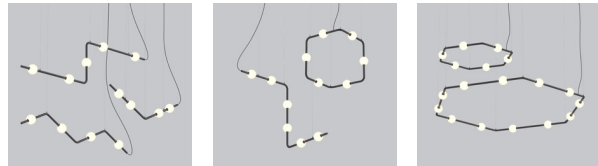


ANGULAR 3D HEXAGONAL

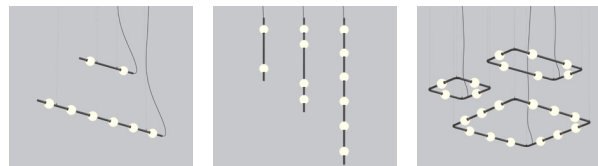


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

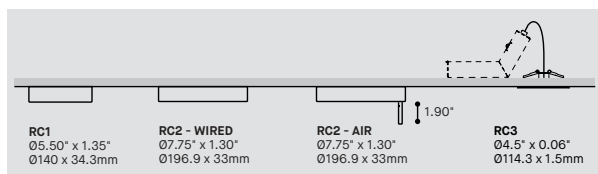

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

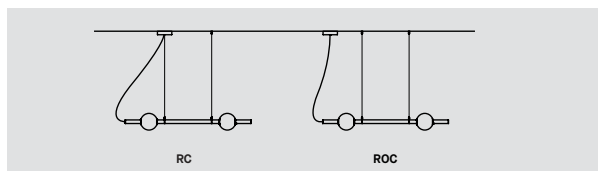


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	
74600-V02-36	BERRI VERTICAL 2 HEADS 36"
74600-V02-48	BERRI VERTICAL 2 HEADS 48"
74600-V03	BERRI VERTICAL 3 HEADS
74600-V04	BERRI VERTICAL 4 HEADS
74600-V05	BERRI VERTICAL 5 HEADS
74600-V06	BERRI VERTICAL 6 HEADS
74600-V08	BERRI VERTICAL 8 HEADS
LIGHT SOURCE SOURCE LUMINEUSE	
LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
27*	2700K
30	3000K
35	3500K
40	4000K
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	
80	80+ CRI
90*	90+ CRI
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE	
120V	120 VOLT
277V	277 VOLT
CONTROL OPTION OPTION DE GRADATION	
DV	0-10V DIMMING (120V-227V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL
* REQUIRES RC2 CANOPY * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE	
FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION * REQUIRES RC1 CANOPY	
CABLE CÂBLE	
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE
CABLE LENGTH LONGUEUR DE CÂBLE	
60	60" AIRCRAFT CABLE (STD LENGTH)
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
RC1	ROUND CANOPY / PAVILLON ROND
RC2	SCREWLESS 1.35" CANOPY (2473F)
RC3*	NLIGHT SCREWLESS 1.30" CANOPY (2474H) OFFSET SLIM PLATE ON REMOTE JBOX (2401A)
* ONLY AVAILABLE WITH ROC CANOPY POSITION * NON IC RATED FOR HO	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE	
RC	CANOPY WITH AIRCRAFT CABLE
ROC	CANOPY OFFSET TO AIRCRAFT CABLE
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND	
WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION	
WH	WHITE POWER CORD
BLK	BLACK POWER CORD
CLR	CLEAR POWER CORD
TUBE FINISH FINI TUBE	
WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
SGO	SOFT GOLD
RAL*	PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR	
WH	WHITE
ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

BERRI 74600 VERTICAL TUNABLE WHITE


PROJECT PROJET
SPEC TYPE
NOTES

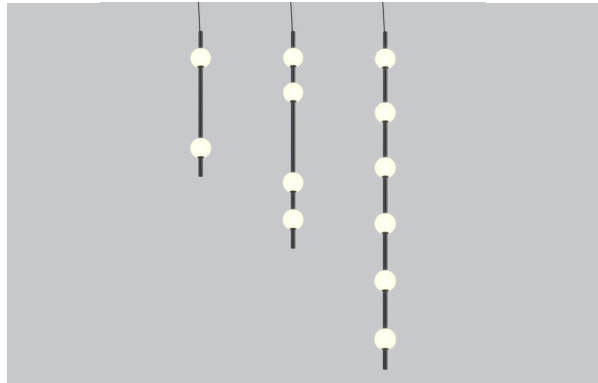


FINISH FINI




FAMILY FAMILLE

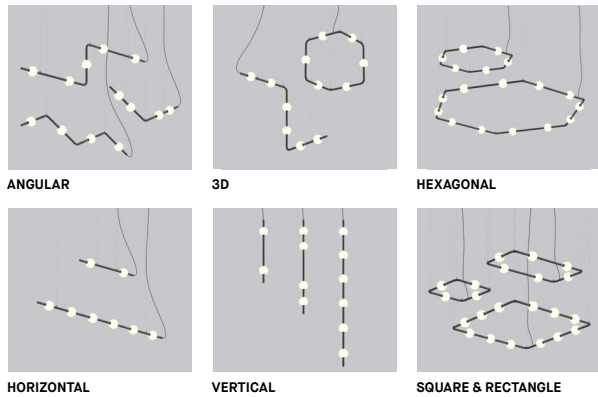

MOUNTING OPTION OPTION DE MONTAGE

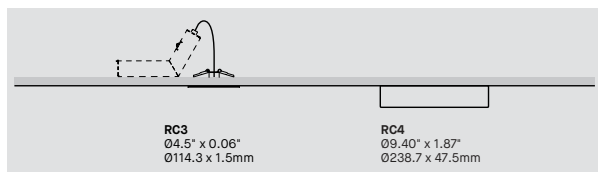

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

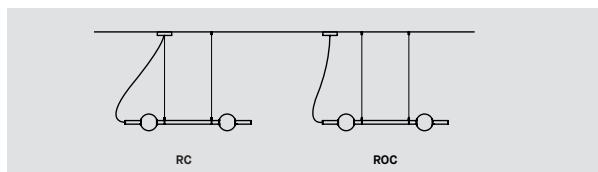

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE


MODEL MODÈLE		CODE
74600-V02-36	BERRI VERTICAL 2 HEADS 36"	
74600-V02-48	BERRI VERTICAL 2 HEADS 48"	
74600-V03	BERRI VERTICAL 3 HEADS	
74600-V04	BERRI VERTICAL 4 HEADS	
74600-V05	BERRI VERTICAL 5 HEADS	
74600-V06	BERRI VERTICAL 6 HEADS	
74600-V08	BERRI VERTICAL 8 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-V08	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		TW
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DDV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




BERRI 3D


Berri adds real three-dimensional appeal to lofty space. Multiple interlocking elements bring intricacy of design while a single pendant makes a simple, strong statement.

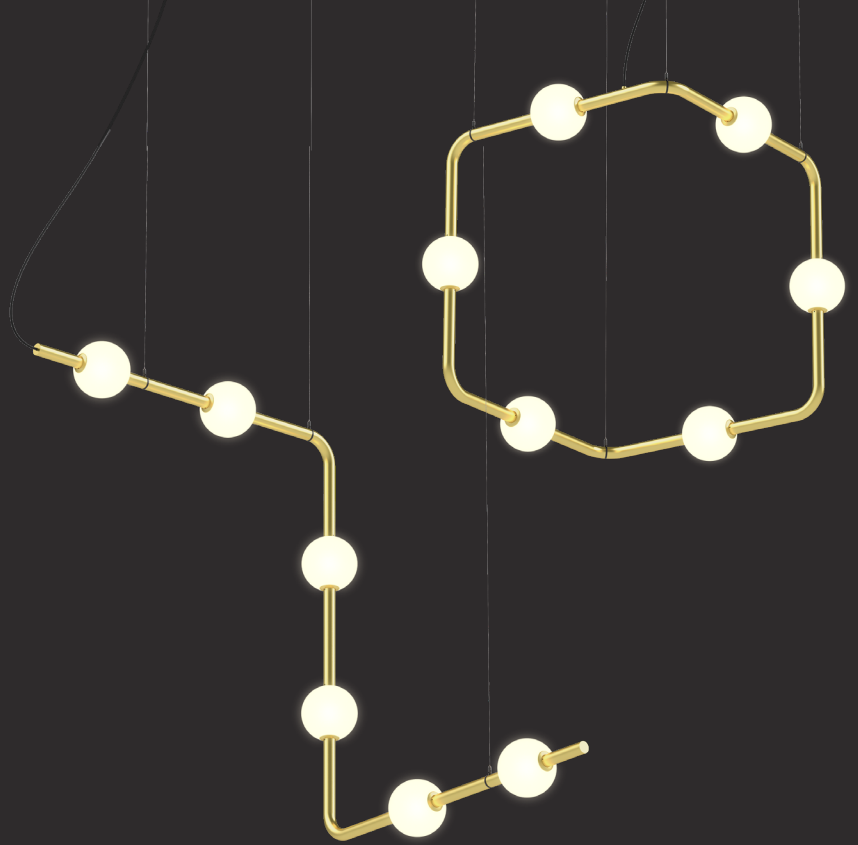


E03








E06



B06



B12







E03, E06, B06,B12 - BLKE

BERRI 74600-3D

PROJECT PROJÉT
SPEC TYPE
NOTES

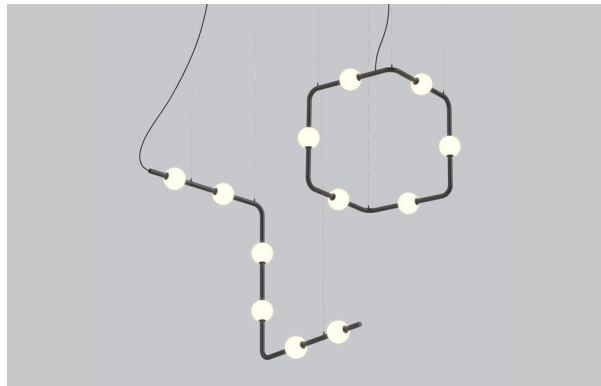


FINISH FINI

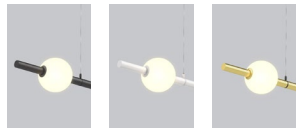


BLKE WHE SGO

FAMILY FAMILLE

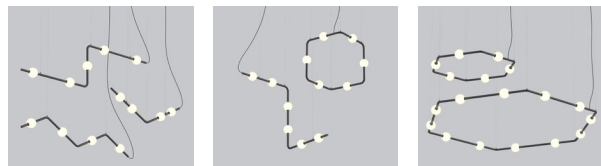


ANGULAR 3D HEXAGONAL

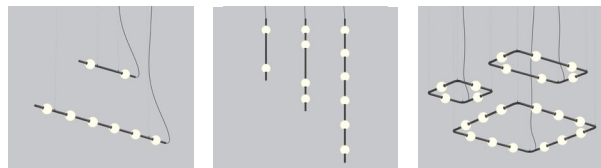


HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

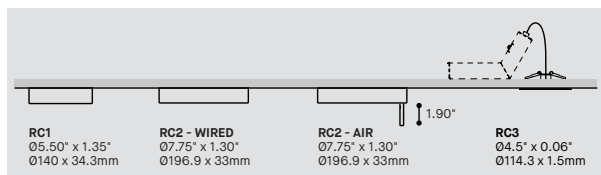

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

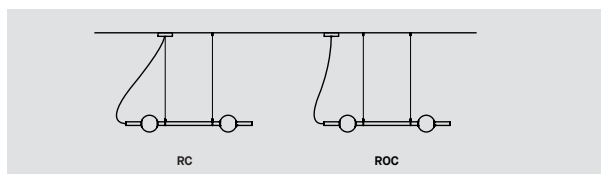


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-B06	BERRI 3D CUBE 6 HEADS	
74600-B12	BERRI 3D CUBE 12 HEADS	
74600-E03	BERRI 3D S 3 HEADS	
74600-E06	BERRI 3D S 6 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* REQUIRES RC2 CANOPY		
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS		
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERY BATTERIE D'URGENCE		
FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION		
* REQUIRES RC1 CANOPY		
CABLE CÂBLE		
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	AC
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING OPTION OPTION DE MONTAGE		
RC1	ROUND CANOPY / PAVILLON ROND	
RC2	SCREWLESS 1.35" CANOPY (2473F)	
RC2*	NLIGHT SCREWLESS 1.30" CANOPY (2474H)	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
* ONLY AVAILABLE WITH ROC CANOPY POSITION		
* NON IC RATED FOR HO		
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	
PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT		




BERRI 74600-3D TUNABLE WHITE

PROJECT PROJÉT
SPEC TYPE
NOTES

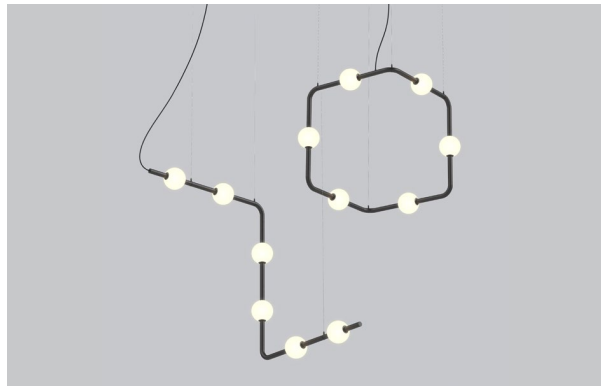


FINISH FINI

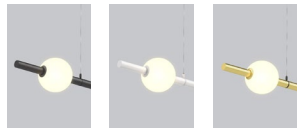

BLKE WHE SGO

FAMILY FAMILLE

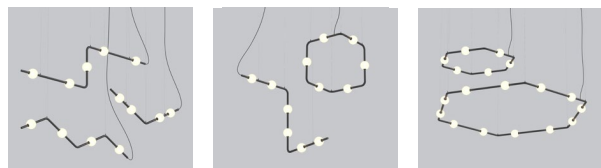


ANGULAR 3D HEXAGONAL




HORIZONTAL VERTICAL SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

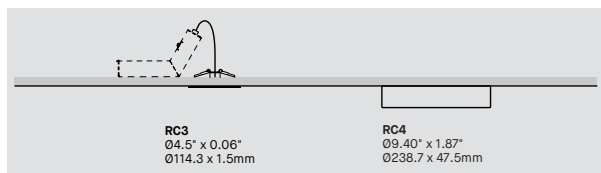

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

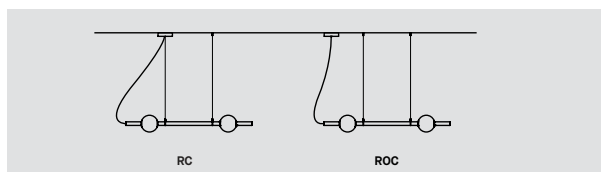

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74600-B06	BERRI 3D SQUARE 6 HEADS	
74600-B12	BERRI 3D SQUARE 12 HEADS	
74600-E03	BERRI 3D S 3 HEADS	
74600-E06	BERRI 3D S 6 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-B12	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		TW
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY & CEILING GRIPPERS FINISH FINI PAVILLON & ATTACHES AU PLAFOND		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
CLR	CLEAR POWER CORD	
LOOP & GRIPPERS FINISH FINI BOUCLES ET ATTACHES		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



TECHNICAL DATA

INSTALLATION WITHOUT CONSTRAINT

UP TO 60° FREE PLACEMENT 360° ADJUSTMENT ELBOWS CAN BE RECONFIGURED AT WILL

CANOPY OPTIONS

RC1 **RC2** **RC3** **RC4**

SCREWLESS 1.35" CANOPY NLIGHT SCREWLESS 1.30" CANOPY OFFSET SLIM PLATE ON REMOTE JBOX TUNABLE WHITE SCREWLESS 1.87" CANOPY

RC
CANOPY WITH AIRCRAFT CABLE

ROC
CANOPY OFFSET TO AIRCRAFT CABLE

HANGING POSSIBILITIES
Suspension cables can be placed freely along the tube and length can be easily adjusted for multiple hanging possibilities.

ROTMOLDED SHADE
Translucent white diffuser made of impact-resistant rotomolded polyethylene.

EFFORTLESS ASSEMBLY
Large Berri configurations are shipped in subassembly and are quickly joined with the tightening screws placed at each end of the tubes.

EASY CONNECTIONS
Electrically connect Berri modules or subassembly using quick-connect wire connectors.


DIFFUSED LIGHT
Two LED strips in the center of the diffuser provide diffused and uniform light.

VARIOUS COLORS OPTIONS
Extruded aluminum tubing, offered in 3 finishes : fine textured white, fine textured black and soft gold.


PRODUCT SPECIFICATION	PER HEAD			
	REG	HO	TUNABLE WHITE REG	TUNABLE WHITE HO
PERFORMANCE				
SYSTEM WATTAGE	4.4W	8.1W	4.4W	8W
DELIVERED LUMENS (4000K)	682 LM	1160 LM	577 LM	966 LM
EFFICACY	153 LM/W	143 LM/W	129 LM/W	119 LM/W
OTHER INFORMATION				
AVG. WEIGHT PER HEAD <small>* Refer to installation sheets for weight per configuration.</small>	1.5LBS / 0.7KG	1.5LBS / 0.7KG	1.5LBS / 0.7KG	1.5LBS / 0.7KG
L70 (LUMEN MAINTENANCE)	60,000	60,000	54,700	54,700
WELL & LEED STANDARD REQUIREMENTS				
MAX. LUMINANCE 450-900 OF NADIR	1150 CD/M ² (AT HO)			
CRI ≥90 LED BOARDS	YES (R9 = 58.8 WITH 4000K)			
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24			

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR	TW FACTOR
80+	5000K	-	0.93
80+	4000K	1.00	1.00
80+	3500K	0.98	0.99
80+	3000K	0.94	0.98
80+	2700K	0.91	0.91
90+	4000K	0.88	-
90+	3500K	0.85	-
90+	3000K	0.81	-
90+	2700K	0.77	-



Visit our website for warranty terms and conditions.

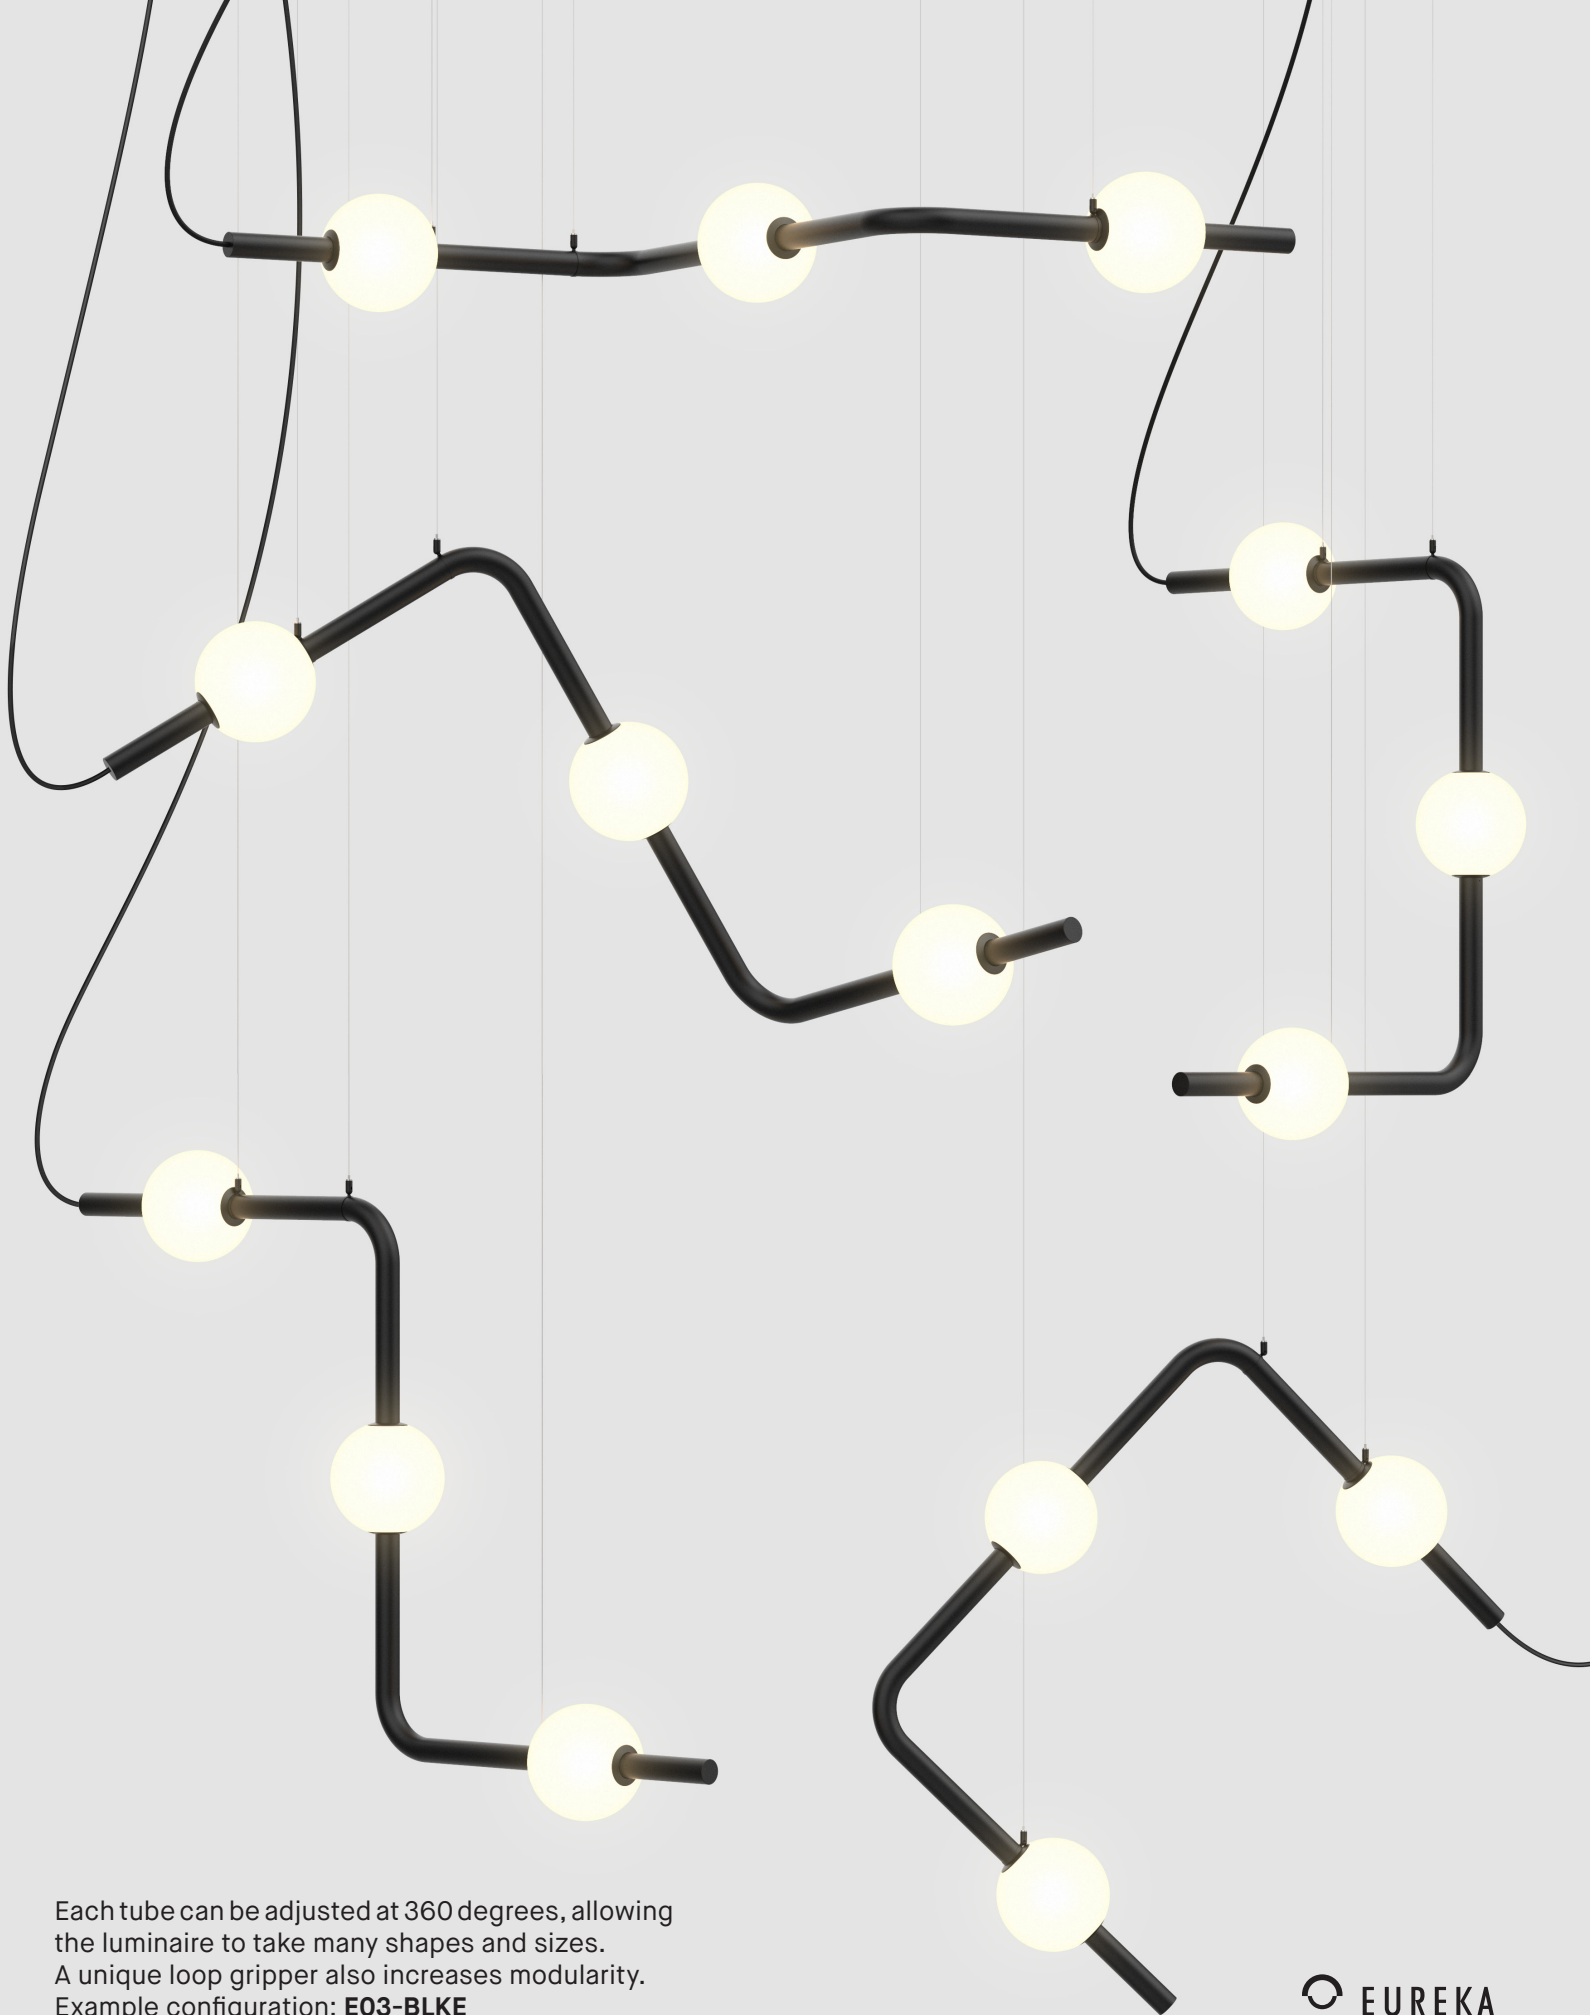

Each tube can be adjusted at 360 degrees, allowing the luminaire to take many shapes and sizes. A unique loop gripper also increases modularity. Example configuration: **E03-BLKE**

PHOTOMETRIC REPORT

BERRI 74800



SINGLE HEAD REQ

GCT (l0):	4000
Delivered Lumens (lm):	682
System wattage (W)*:	4.4
Distribution:	Direct/Indirect
Delivered Efficacy (lm/W):	153
Photometric type	C

Luminous dimensions	
Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.8 (200)
90-270 Axis:	11.8 (300)
Height:	7.8 (200)

Luminaire spacing criteria	
2 luminaires, plane 0:	1.49
2 luminaires, plane 90:	1.36
4 luminaires:	1.61

*System wattage includes driver and LED module consumption

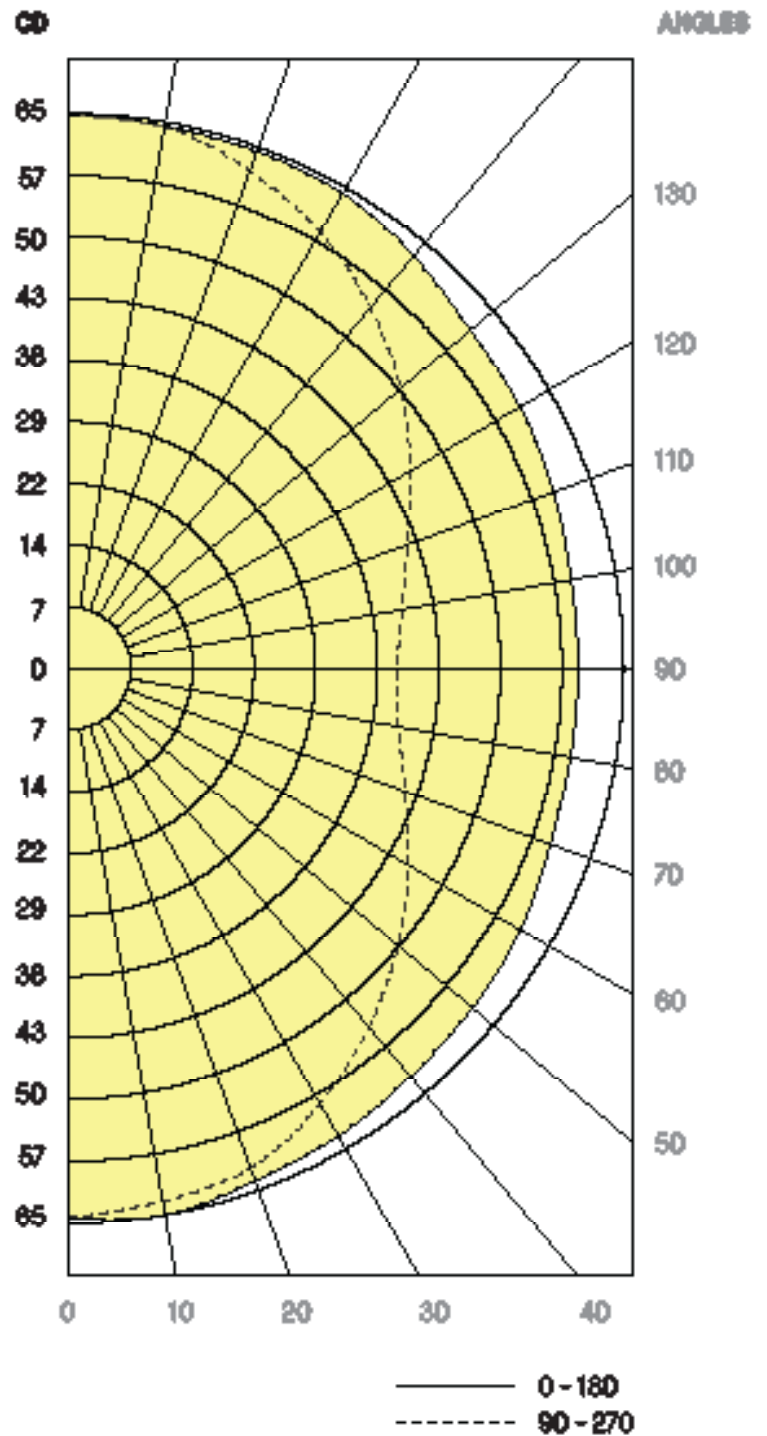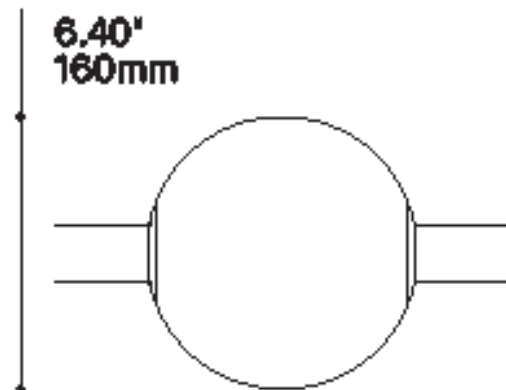

PHOTOMETRIC REPORT

BERRI 74800



SINGLE HEAD HO

CCT (K): 4000
Delivered Lumens (lm): 1180
System wattage (W)*: 8.1
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 143.2
Photometric type: C

Luminous dimensions
Luminous shape: Rectangle
Units: in (mm)
0-180 Axis: 7.8 (200)
90-270 Axis: 11.8 (300)
Height: 7.8 (200)

Luminaire spacing criteria
2 luminaires, plane 0: 1.47
2 luminaires, plane 90: 1.32
4 luminaires: 1.58

*System wattage includes driver and LED module consumption

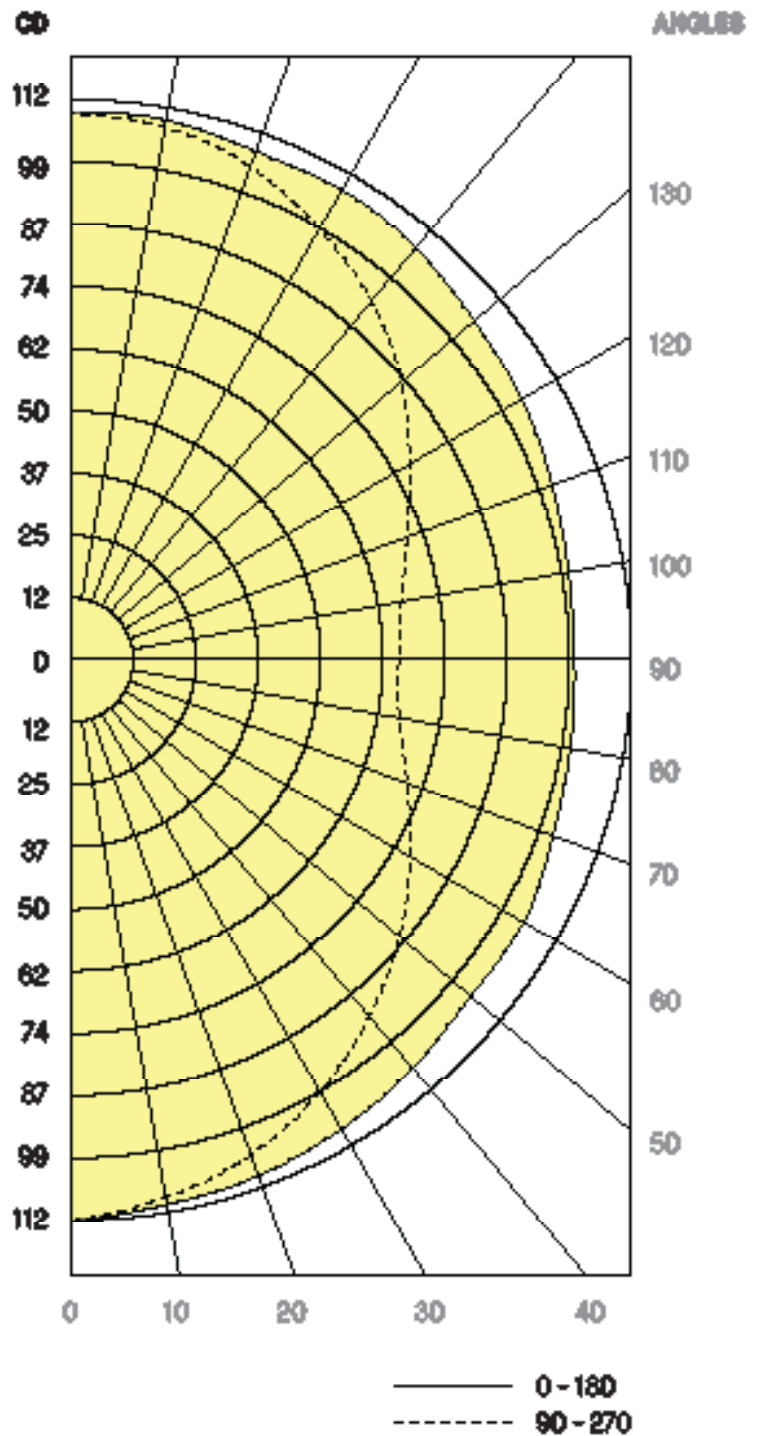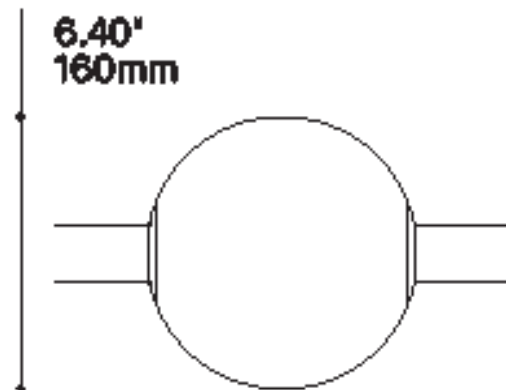

PHOTOMETRIC REPORT

BERRI 74800



SINGLE HEAD TUNABLE WHITE REQ

CCT (K): 4000
Delivered Lumens (lm): 577
System wattage (W)*: 4.4
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 129
Photometric type: C

Luminous dimensions
Luminous shape: Rectangle
Units: in (mm)
0-180 Axis: 7.8 (200)
90-270 Axis: 11.8 (300)
Height: 7.8 (200)

Luminaire spacing criteria
2 luminaires, plane 0: 1.47
2 luminaires, plane 90: 1.34
4 luminaires: 1.80

*System wattage includes driver and LED module consumption

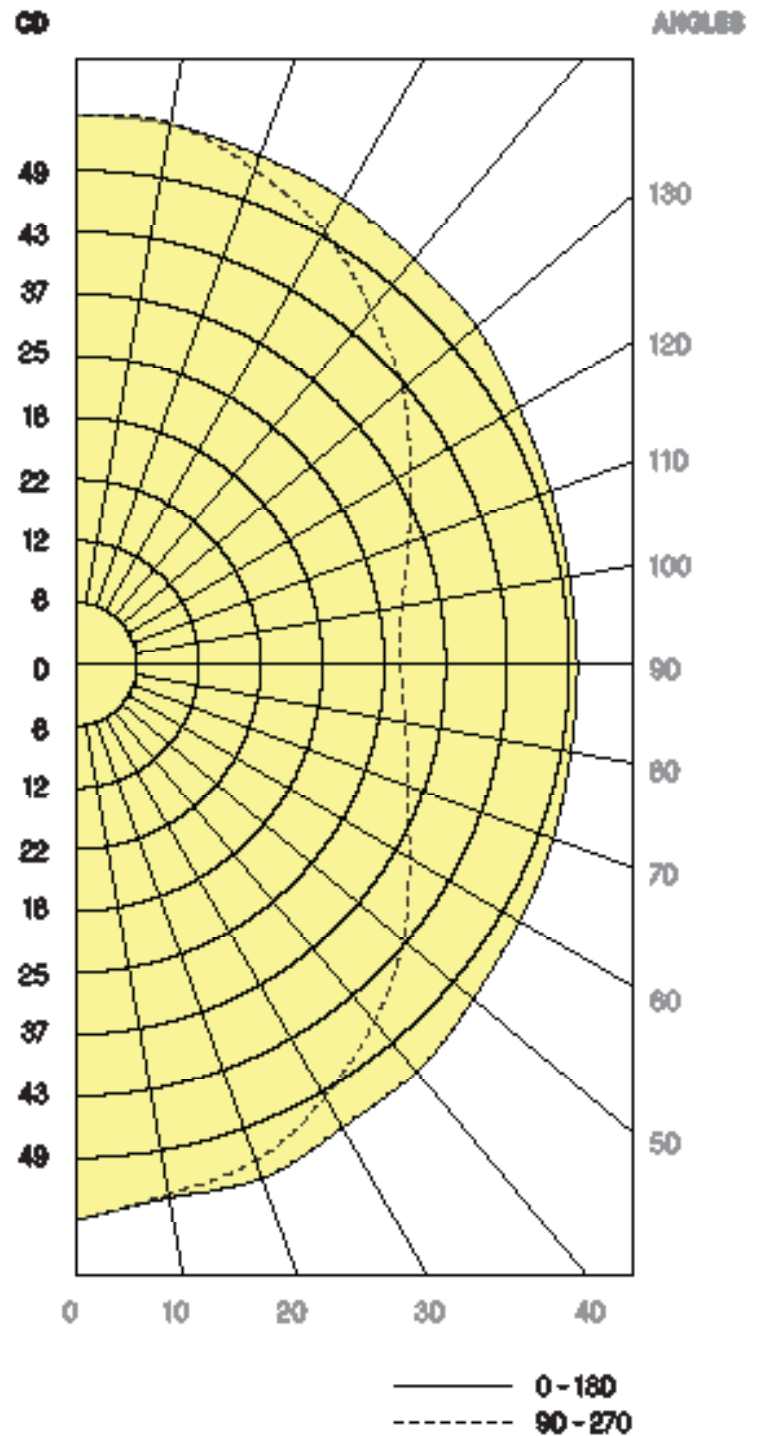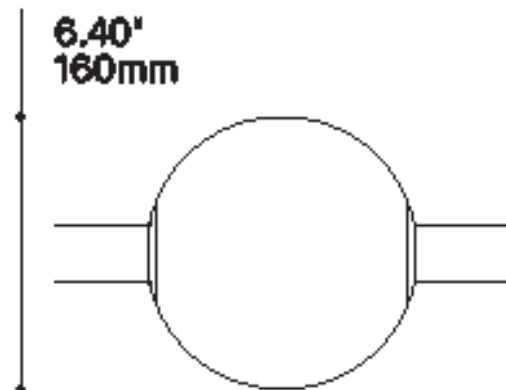

PHOTOMETRIC REPORT

BERRI 74800

SINGLE HEAD TUNABLE WHITE HO

CCT (K): 4000
Delivered Lumens (lm): 986
System wattage (W)*: 6.0
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 119
Photometric type: C

Luminous dimensions
Luminous shape: Rectangle
Units: in (mm)
0-180 Axis: 7.8 (200)
90-270 Axis: 11.8 (300)
Height: 7.8 (200)

Luminaire spacing criteria
2 luminaires, plane 0: 1.49
2 luminaires, plane 90: 1.36
4 luminaires: 1.61

*System wattage includes driver and LED module consumption

