



Felt colors shown: Blood Orange, Red, Zinfandel, Tangerine Orange

Softness looks sharp

Absorb noise in common and public areas with Mill acoustic luminaires, for an original soft aesthetic and atmosphere enhancing functionality.

With multiple sizes, colors and mounting options, optional uplight as well as an unlit version, Mill will help with volume control while adding a stunning design element to the decor.



red**dot** winner 2021





Increase the acoustic comfort of a space with the Mill family of scalable fixtures. Maintain a cohesive look with the choice of nine sizes, two mounting types and multiple light outputs.




Mill is available in 30 colors to add bursts of colors in a space. See Acoustic Color Options page, for all options.

Felt colors shown: Ocean Blue, Banana Yellow, Artic white




Paired with high-efficiency acoustic material, Mill's high light output is in keeping with the functional needs and volume of a space.

TECHNICAL DATA - MILL Ø14"

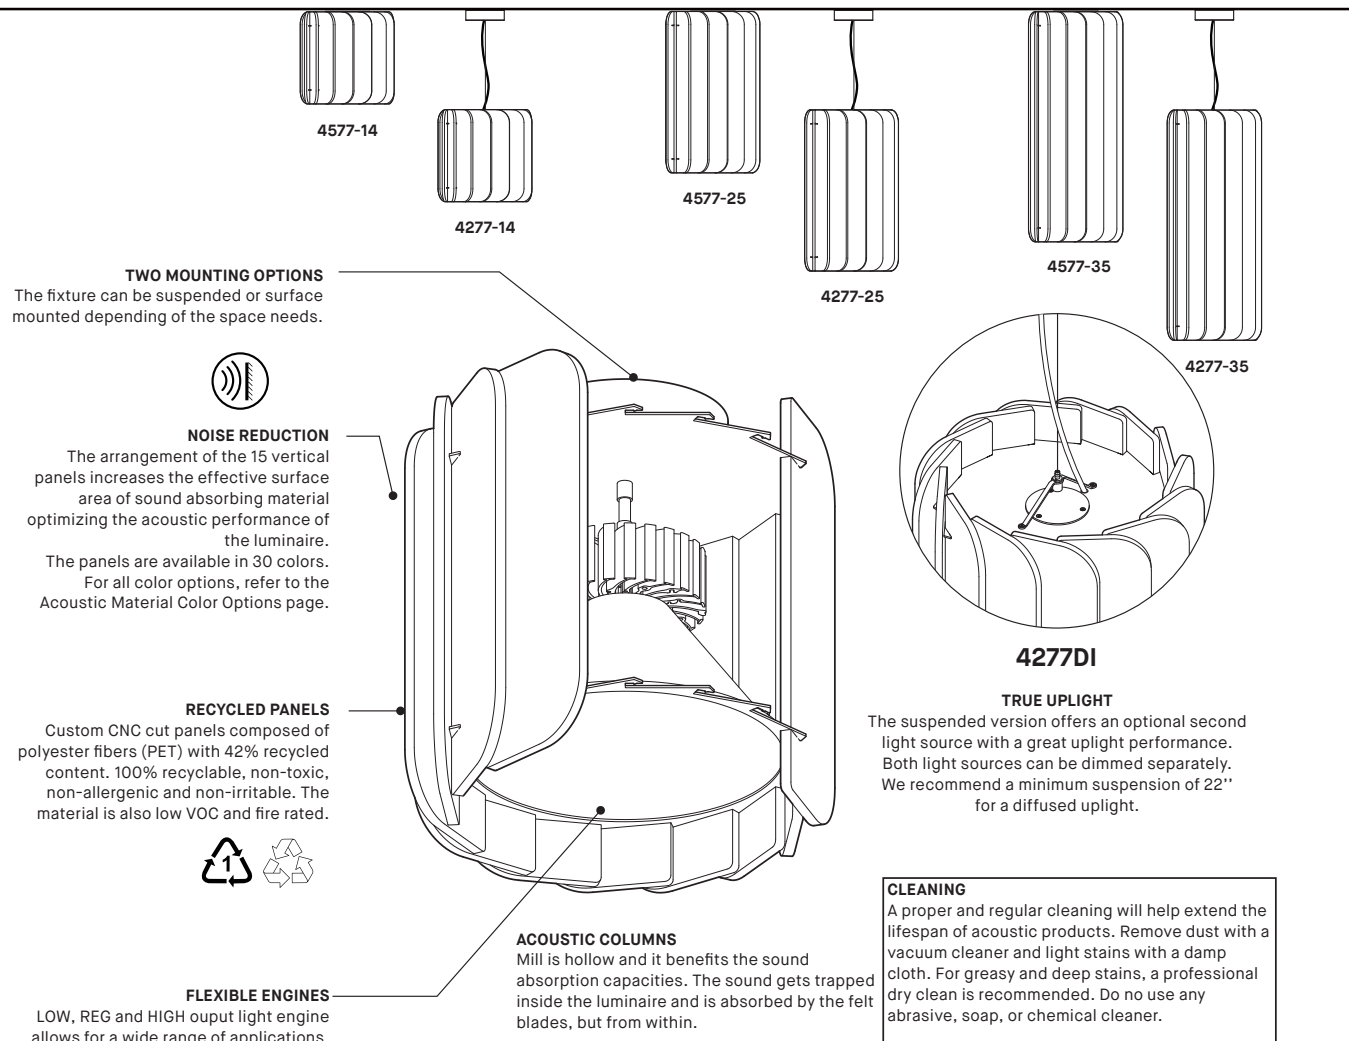


PRODUCT SPECIFICATION		Ø14" DIRECT			Ø14" INDIRECT		
PERFORMANCE	LO		REG	HO	REG	HO	
SYSTEM WATTAGE	14.4W		31.8W	50W	14.4W	20.6W	
DELIVERED LUMENS (4000K - SGF)	884LM		1732LM	2626LM	987LM	1342LM	
EFFICACY	61LM/W		54LM/W	52LM/W	68LM/W	65LM/W	
* Expect a 10% decrease in performance for CHF, REF and NBF (direct).							
OTHER INFORMATIONS	14"	25"	35"		14"	25"	35"
LUMINAIRE'S WEIGHT	11.3LBS	13LBS	15.2LBS		11.8LBS	13.5LBS	15.7LBS
L70 (LUMEN MAINTENANCE) DIRECT			> 63600 HRS				> 63600 HRS
L70 (LUMEN MAINTENANCE) INDIRECT			N/A				> 55000 HRS
FELT	HIGH DENSITY 9MM POLYESTER FELT						
ACOUSTIC	ACOUSTIC MATERIAL RATED AT 0.75 N						
FIRE RATING	ASTM E84-13 (FELT MATERIAL ONLY)						
WELL & LEED STANDARD REQUIREMENTS							
MAX. LUMINANCE 45°-90° OF NADIR	2180 CD/M²						
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)						
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24						


CRI	CCT	FACTOR
80+	4000K	1.14
80+	3500K	1.11
80+	3000K	1.08
80+	2700K	1.04
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

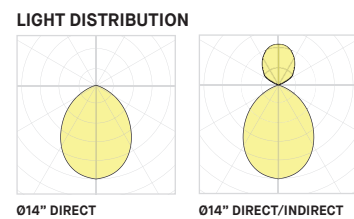

TECHNICAL DATA - MILL Ø36" / Ø47"

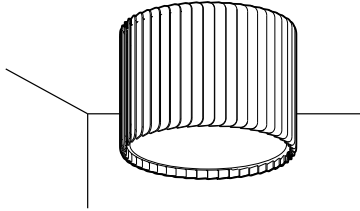


TWO MOUNTING OPTIONS
The fixture can be suspended or surface mounted depending of the space needs.




CANOPY POSITION

RCC

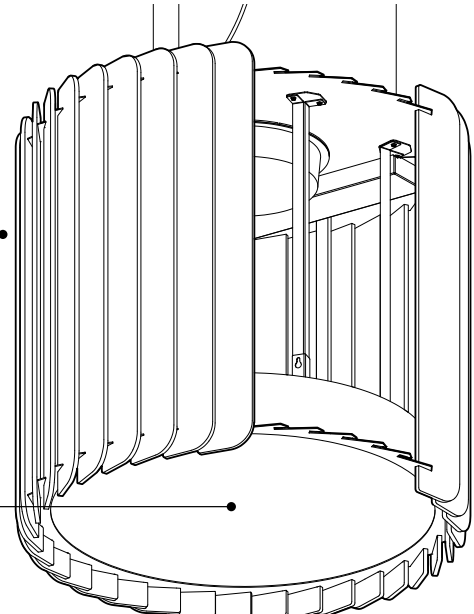


RECYCLED PANELS
Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.

FLEXIBLE ENGINES
LOW, REG and HIGH ouput light engine allows for a wide range of applications.



NOISE REDUCTION
The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire.
The panels are available in 30 colors.
For all color options, refer to the Acoustic Material Color Options page.

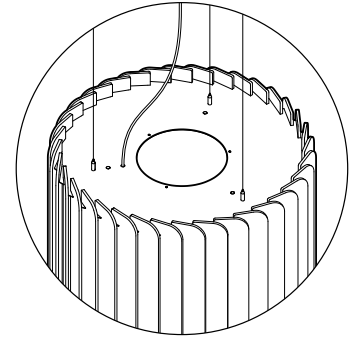

427X-DI

TRUE UPLIGHT
The suspended version offers an optional second light source with great uplift performance. Both light sources can be dimmed separately.
We recommend a minimum suspension of 22" for a diffused uplift.


CLEANING
A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do no use any abrasive, soap, or chemical cleaner.

PRODUCT SPECIFICATION	Ø36" DIRECT			Ø47" DIRECT			Ø36"/ Ø47" INDIRECT	
PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
SYSTEM WATTAGE	56W	82W	121W	128W	185W	276W	19W	29W
DELIVERED LUMENS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
OTHER INFORMATION								
WEIGHT	40LBS / 18KG			60LBS / 27KG				
L70 (LUMEN MAINTENANCE)	60,000			54,700				
WELL & LEED STANDARD REQUIREMENTS								
MAX. LUMINANCE 45°-90° OF NADIR	1 150 CD/M² (AT HO)							
LIGHT QUALITY	R9 > 50 (WITH 4000K)							


EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91


LIGHT DISTRIBUTION




Ø36" DIRECT



Ø47" DIRECT



Ø36" DIRECT/INDIRECT





Ø47" DIRECT/INDIRECT



Felt color shown: Basic Black

TECHNICAL DATA - MILL UNLIT

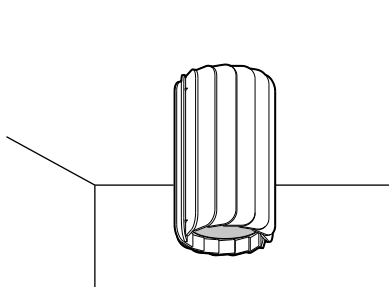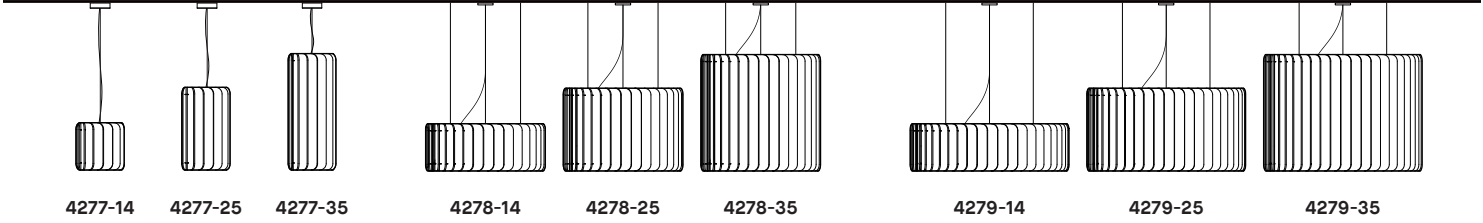



TWO MOUNTING OPTIONS
The fixture can be suspended or surface mounted depending of the space needs.

RECYCLED PANELS
Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.



FELT ACCENT
A felt disc adds an additional sound-absorbing element.

NOISE REDUCTION
The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire.
The panels are available in 30 colors.
For all color options, refer to the Acoustic Material Color Options page.

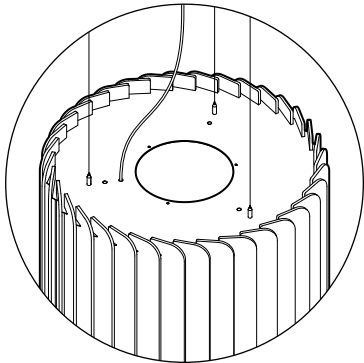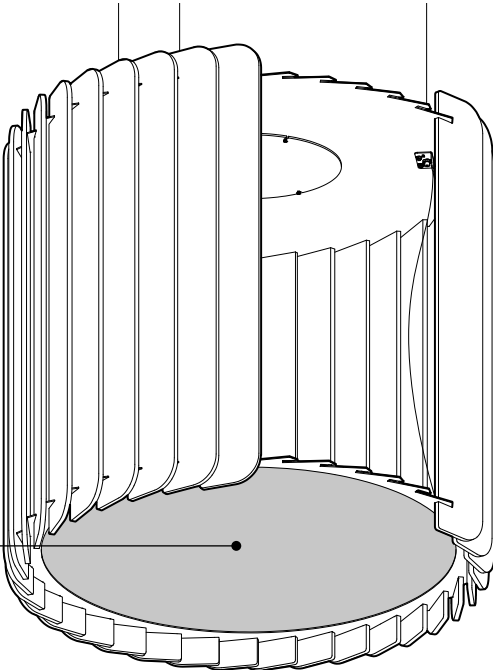

427XI
TRUE UPLIGHT
The suspended version offers an optional light source with great uplight performance. We recommend a minimum suspension of 22" for a diffused uplight.


CLEANING
A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do no use any abrasive, soap, or chemical cleaner.

ICT SPECIFICATION	Ø14" INDIRECT		Ø36" / Ø47" INDIRECT	
	REG	HO	REG	HO
MANANCE				
WATTAGE	14.4W	20.6W	19W	29W
ED LUMENS (4000K)	1121 LM	1525 LM	1408 LM	2051 LM
NFORMATION	Ø36"		Ø47"	
	10LBS / 4KG		30LBS / 13KG	
IN MAINTENANCE)	55,000		54,700	
ED STANDARD REQUIREMENTS				
QUALITY	R9 > 50 (WITH 4000K)			


CY MULTIPLIERS

CCT	FACTOR
4000K	1.00
3500K	0.98
3000K	0.94
2700K	0.91

LIGHT DISTRIBUTION



Ø14" INDIRECT



Ø36"/Ø47" INDIRECT



Felt color shown: Basic Black



Acoustic Material

Color Options for Mill



NOTES



SHADE FINISH FINI ABAT-JOUR



MOUNTING OPTIONS OPTIONS DE MONTAGE

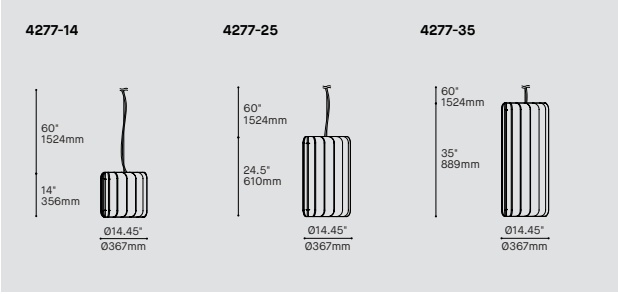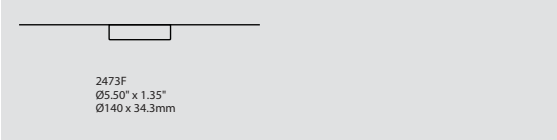

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



MODEL MODÈLE					
4277D-14	MILL 14" (DIRECT)				
4277D-25	MILL 25" (DIRECT)				
4277D-35	MILL 35" (DIRECT)				
4277DI-14	MILL 14" (DIRECT + INDIRECT)				
4277DI-25	MILL 25" (DIRECT + INDIRECT)				
4277DI-35	MILL 35" (DIRECT + INDIRECT)				
*DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY					
LIGHT SOURCE SOURCE LUMINEUSE					
4277D					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4277DI					
LED.LO.REG	LOW OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
30	3000K				
35	3500K				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80			
80	80+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
MOUNTING MONTAGE					
RC1	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY Ø5.50" X 1.35" (2473F)				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
DIFFUSER FINISH FINI DIFFUSEUR			WH		
WH	WHITE				






Felt colors shown: Ocean Blue

MILL 014" SURFACE


PROJECT	PROJET
SPEC TYPE	
NOTES	

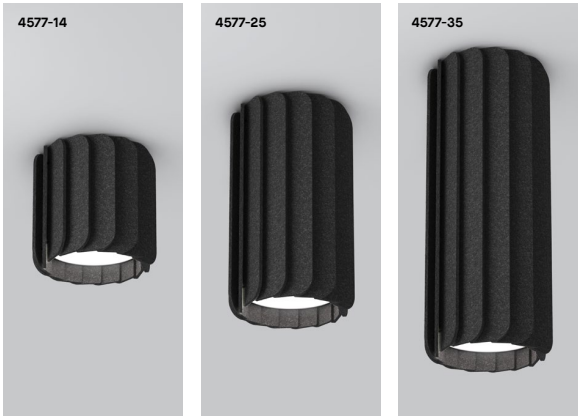

SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

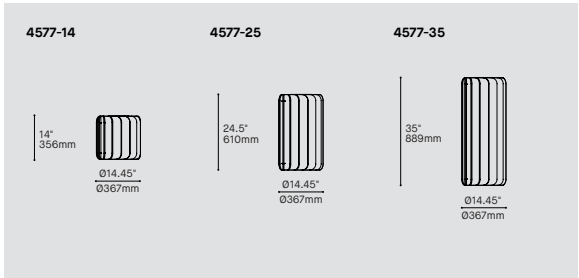

QUICKSHIP, CLICK HERE / CLIQUEZ ICI

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL		MODÈLE			
4577-14	MILL 14"				
4577-25	MILL 25"				
4577-35	MILL 35"				
LIGHT SOURCE		SOURCE LUMINEUSE			
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR			
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)			
80	80+ CRI				
90*	90+ CRI				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
VOLTAGE		VOLTAGE			
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION		OPTION DE CONTRÔLE			
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FO R NLTAIR2 OR 39NLWA FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
EMERGENCY BATTERY		BATTERIE D'URGENCE			
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.					
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
* 3981EA ACCESSORY IS REQUIRED					
SHADE FINISH		FINI ABAT-JOUR			
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTf	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
DIFFUSER FINISH		FINI DIFFUSEUR		WH	
WH	WHITE				
ACCESSORY		ACCESSOIRE			
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING					
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK				
39NLWA*	NLIGHT WIRED REMOTE POWER PACK				
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .					
EMERGENCY BATTERY ACCESSORY		ACCESSOIRE BATTERIE D'URGENCE			
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	With its fifteen acoustic panels shade, Mill offers an original soft aesthetic and atmosphere enhancing functionality. With multiple sizes, colors and mounting options as well as optional upright, Mill will help with volume control while adding a stunning design element to the decor.
INSTALLATION:	Easy and quick to install surface mounted system ideal for low ceiling installations. Also available as pendant.
LIGHT SOURCE:	This pendant offers powerful and evenly diffused lighting with a COB light source. Phase or 0-10V dimming offered.
SHADE:	The custom CNC rigid felt acoustic panels are available in multiple color. Composed of at least 40% of recycled polyethylene bottles (PET) which make them recyclable and orderless.
CERTIFIED:	c-CSA-us

MILL 014" SUSPENDED

PROJECT	PROJET
SPEC TYPE	
NOTES	





SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONS OPTIONS DE MONTAGE

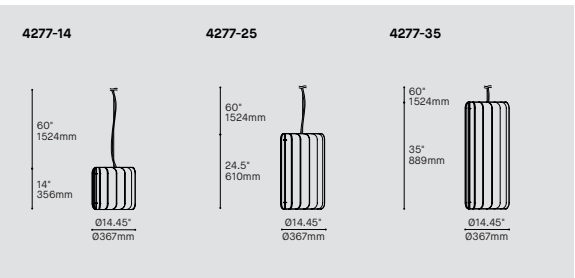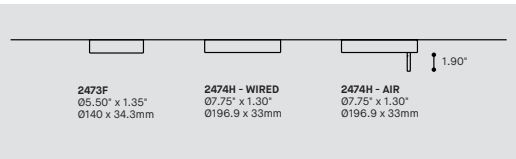

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



QUICKSHIP, CLICK HERE / CLIQUEZ ICI

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL MODÈLE					
4277D-14	MILL 14" (DIRECT)				
4277D-25	MILL 25" (DIRECT)				
4277D-35	MILL 35" (DIRECT)				
4277DI-14	MILL 14" (DIRECT + INDIRECT)				
4277DI-25	MILL 25" (DIRECT + INDIRECT)				
4277DI-35	MILL 35" (DIRECT + INDIRECT)				
*DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY					
LIGHT SOURCE SOURCE LUMINEUSE					
4277D					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4277DI					
LED.LO.REG	LOW OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)					
80	80+ CRI				
90*	90+ CRI				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
*DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS					
*REQUIRES RC2 CANOPY					
EMERGENCY BATTERY BATTERIE D'URGENCE					
APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.					
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
*3981EA ACCESSORY IS REQUIRED					
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
MOUNTING MONTAGE					
	ROUND CANOPY / PAVILLON ROND				
RC1	SCREWLESS CANOPY 05.50" X 1.35" (2473F)				
RC2	NLIGHT SCREWLESS CANOPY 07.75" x 1.30" (2474H)				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
DIFFUSER FINISH FINI DIFFUSEUR		WH			
WH	WHITE				
ACCESSORY ACCESSOIRE					
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				

MILL Ø36" SURFACE

PROJECTPROJET

SPEC TYPE


NOTES



SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

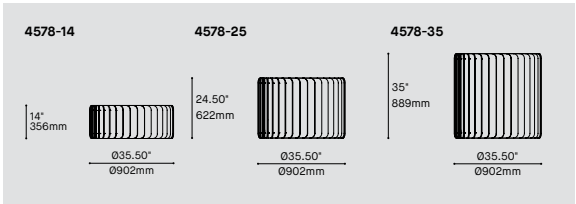

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE	
4578-14	MILL 14"	
4578-25	MILL 25"	
4578-35	MILL 35"	
LIGHT SOURCESOURCE LUMINEUSE		
LED.LO	LOW OUTPUT	
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTIONOPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT). * DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS * FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERYBATTERIE D'URGENCE		
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
SHADE FINISHFINI ABAT-JOUR		
ABF	AZURE BLUE FELT	BYF
AWF	ARCTIC WHITE FELT	CHF
BBF	BASIC BLACK FELT	CHF
BOF	BLOOD ORANGE FELT	CHF
BTF	BATTLESHIP GRAY FELT	CHF
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISHFINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORYACCESSOIRE		
ALL ACCESSOIRES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA*	NLIGHT WIRED REMOTE POWER PACK	
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .		
EMERGENCY BATTERY ACCESSORYACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICSCARACTÉRISTIQUES DU PRODUIT



DESIGN:	MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
INSTALLATION:	Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
LIGHT SOURCE:	This pendant offers powerful and evenly diffused lighting with a COB light source. 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
SHADE:	The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø47" SURFACE

PROJECTPROJET

SPEC TYPE


NOTES



SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

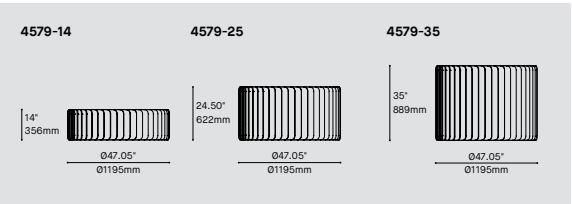

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE	
4579-14	MILL 14"	
4579-25	MILL 25"	
4579-35	MILL 35"	
LIGHT SOURCESOURCE LUMINEUSE		
LED.LO	LOW OUTPUT	
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTIONOPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT). * DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS * FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERYBATTERIE D'URGENCE		
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
SHADE FINISHFINI ABAT-JOUR		
ABF	AZURE BLUE FELT	BYF
AWF	ARCTIC WHITE FELT	CHF
BBF	BASIC BLACK FELT	CHF
BOF	BLOOD ORANGE FELT	CHF
BTF	BATTLESHIP GRAY FELT	CHF
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISHFINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORYACCESSOIRE		
ALL ACCESSOIRES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA*	NLIGHT WIRED REMOTE POWER PACK	
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .		
EMERGENCY BATTERY ACCESSORYACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICSCARACTÉRISTIQUES DU PRODUIT



DESIGN:	MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
INSTALLATION:	Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
LIGHT SOURCE:	This pendant offers powerful and evenly diffused lighting with a COB light source. 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
SHADE:	The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø36" SUSPENDED

PROJECTPROJET

SPEC TYPE

NOTES




SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONSOPTIONS DE MONTAGE

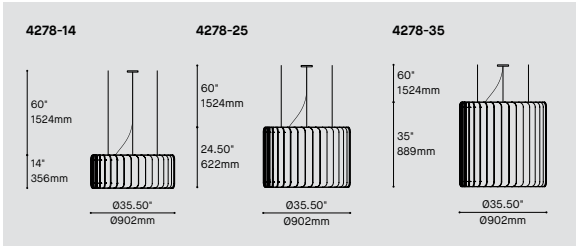

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE		
MODEL		MODÈLE				
4278D-14		MILL 14" (DIRECT)				
4278D-25		MILL 25" (DIRECT)				
4278D-35		MILL 35" (DIRECT)				
4278DI-14		MILL 14" (DIRECT + INDIRECT)				
4278DI-25		MILL 25" (DIRECT + INDIRECT)				
4278DI-35		MILL 35" (DIRECT + INDIRECT)				
LIGHT SOURCE		SOURCE LUMINEUSE				
4278D-XX						
LED.LO		LOW OUTPUT				
LED		REGULAR OUTPUT				
LED.HO		HIGH OUTPUT				
4278DI-XX						
LED.LO.REG		LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.LO.HO		LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.REG.REG		REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.REG.HO		REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.HO.REG		HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.HO.HO		HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR				
27		2700K				
30		3000K				
35		3500K				
40*		4000K				
		* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)		90		
90		90+ CRI				
		LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
VOLTAGE		VOLTAGE				
120V		120 VOLT				
277V		277 VOLT				
CONTROL OPTION		OPTION DE CONTRÔLE				
DV		0-10V DIMMING (120V-277V)				
NLTAIR2*		NLIGHT AIR CONTROL GEN 2				
NLIGHT*		NLIGHT WIRED CONTROL				
		*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).				
		* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS				
		* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
		REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.				
EMERGENCY BATTERY		BATTERIE D'URGENCE				
		APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.				
EMB*		EMERGENCY BATTERY FOR REMOTE BOX				
		* 3981EA ACCESSORY IS REQUIRED				
		POWER CORD FINISH IS ALWAYS CLEAR				
CABLE		CÂBLE		AC		
AC		AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
CABLE LENGTH		LONGUEUR DE CÂBLE				
60		60" AIRCRAFT CABLE (STD LENGTH)				
**		CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
		FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING		MONTAGE		RC1		
RC1		ROUND CANOPY / PAVILLON ROND				
		SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION		OPTION DE MONTAGE DE CÂBLE		RCC		
RCC		CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
CANOPY FINISH		FINI PAVILLON				
BLKE		BLACK FINE TEXTURE				
WHE		WHITE FINE TEXTURE				
POWER CORD FINISH		FINI CÂBLE D'ALIMENTATION				
BLK		BLACK POWER CORD				
WH		WHITE POWER CORD				
CLR		CLEAR POWER CORD				
SHADE FINISH		FINI ABAT-JOUR				
ABF		AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF		ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF		BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF		BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTf		BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*		PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
		* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				

DIFFUSER FINISH	FINI DIFFUSEUR	WH
WH	WHITE	
ACCESSORY	ACCESSOIRE	
ALL ACCESSOIRES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA*	NLIGHT WIRED REMOTE POWER PACK * FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .	
EMERGENCY BATTERY ACCESSORY	ACCESSOIRE BATTERIE D'URGENCE	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
INSTALLATION:	Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
LIGHT SOURCE:	This pendant offers powerful and evenly diffused lighting with a COB light source, 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
SHADE:	The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø47" SUSPENDED

PROJECTPROJET

SPEC TYPE

NOTES





SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONSOPTIONS DE MONTAGE

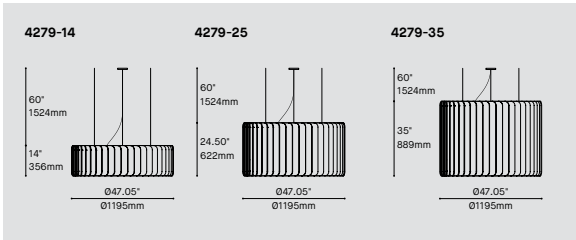

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE							
MODEL		MODÈLE									
4279D-14		MILL 14" (DIRECT)									
4279D-25		MILL 25" (DIRECT)									
4279D-35		MILL 35" (DIRECT)									
4279DI-14		MILL 14" (DIRECT + INDIRECT)									
4279DI-25		MILL 25" (DIRECT + INDIRECT)									
4279DI-35		MILL 35" (DIRECT + INDIRECT)									
LIGHT SOURCE		SOURCE LUMINEUSE									
4279D-XX											
LED.LO		LOW OUTPUT									
LED		REGULAR OUTPUT									
LED.HO		HIGH OUTPUT									
4279DI-XX											
LED.LO.REG		LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT									
LED.LO.HO		LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT									
LED.REG.REG		REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT									
LED.REG.HO		REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT									
LED.HO.REG		HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT									
LED.HO.HO		HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT									
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR									
27		2700K									
30		3000K									
35		3500K									
40*		4000K									
		* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE									
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)		90							
90		90+ CRI									
		LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE									
VOLTAGE		VOLTAGE									
120V		120 VOLT									
277V		277 VOLT									
CONTROL OPTION		OPTION DE CONTRÔLE									
DV		0-10V DIMMING (120V-277V)									
NLTAIR2*		NLIGHT AIR CONTROL GEN 2									
NLIGHT*		NLIGHT WIRED CONTROL									
		*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).									
		* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS									
		* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE									
		REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.									
EMERGENCY BATTERY		BATTERIE D'URGENCE									
		APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.									
EMB*		EMERGENCY BATTERY FOR REMOTE BOX									
		* 3981EA ACCESSORY IS REQUIRED									
		POWER CORD FINISH IS ALWAYS CLEAR									
CABLE		CÂBLE		AC							
AC		AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE									
CABLE LENGTH		LONGUEUR DE CÂBLE									
60		60" AIRCRAFT CABLE (STD LENGTH)									
**		CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)									
		FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE									
MOUNTING		MONTAGE		RC1							
RC1		ROUND CANOPY / PAVILLON ROND									
		SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)									
MOUNTING		CABLE OPTION		OPTION DE MONTAGE DE CÂBLE		RCC					
RCC		CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES									
CANOPY FINISH		FINI PAVILLON									
BLKE		BLACK FINE TEXTURE									
WHE		WHITE FINE TEXTURE									
POWER CORD FINISH		FINI CÂBLE D'ALIMENTATION									
BLK		BLACK POWER CORD									
WH		WHITE POWER CORD									
CLR		CLEAR POWER CORD									
SHADE FINISH		FINI ABAT-JOUR									
ABF		AZURE BLUE FELT		BYF		BANANA YELLOW FELT		REF		RED FELT	
AWF		ARCTIC WHITE FELT		CHF		CHARCOAL FELT		SGF		SILVER GRAY FELT	
BBF		BASIC BLACK FELT		NBF		NAVY BLUE FELT		TGF		TITANIUM GRAY FELT	
BOF		BLOOD ORANGE FELT		OBF		OCEAN BLUE FELT		ZFF		ZINFANDEL FELT	
BTf		BATTLESHIP GRAY FELT		PGF		PEAR GREEN FELT					
PREMIUM*		PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE									
		* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE									

DIFFUSER FINISH	FINI DIFFUSEUR	WH
WH	WHITE	
ACCESSORY	ACCESSOIRE	
ALL ACCESSOIRES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK	
39NLWA*	NLIGHT WIRED REMOTE POWER PACK * FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .	
EMERGENCY BATTERY ACCESSORY	ACCESSOIRE BATTERIE D'URGENCE	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
INSTALLATION:	Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
LIGHT SOURCE:	This pendant offers powerful and evenly diffused lighting with a COB light source. 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
SHADE:	The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø14" UNLIT SURFACE

PROJECTPROJET

SPEC TYPE


NOTES

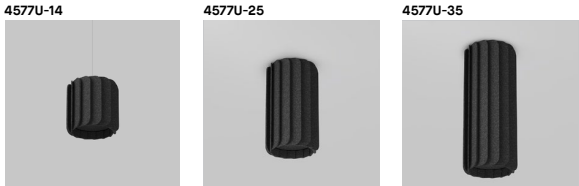

SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

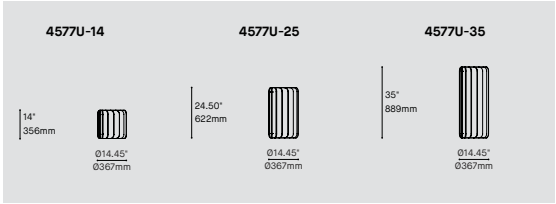

QUICKSHIPCLICK HERE / CLIQUEZ ICI

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE	
4577U-14	MILL UNLIT (Ø14" X 14")	
4577U-25	MILL UNLIT (Ø14" X 25")	
4577U-35	MILL UNLIT (Ø14" X 35")	
SHADE FINISH	FINI ABAT-JOUR	
ABF	AZURE BLUE FELT	BYF
AWF	ARCTIC WHITE FELT	CHF
BBF	BASIC BLACK FELT	NBF
BOF	BLOOD ORANGE FELT	OBF
BTf	BATTLESHIP GRAY FELT	PGF
PREMIUM *	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
BANANA YELLOW FELT	RED FELT	
CHARCOAL FELT	SILVER GRAY FELT	
NAVY BLUE FELT	TITANIUM GRAY FELT	
OCEAN BLUE FELT	ZINFANDEL FELT	
PEAR GREEN FELT		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: MILL is a fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces. Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.

INSTALLATION: The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

SHADE:

MILL Ø14" UNLIT SUSPENDED

PROJECTPROJET

SPEC TYPE


NOTES



SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

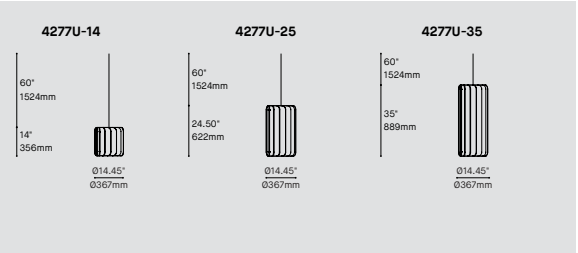

QUICKSHIPCLICK HERE / CLIQUEZ ICI

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE	
4277U-14	MILL UNLIT (Ø14" X 14")	
4277U-25	MILL UNLIT (Ø14" X 25")	
4277U-35	MILL UNLIT (Ø14" X 35")	
CABLE	CÂBLE	AC
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE	
CABLE LENGTH	LONGUEUR DE CÂBLE	
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
SHADE FINISH	FINI ABAT-JOUR	
ABF	AZURE BLUE FELT	BYF
AWF	ARCTIC WHITE FELT	CHF
BBF	BASIC BLACK FELT	NBF
BOF	BLOOD ORANGE FELT	OBF
BTf	BATTLESHIP GRAY FELT	PGF
PREMIUM *	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
BANANA YELLOW FELT	RED FELT	
CHARCOAL FELT	SILVER GRAY FELT	
NAVY BLUE FELT	TITANIUM GRAY FELT	
OCEAN BLUE FELT	ZINFANDEL FELT	
PEAR GREEN FELT		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: MILL is a fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces. Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.

INSTALLATION: The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottleswhich make them recyclable and odorless.

SHADE:

MILL 036"& 047 UNLIT SURFACE


PROJECTPROJET

SPEC TYPE

NOTES



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

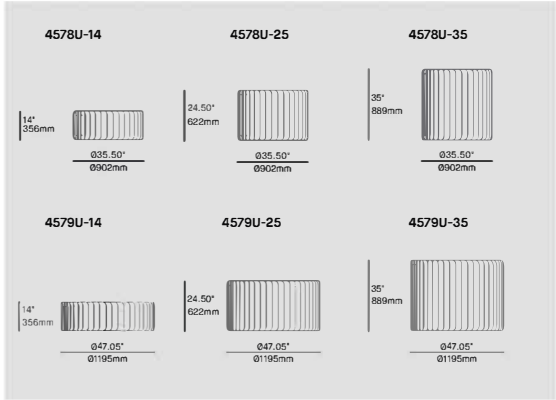

ORDERING SPECIFICATION				SPÉCIFICATION DE COMMANDE		CODE	
MODEL		MODÈLE					
4578U-14	MILL UNLIT (036" X 14")						
4578U-25	MILL UNLIT (036" X 25")						
4578U-35	MILL UNLIT (036" X 35")						
4579U-14	MILL UNLIT (047" X 14")						
4579U-25	MILL UNLIT (047" X 25")						
4579U-35	MILL UNLIT (047" X 35")						
SHADE FINISH		FINI ABAT-JOUR					
ABF	AZURE BLUE FELT		BYF	BANANA YELLOW FELT		REF	RED FELT
AWF	ARCTIC WHITE FELT		CHF	CHARCOAL FELT		SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT		NBF	NAVY BLUE FELT		TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT		OBF	OCEAN BLUE FELT		ZFF	ZINFANDEL FELT
BTf	BATTLESHIP GRAY FELT		PGF	PEAR GREEN FELT			
PREMIUM *	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE						
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE							

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN :
- INSTALLATION :
- SHADE :
- DESIGN :
- INSTALLATION :
- SHADE :

MILL 036" & 047" UNLIT SUSPENDED


PROJECTPROJET

SPEC TYPE

NOTES



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

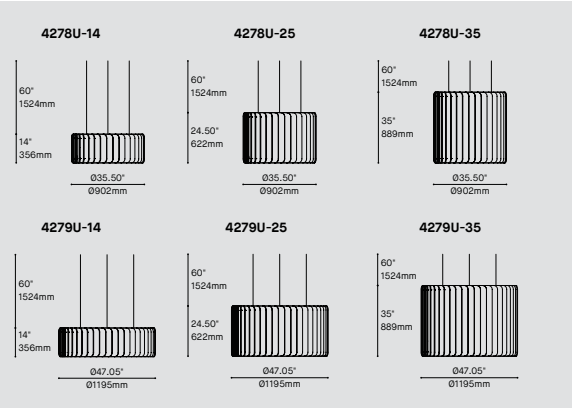

MILL 014" INDIRECT SUSPENDED

PROJECTPROJET

SPECTYPE

NOTES




SHADE FINISHFINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONSOPTIONS DE MONTAGE



QUICKSHIP CLICK HERE / CLIQUEZ ICI					
ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE				CODE	
MODEL MODÈLE					
42771-14	MILL INDIRECT (Ø14" X 14")				
42771-25	MILL INDIRECT (Ø14" X 25")				
42771-35	MILL INDIRECT (Ø14" X 35")				
LIGHT SOURCE SOURCE LUMINEUSE					
LED.REG	REGULAR OUTPUT INDIRECT				
LED.HO	HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)				90	
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).					
* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS					
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
MOUNTING MONTAGE		RC1			
RC1	ROUND CANOPY / PAVILLON ROND				
	SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		RCC			
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
ACCESSORY ACCESSOIRE					
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING					
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK				
39NLWA*	NLIGHT WIRED REMOTE POWER PACK				
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .					

MILL 036" & 047 INDIRECT SUSPENDED

PROJECTPROJET

SPECTYPE

NOTES



SHADE FINISHFINI ABAT-JOUR




ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONSOPTIONS DE MONTAGE



ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL		MODÈLE			
42781-14	MILL INDIRECT (Ø36" X 14")				
42781-25	MILL INDIRECT (Ø36" X 25")				
42781-35	MILL INDIRECT (Ø36" X 35")				
42791-14	MILL INDIRECT (Ø47" X 14")				
42791-25	MILL INDIRECT (Ø47" X 25")				
42791-35	MILL INDIRECT (Ø47" X 35")				
LIGHT SOURCE		SOURCE LUMINEUSE			
LED.REG	REGULAR OUTPUT INDIRECT				
LED.HO	HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR			
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)		90	
90	90+ CRI				
VOLTAGE		VOLTAGE			
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION		OPTION DE CONTRÔLE			
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).					
* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS					
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
CABLE		CÂBLE		AC	
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE				
CABLE LENGTH		LONGUEUR DE CÂBLE			
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
MOUNTING		MONTAGE		RC1	
RC1	ROUND CANOPY / PAVILLON ROND				
	SCREWLESS CANOPY 04.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION		OPTION DE MONTAGE DE CÂBLE		RCC	
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
CANOPY FINISH		FINI PAVILLON			
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH		FINI CÂBLE D'ALIMENTATION			
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH		FINI ABAT-JOUR			
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
DIFFUSER FINISH		FINI DIFFUSEUR		WH	
WH	WHITE				
ACCESSORY		ACCESSOIRE			
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING					
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK				
39NLWA*	NLIGHT WIRED REMOTE POWER PACK				
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .					

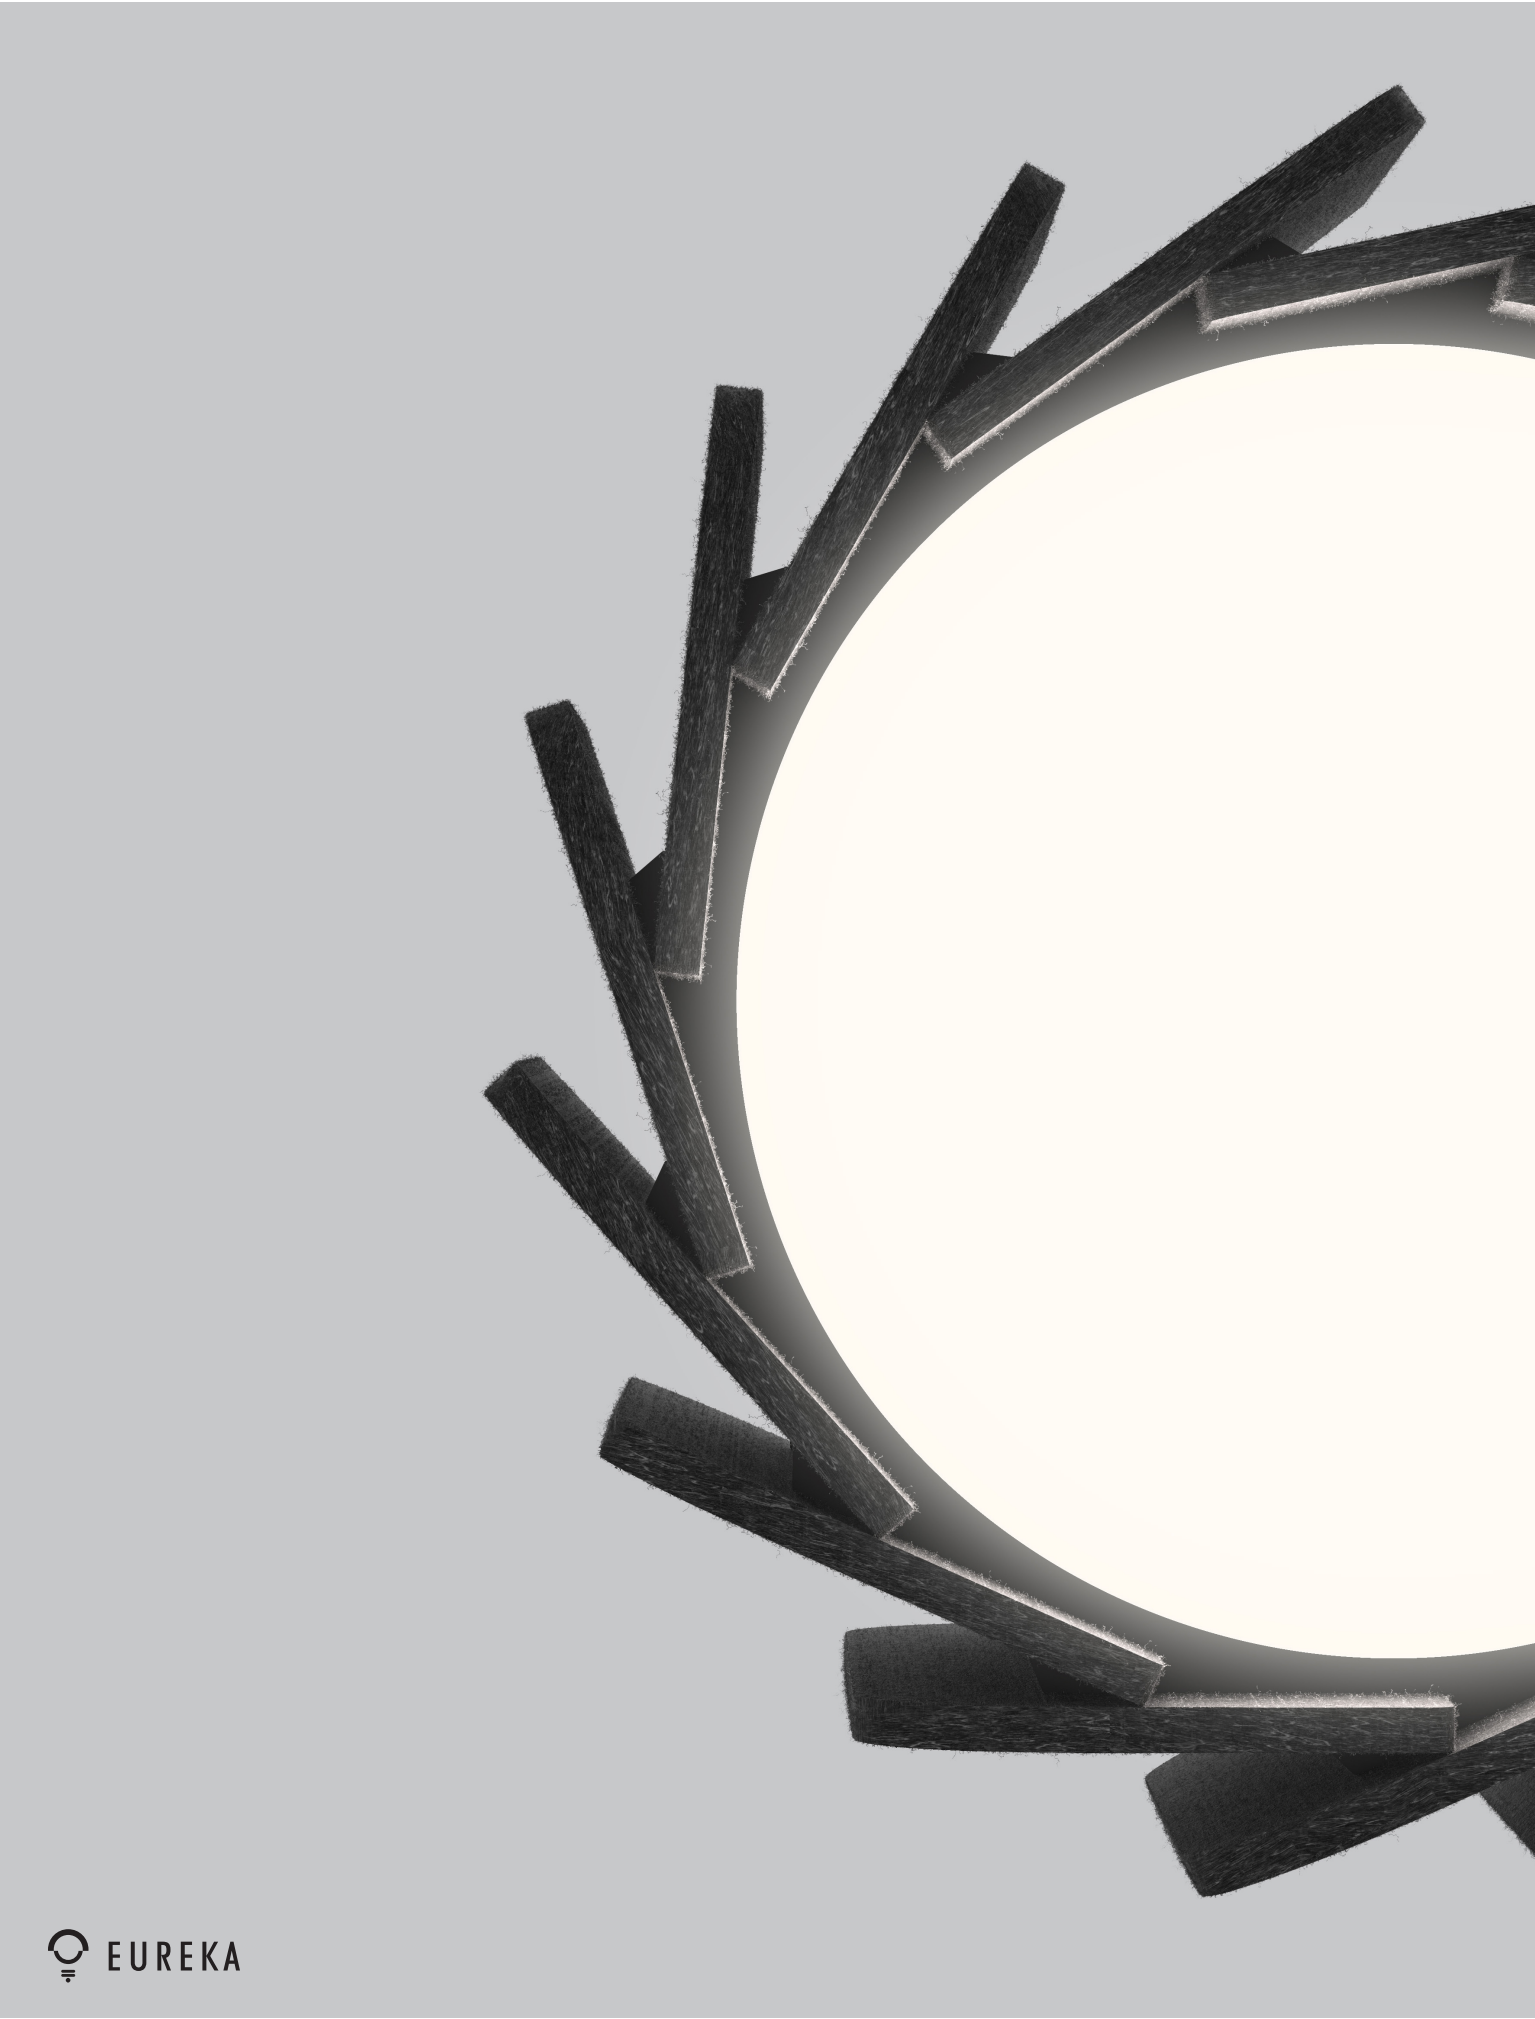

PHOTOMETRIC REPORT

MILL 4277/4577 (Ø14")

Direct LED.LO

CCT (K):	4000
Delivered Lumens (lm):	884
System wattage (W):	14.4
Distribution:	Direct
Delivered Efficacy (lm/W):	61

Direct LED

CCT (K):	4000
Delivered Lumens (lm):	1732
System wattage (W):	31.8
Distribution:	Direct
Delivered Efficacy (lm/W):	54

Direct LED.HO


CCT (K):	4000
Delivered Lumens (lm):	2626
System wattage (W):	50
Distribution:	Direct
Delivered Efficacy (lm/W):	52

Indirect LED

CCT (K):	4000
Delivered Lumens (lm):	987
System wattage (W):	14.4
Distribution:	Indirect
Delivered Efficacy (lm/W):	68



Indirect LED.HO

CCT (K):	4000
Delivered Lumens (lm):	1342
System wattage (W):	20.6
Distribution:	Indirect
Delivered Efficacy (lm/W):	65



*For Silvergray version.
**System wattage include driver and LED module consumption

*LEDHO (High Output) photometric distributions below.

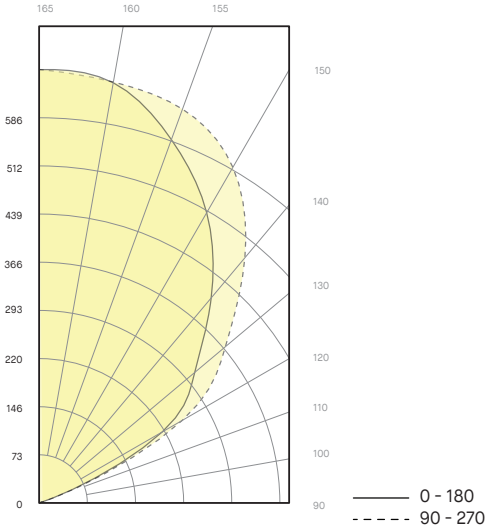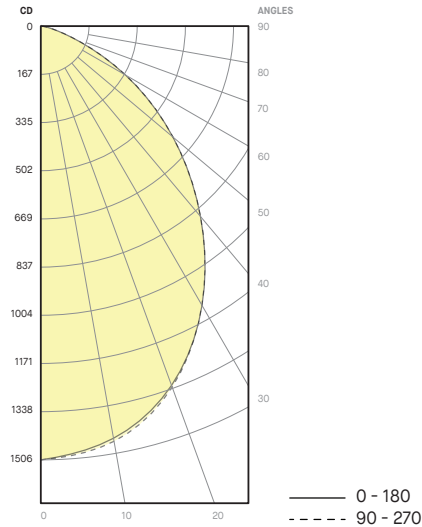

PHOTOMETRIC REPORT

MILL 4x78

4x78D-LEDLO

CCT (K):	4000
Delivered Lumens (lm):	3955
System wattage (W):	56
Distribution:	Direct
Delivered Efficacy (lm/W):	71

4x78D-LED

CCT (K):	4000
Delivered Lumens (lm):	5390
System wattage (W):	82
Distribution:	Direct
Delivered Efficacy (lm/W):	66

4x78D-LEDHO


CCT (K):	4000
Delivered Lumens (lm):	7424
System wattage (W):	121
Distribution:	Direct
Delivered Efficacy (lm/W):	61

4x7xI-LED



CCT (K):	4000
Delivered Lumens (lm):	1408
System wattage (W):	19
Distribution:	Direct
Delivered Efficacy (lm/W):	74

4x7xI-LEDHO

CCT (K):	4000
Delivered Lumens (lm):	2051
System wattage (W):	29
Distribution:	Direct
Delivered Efficacy (lm/W):	71



*LEDHO (High Output) photometric distributions below.

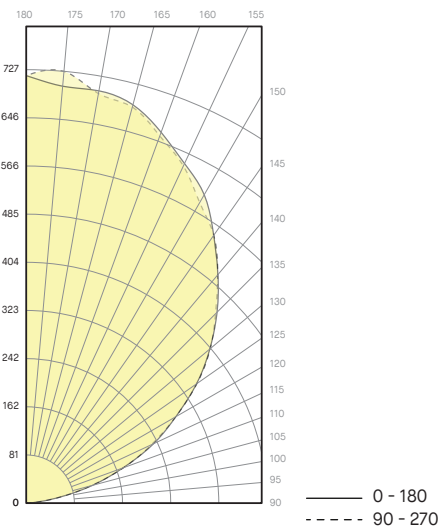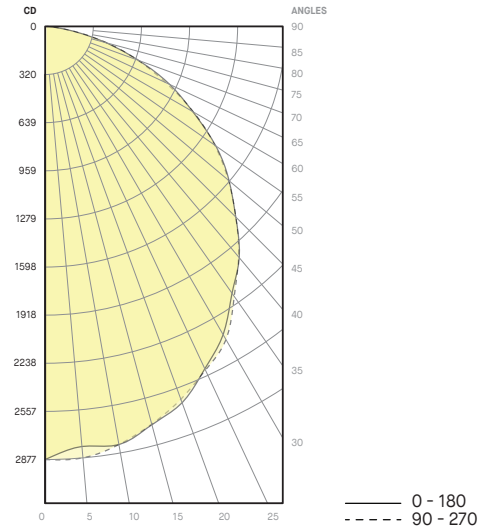

PHOTOMETRIC REPORT

MILL 4x79

4x79D-LEDLO

CCT (K):	4000
Delivered Lumens (lm):	8784
System wattage (W):	128
Distribution:	Direct
Delivered Efficacy (lm/W):	69

4x79D-LED

CCT (K):	4000
Delivered Lumens (lm):	11971
System wattage (W):	185
Distribution:	Direct
Delivered Efficacy (lm/W):	65

4x79D-LEDHO


CCT (K):	4000
Delivered Lumens (lm):	16489
System wattage (W):	276
Distribution:	Direct
Delivered Efficacy (lm/W):	60

4x7xI-LED

CCT (K):	4000
Delivered Lumens (lm):	1408
System wattage (W):	19
Distribution:	Direct
Delivered Efficacy (lm/W):	74

4x7xI-LEDHO

CCT (K):	4000
Delivered Lumens (lm):	2051
System wattage (W):	29
Distribution:	Direct
Delivered Efficacy (lm/W):	71



*LEDHO (High Output) photometric distributions below.

