






Sail's original form made of a single piece of folded metal creates a sense of weightlessness.

Create an impactful lighting arrangement by clustering multiple luminaires at varying heights and angles. Four aircraft cables on each pendant make it easy to adjust.


TECHNICAL DATA

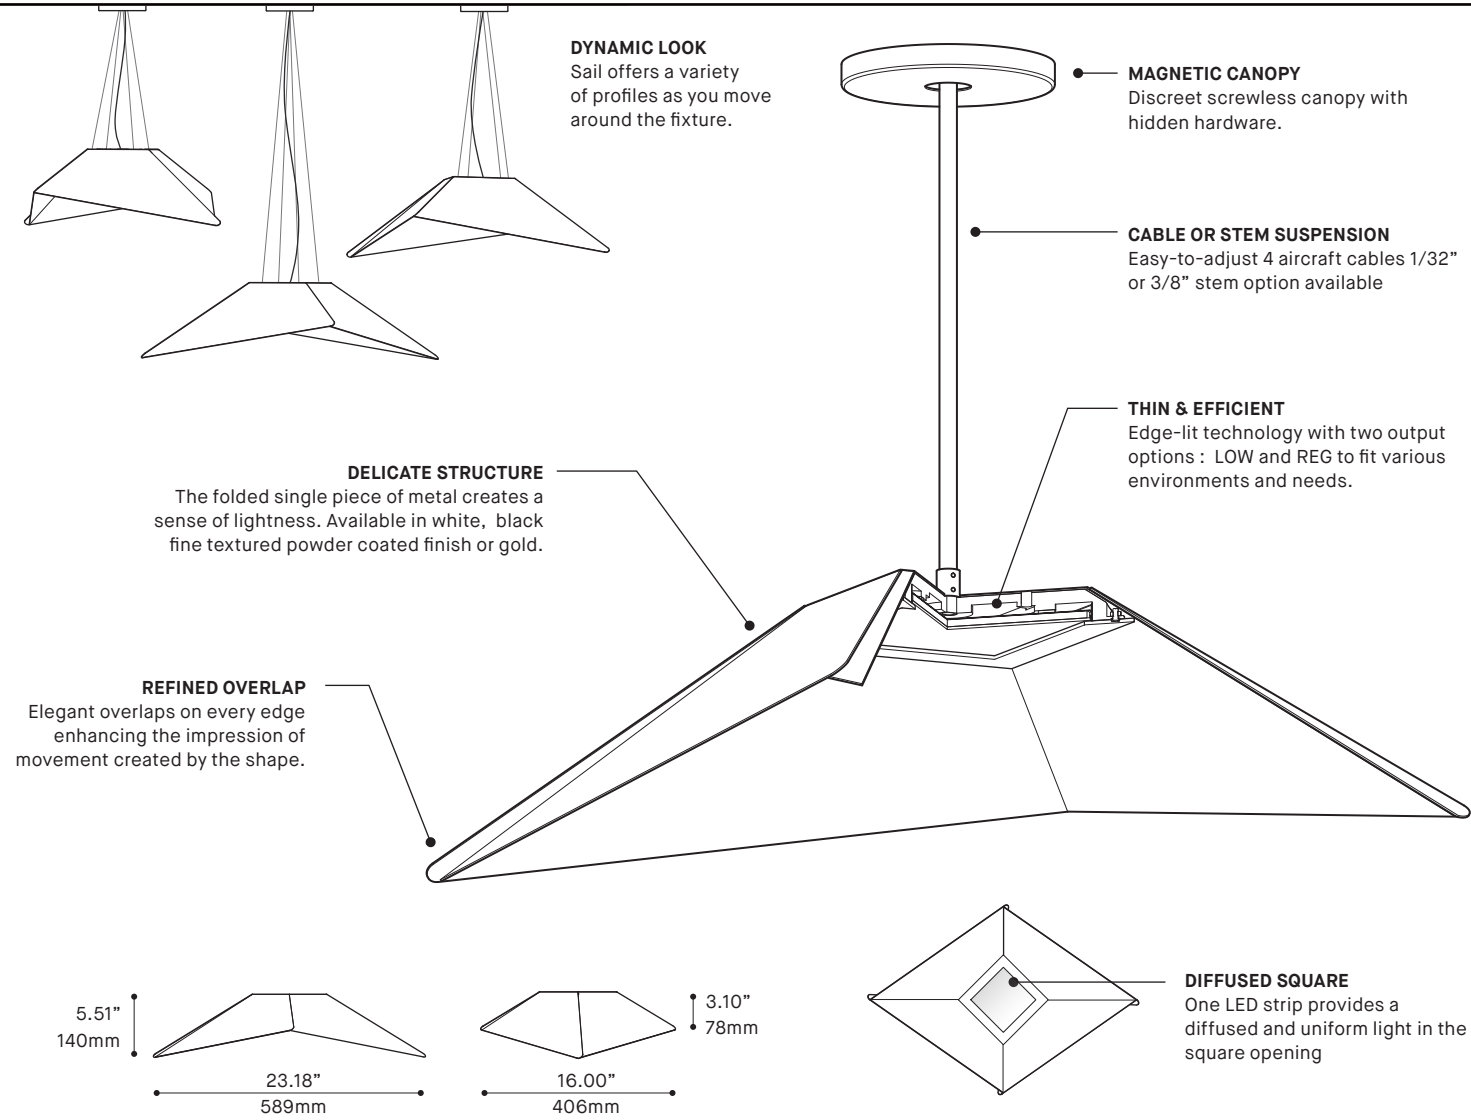

PRODUCT SPECIFICATION	LOW-BLKE	LOW-GOL	LOW-WHE	REG-BLKE	REG-GOL	REG-WHE
PERFORMANCE						
SYSTEM WATTAGE	6 W	6 W	6 W	12 W	12 W	12 W
DELIVERED LUMENS (4000K)	333 LM	394 LM	637 LM	645 LM	762 LM	1232 LM
EFFICACY	56 LM/W	65.6 LM/W	106 LM/W	54 LM/W	63.5 LM/W	103 LM/W
OTHER INFORMATION						
LUMINAIRE'S WEIGHT	5.1 LBS / 2.3 KG	5.1 LBS / 2.3 KG	5.1 LBS / 2.3 KG	5.1 LBS / 2.3 KG	5.1 LBS / 2.3 KG	5.1 LBS / 2.3 KG
L70 (LUMEN MAINTENANCE)	60,000	60,000	60,000	60,000	60,000	60,000
WELL & LEED STANDARD REQUIREMENTS						
MAX. LUMINANCE 45°-90° OF NADIR	< 6000 CD/M ²					
LIGHT QUALITY	R9 > 50 (WITH 4000K)					
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24					

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	N/A
80+	3500K	N/A
80+	3000K	N/A
80+	2700K	N/A
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77





SAIL 4265-24

PROJECT PROJET

SPEC TYPE

NOTES



FINISH FINI




BLKE WHE GOL



OVERALL HEIGHT HAUTEUR HORS TOUT

	LED 0.50" CANOPY
MOUNTING	RC1
CABLE	65.51"
STEM	41.51"

MOUNTING OPTIONS OPTIONS DE MONTAGE

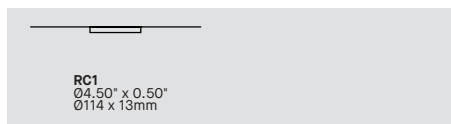

STEM OR CABLE OPTION OPTIONS DE TIGE OU CÂBLE

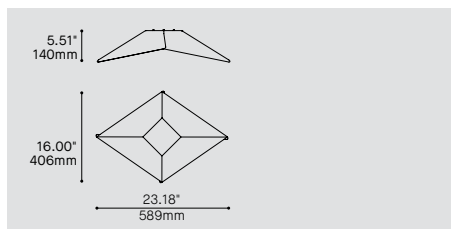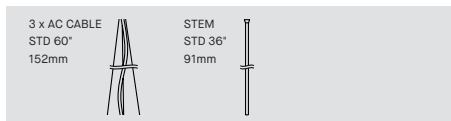

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE 4265-24

LIGHT SOURCE SOURCE LUMINEUSE

LED.LO LOW OUTPUT
LED REGULAR OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27 2700K
30 3000K
35 3500K
40* 4000K
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC) 90

90 90+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL
* NLIGHT INTEGRATION REQUIRES A REMOTE CONTROLLER (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.
* EMERGENCY BATTERY, CONTACT YOUR EUREKA REPRESENTATIVE

EMERGENCY BATTERY BATTERIE D'URGENCE

EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.
EMB* EMERGENCY BATTERY FOR REMOTE BOX
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION

STEM OR CABLE TIGE OU CÂBLE

AC AIRCRAFT MOUNTING & BLACK, WHITE OR CLEAR CABLE, FIELD ADJUSTABLE
S10 BLACK, WHITE OR GOLD 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CÂBLE

36 36" STEM (STD LENGTH)
60 60" CABLE (STD LENGTH)
** CUSTOM STEM OR CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC1 ROUND CANOPY / PAVILLON ROND
SCREWLESS 0.5" CANOPY (2471C)
* 3983 ACCESSORY PROVIDED

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE
GOL GOLD
RAL* PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

POWER CORD OR STEM FINISH FINI CÂBLE D'ALIMENTATION OU TIGE

BLK BLACK POWER CORD OR STEM
WH WHITE POWER CORD OR STEM
CLR CLEAR POWER CORD
GOL GOLD STEM
RAL* PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

SHADE FINISH FINI ABAT-JOUR

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE
GOL GOLD
RAL* PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING
3983 DEEP JUNCTION BOX (PROVIDED)
39NLAA NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA NLIGHT WIRED REMOTE CONTROLLER
EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE
3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



Sail is provided with a stem mounting option offering an elegant solution for low ceiling spaces.





PHOTOMETRIC REPORT

SAIL 4265-24



4265-24-LED.40.LOW-WHE

CCT (K):	4000
Delivered Lumens (lm):	637
System wattage (W)*:	6
Distribution:	Direct
Delivered Efficacy (lm/W):	106
Photometric type	C

4265-24-LED.40.REG-WHE

CCT (K):	4000
Delivered Lumens (lm):	1232
System wattage (W)*:	12
Distribution:	Direct
Delivered Efficacy (lm/W):	103
Photometric type	C

*System wattage includes driver and LED module consumption

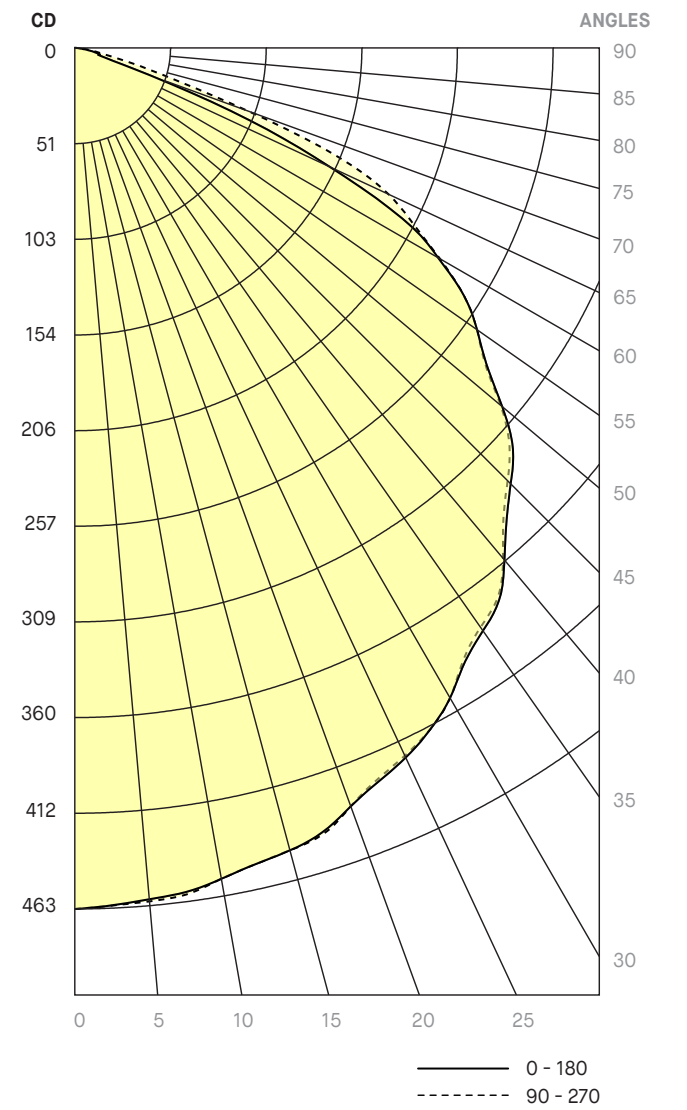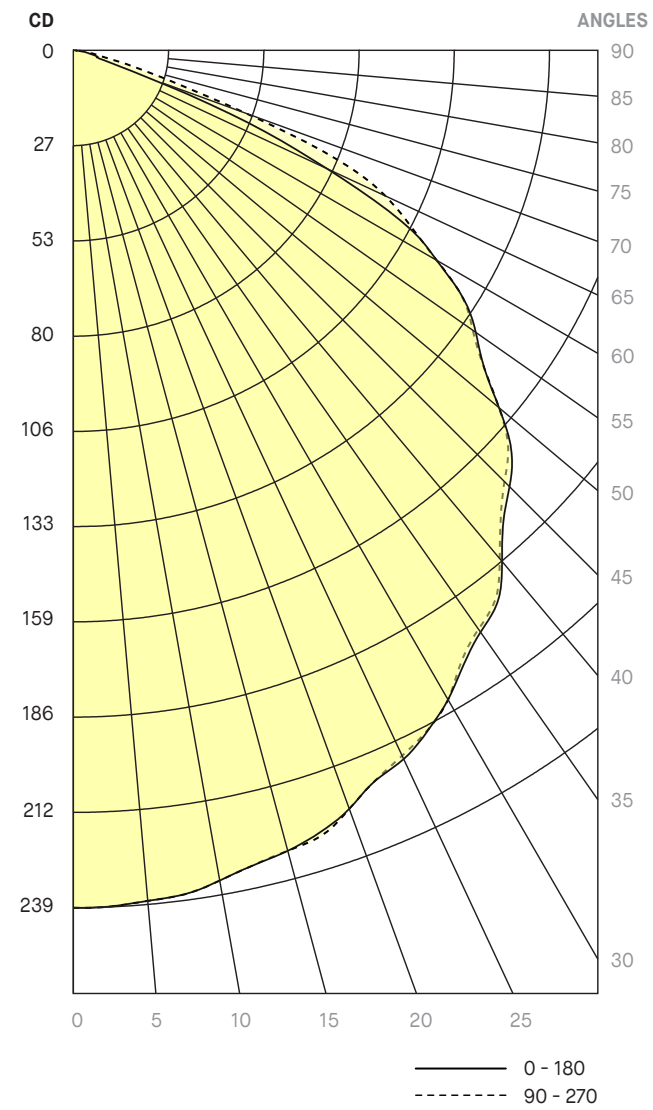

PHOTOMETRIC REPORT

SAIL 4265-24



4265-24-LED.40.LOW-GOL

CCT (K): 4000
 Delivered Lumens (lm): 394
 System wattage (W)*: 6
 Distribution: Direct
 Delivered Efficacy (lm/W): 64
 Photometric type: C

4265-24-LED.40.REG-GOL

CCT (K): 4000
 Delivered Lumens (lm): 762
 System wattage (W)*: 12
 Distribution: Direct
 Delivered Efficacy (lm/W): 61
 Photometric type: C

*System wattage includes driver and LED module consumption

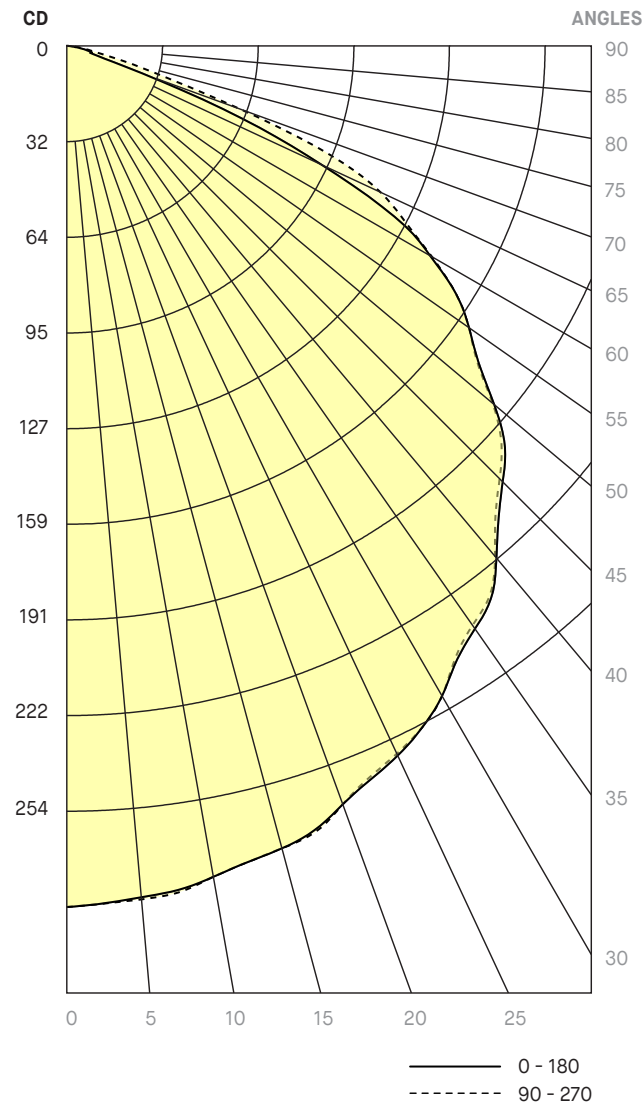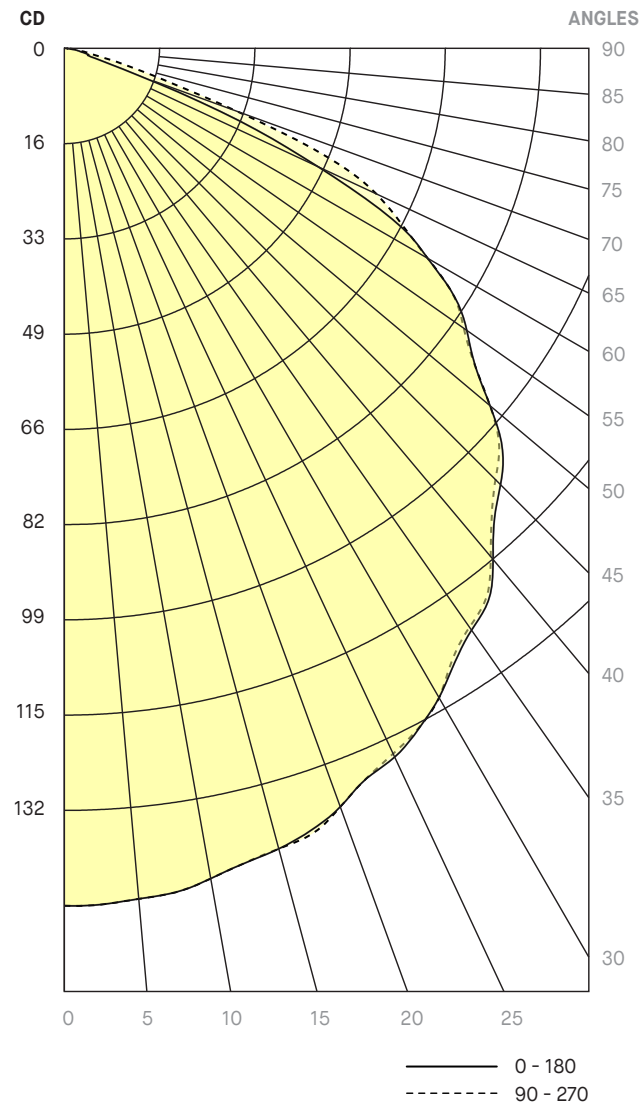


PHOTOMETRIC REPORT

SAIL 4265-24

4265-24-LED.40.LOW-BLKE

CCT (K): 4000
 Delivered Lumens (lm): 333
 System wattage (W)*: 6
 Distribution: Direct
 Delivered Efficacy (lm/W): 56
 Photometric type: C

*System wattage includes driver and LED module consumption

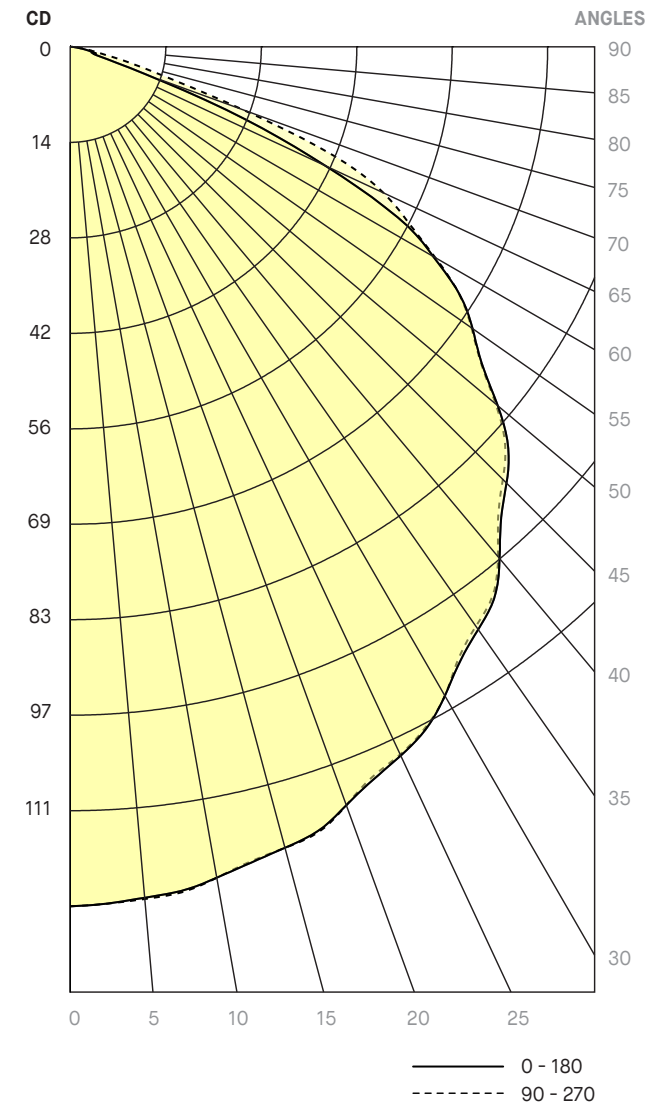

4265-24-LED.40.REG-BLKE

CCT (K): 4000
 Delivered Lumens (lm): 645
 System wattage (W)*: 12
 Distribution: Direct
 Delivered Efficacy (lm/W): 54
 Photometric type: C

