



Stella, a minimalist fixture, combines high output downlight with indirect ambient uplight.

The decorative, yet powerful pendant has clean, modern aesthetics.


Stella is intended for use in high ceiling and open areas where there is a value to illuminating the ceiling as well as the space below.



4272DI-9






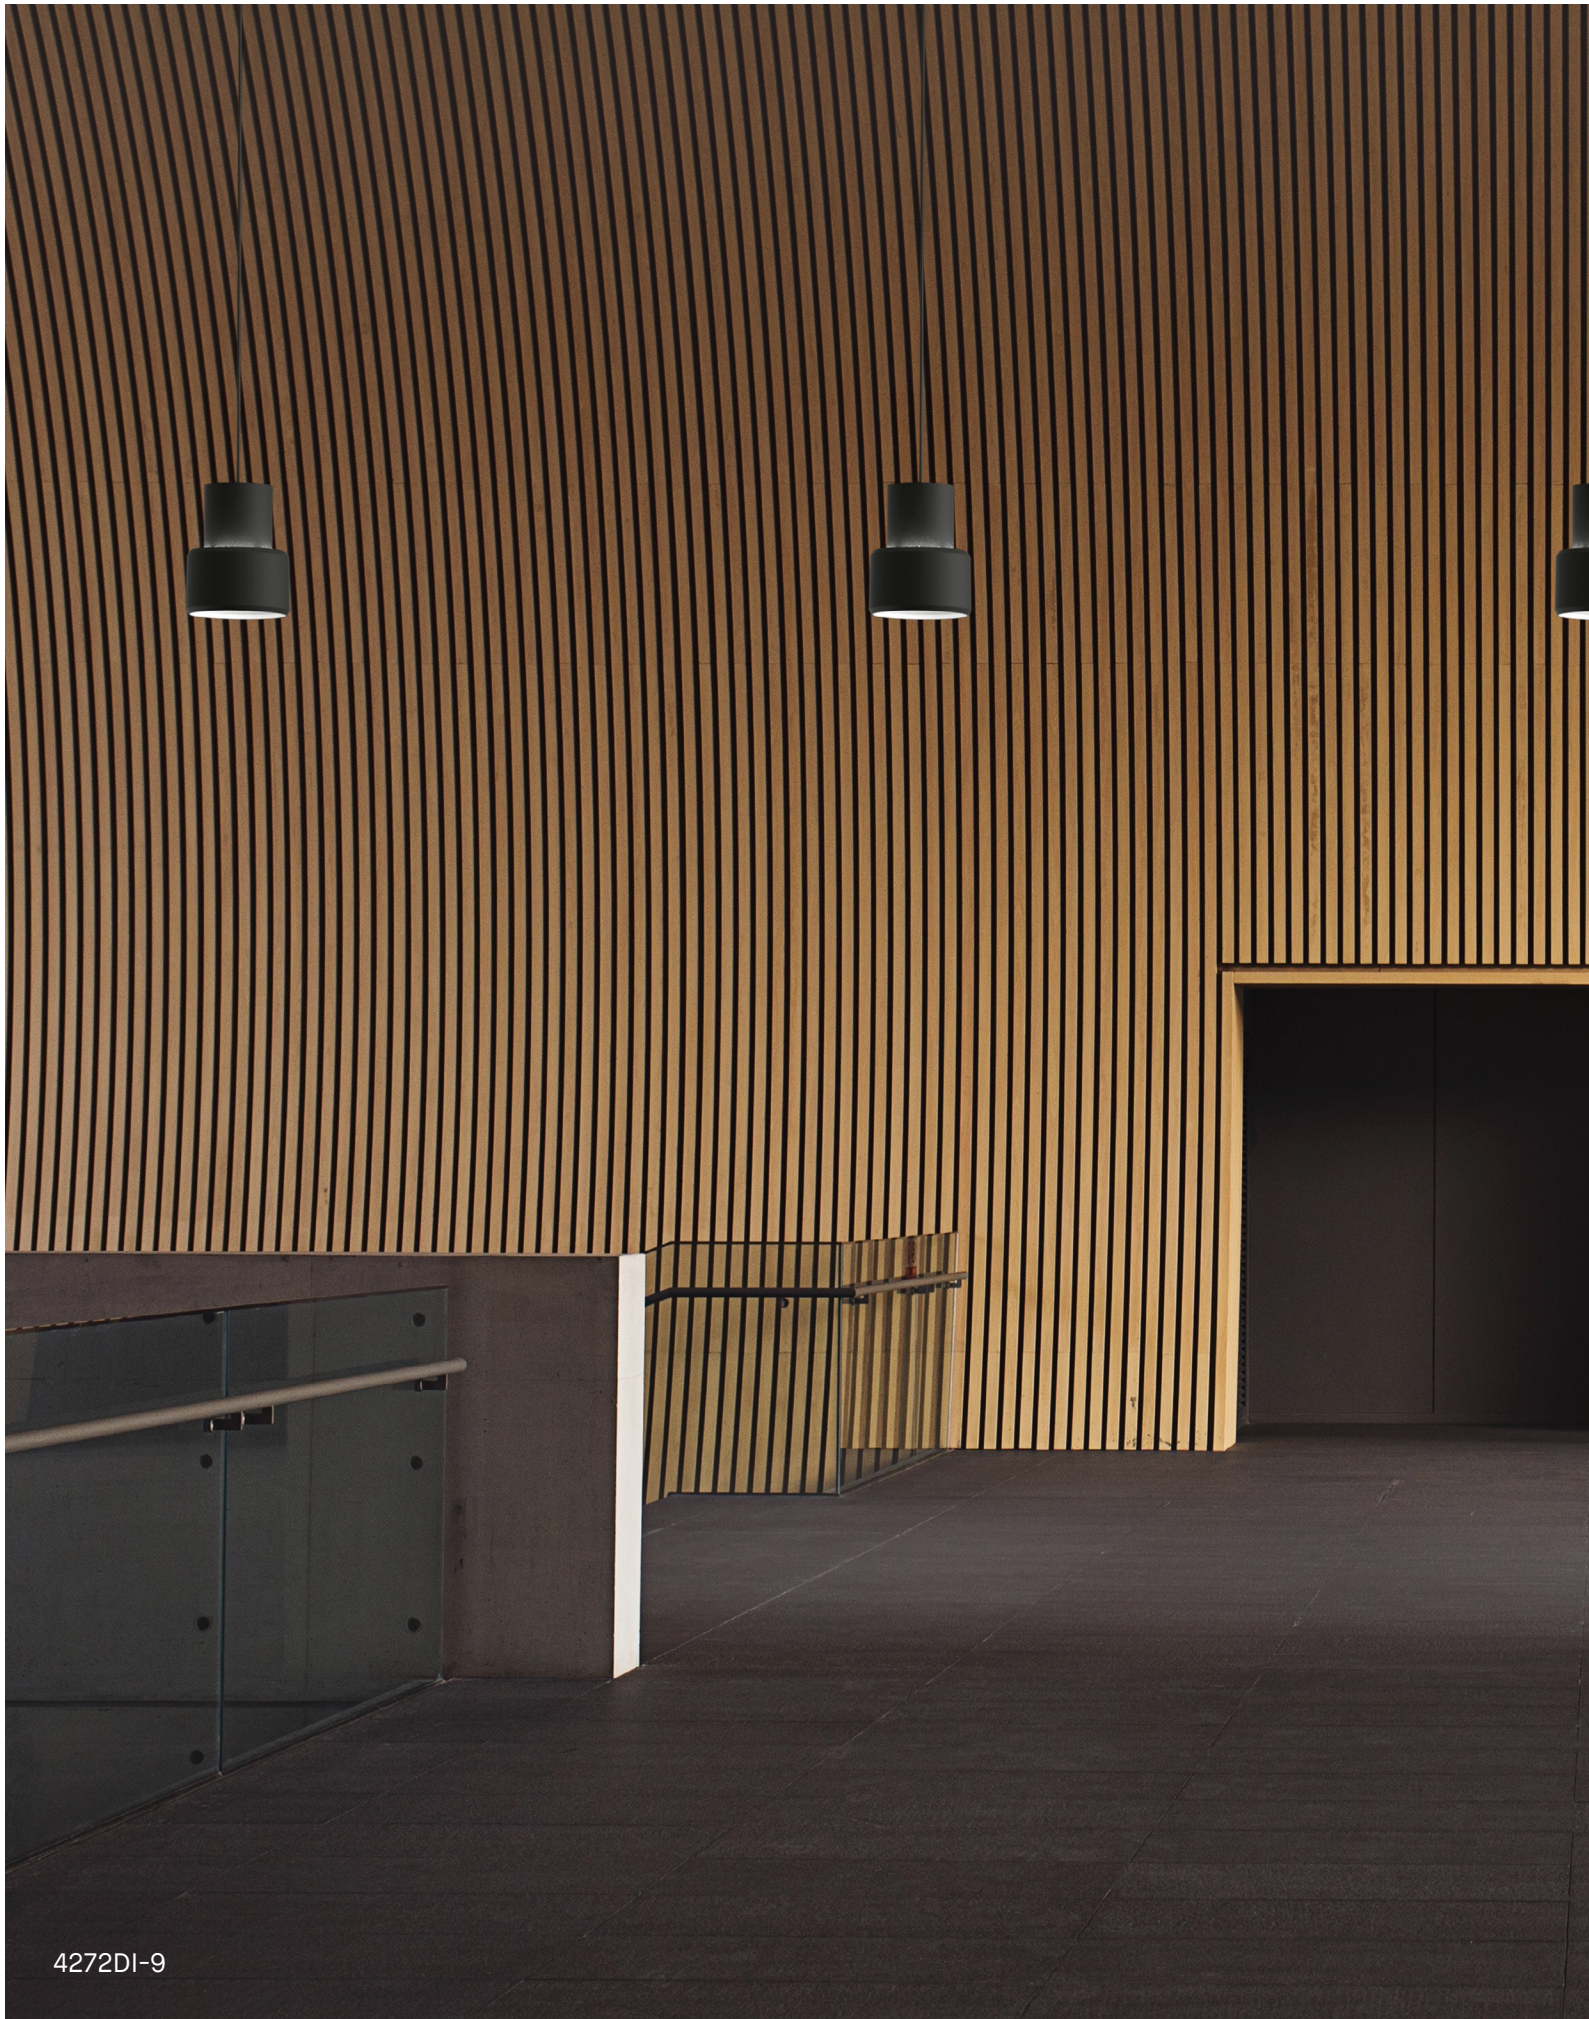

4272DI-9



TECHNICAL DATA

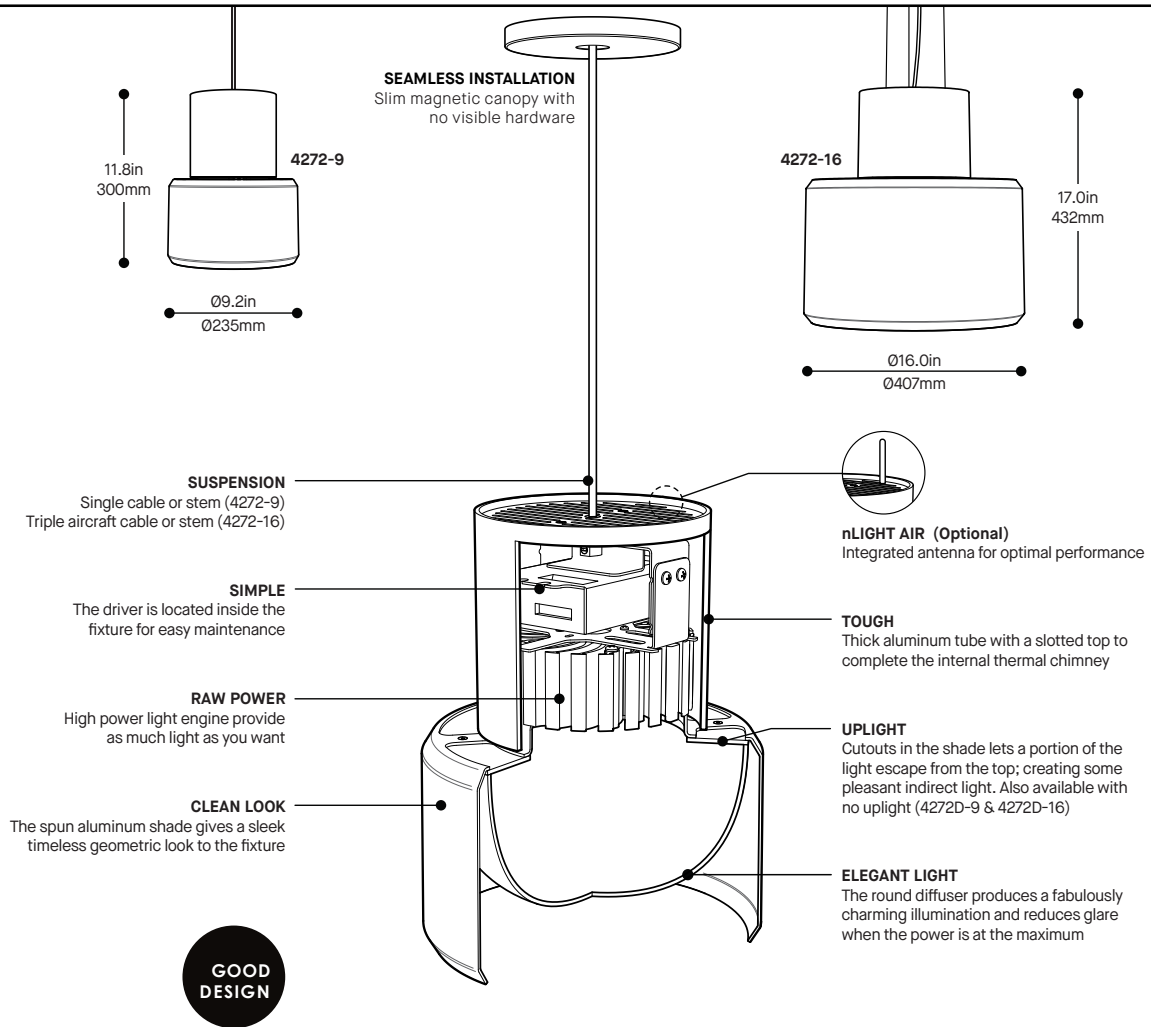


| PRODUCT SPECIFICATION | 4272DI-9 REG - HO | 4272DI-16 REG - HO | 4272D-9 REG - HO | 4272D-16 REG - HO |
|--|---|----------------------------|-----------------------------|----------------------------|
| PERFORMANCE | | | | |
| SYSTEM WATTAGE | 28.6W - 51W | 34.8W - 68.9W | 28.6W - 51W | 34.8W - 68.9W |
| DELIVERED DIRECT LUMENS (4000K) | 1750LM - 3060LM | 2230LM - 3860LM | 2050LM - 3560LM | 2620LM - 4550LM |
| DELIVERED INDIRECT LUMENS (4000K) | 500LM - 860LM | 770LM - 1340LM | - | - |
| EFFICACY | 78.8LM/W | 86.2LM/W | 71.7LM/W | 75.3LM/W |
| OTHER INFORMATIONS | | | | |
| WEIGHT | 7.3LBS / 3.3KG | 9.8LBS / 4.4KG | 7.3LBS / 3.3KG | 9.8LBS / 4.4KG |
| L70 (LUMEN MA INTENANCE) | > 63 600 HRS | > 55 000 HRS | > 63 600 HRS | > 55 000 HRS |
| WELL & LEED STANDARD REQUIREMENTS | | | | |
| MAX. LUMINANCE 45°-90° OF NADIR | 5401(REG) CD/M ² | 4398(HO) CD/M ² | 5401(REG) CD/M ² | 4398(HO) CD/M ² |
| LIGHT QUALITY | R9 > 50 (90 CRI OPTION) | | | |
| FLICKERING TOLERANCE | LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24 | | | |

EFFICACY MULTIPLIERS

| CRI | CCT | FACTOR |
|-----|-------|--------|
| 80+ | 4000K | 1.00 |
| 80+ | 3500K | 0.99 |
| 80+ | 3000K | 0.97 |
| 80+ | 2700K | 0.94 |
| 90+ | 4000K | 0.89 |
| 90+ | 3500K | 0.86 |
| 90+ | 3000K | 0.84 |
| 90+ | 2700K | 0.80 |

LIGHT DISTRIBUTION



Visit our website for warranty terms and conditions.



4272-16 & 4272-9

 EUREKA





4272DI-16

 EUREKA



STELLA 4272

| | |
|-----------|--------|
| PROJECT | PROJET |
| SPEC TYPE | |
| NOTES | |



FINISH FINI



BLKE



WHE

FAMILY FAMILLE



4272DI-9



4272DI-16



4273-14




4272D-9 DIRECT ONLY



4272D-16 DIRECT ONLY



4273-23

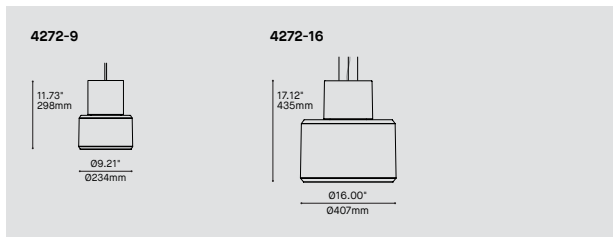

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

| | |
|-----------|------------------------------|
| 4272DI-9 | STELLA 9" (DIRECT+INDIRECT) |
| 4272DI-16 | STELLA 16" (DIRECT+INDIRECT) |
| 4272D-9 | STELLA 9" (DIRECT ONLY) |
| 4272D-16 | STELLA 16" (DIRECT ONLY) |

LIGHT SOURCE SOURCE LUMINEUSE

| | |
|--------|----------------|
| LED | REGULAR OUTPUT |
| LED.HO | HIGH OUTPUT |

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

| | |
|-----|-------|
| 27* | 2700K |
| 30 | 3000K |
| 35 | 3500K |
| 40 | 4000K |

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

| | |
|-----|---------|
| 80 | 80+ CRI |
| 90* | 90+ CRI |

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

| | |
|-------|----------|
| 120V | 120 VOLT |
| 277V | 277 VOLT |
| 347V* | 347 VOLT |

* 347V COMES WITH A 09.3" X 1.75" CANOPY

CONTROL OPTION OPTION DE CONTRÔLE*

| | |
|---------|---|
| DV | 0-10V DIMMING (120V-277V & 347V) |
| DP | PHASE DIMMING (120V ONLY) |
| NLTAIR2 | NLIGHT AIR CONTROL GEN 2 ^(A) |
| NLIGHT | NLIGHT WIRED CONTROL ^(B) |

^(A)NLIGHT AIR INTEGRATED INSIDE PRODUCT
^(B)REQUIRES REMOTE POWER PACK (39NLWA)
^(C)EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT
*REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH LED SOURCES 120-227V. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS. WITH DV DIMMING OPTION, AN ADDITIONAL POWER CABLE WILL DROP FROM CEILING NEXT TO MAIN CABLE.

| | |
|------|----------------------------------|
| EMB* | EMERGENCY BATTERY FOR REMOTE BOX |
|------|----------------------------------|

*3981EA ACCESSORY IS REQUIRED; ONLY AVAILABLE WITH CABLE

STEM OR CABLE TIGE OU CABLE

| | |
|-----|--|
| S10 | 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE |
| C | CABLE, FIELD ADJUSTABLE (FOR 4272-9 & 4272D-9) |
| AC | AIRCRAFT MOUNTING & CABLE, FIELD ADJUSTABLE (FOR 4272-16 & 4272D-16) |

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

| | |
|----|--------------------------------------|
| 36 | 36" STEM (STD LENGTH) |
| 60 | 60" CABLE (STD LENGTH) |
| ** | CUSTOM STEM LENGTH (PLEASE SPECIFY) |
| ** | CUSTOM CABLE LENGTH (PLEASE SPECIFY) |

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

CANOPY FINISH FINI PAVILLON

| | |
|------|--------------------|
| BLKE | BLACK FINE TEXTURE |
| WHE | WHITE FINE TEXTURE |

POWER CORD OR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE

| | |
|-----|--------------------------|
| BLK | BLACK POWER CORD OR STEM |
| WH | WHITE POWER CORD OR STEM |

SHADE FINISH FINI ABAT-JOUR^(A)

| | |
|--------------------|-------------------------|
| BLKE | BLACK FINE TEXTURE |
| WHE | WHITE FINE TEXTURE |
| RAL ^(B) | PLEASE SPECIFY RAL CODE |

^(A)SHADE INTERIOR IS ALWAYS WHITE
^(B) LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR

WH

| | |
|----|-------|
| WH | WHITE |
|----|-------|

ACCESSORY ACCESSOIRE

| | |
|---------|--|
| 39NLWA* | NLIGHT WIRED REMOTE CONTROLLER |
| 3981EA | ELECTRICAL BOX FOR EMB EMERGENCY BATTERY |

*FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

STELLA 4272-9

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES



FINISH FINI




BLKE



WHE

4272-9



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4272DI-9 STELLA

4272DI-9

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K

35 3500K

40 4000K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

80

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)

DP PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.

STEM OR CABLE TIGE OU CABLE

C CABLE, FIELD ADJUSTABLE

C

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

60 60" CABLE (STD LENGTH)

** CUSTOM CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

SHADE FINISH FINI ABAT-JOUR (A)(B)

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

(A) SHADE INTERIOR IS ALWAYS WHITE

(B) SHADE FINISH DICTATES THE CABLE COLOR

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE

WH

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **EMB** **IES** **LED**

DESIGN:

Stella, at its core, is a powerful light engine fused to a minimalist aluminum shell. A large diffusion dome hidden inside the shade create a uniform direct & indirect illumination. Also offered in a direct only configuration.

INSTALLATION:

Single cable or stem for a minimalist look.

LIGHT SOURCE:

A highly powerful COB type light source project a light, softened by a large polymer diffusion dome to create an illumination that is efficient & uniform. Some of the light is reflected upward by the dome; thus illuminating indirectly the ceiling. Many control options available.

SHADE:

The precision spun aluminum shade is optimized to reduce glare. White internal finish for optimal light reflection.

CERTIFIED:

c-CSA-us









Stella is also available in a direct light only version.
4272D-9



PHOTOMETRIC REPORT

STELLA 4272 & 4272D

4272DI-9 - LED REG



CCT (K): 4000
Delivered Lumens (lm): 2250
System wattage (W)*: 28.6
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 78.8
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 9.84 (250)

4272DI-9 - LED HO

CCT (K): 4000
Delivered Lumens (lm): 3920
System wattage (W)*: 51.0
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 76.9
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 9.84 (250)

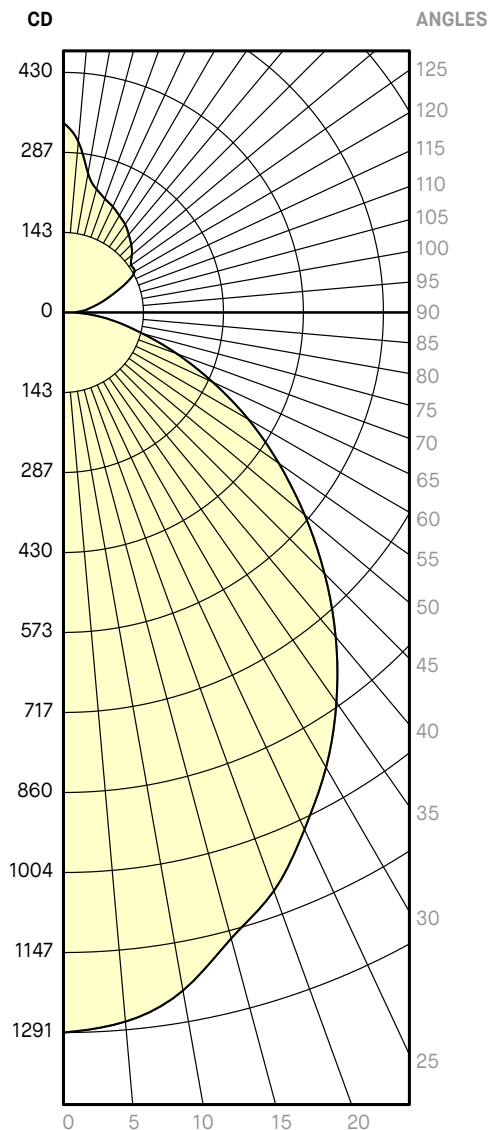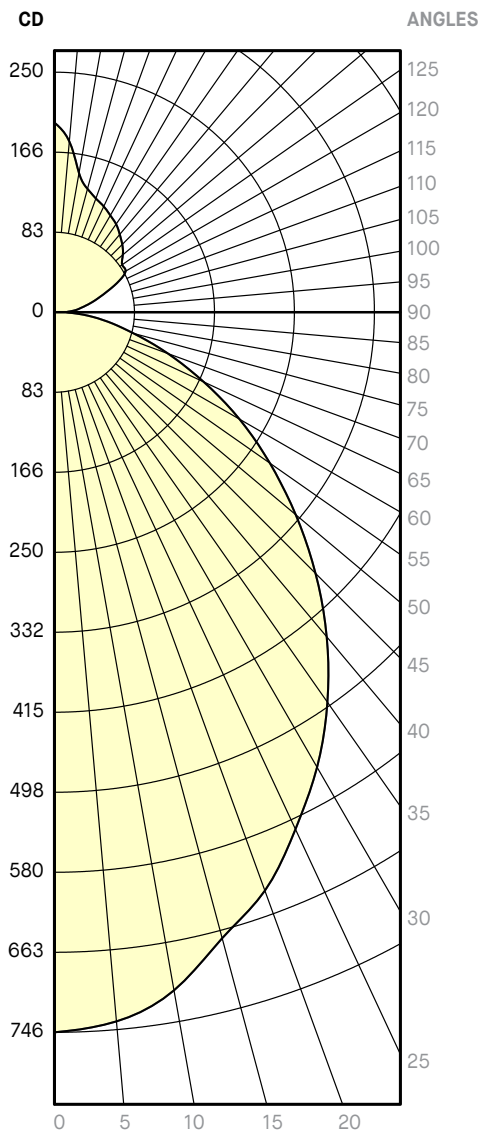

4272D-9 - LED REG



CCT (K): 4000
Delivered Lumens (lm): 2050
System wattage (W)*: 28.6
Distribution: Direct
Delivered Efficacy (lm/W): 71.7
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 9.84 (250)

4272D-9 - LED HO

CCT (K): 4000
Delivered Lumens (lm): 3560
System wattage (W)*: 51.0
Distribution: Direct
Delivered Efficacy (lm/W): 69.8
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 9.84 (250)

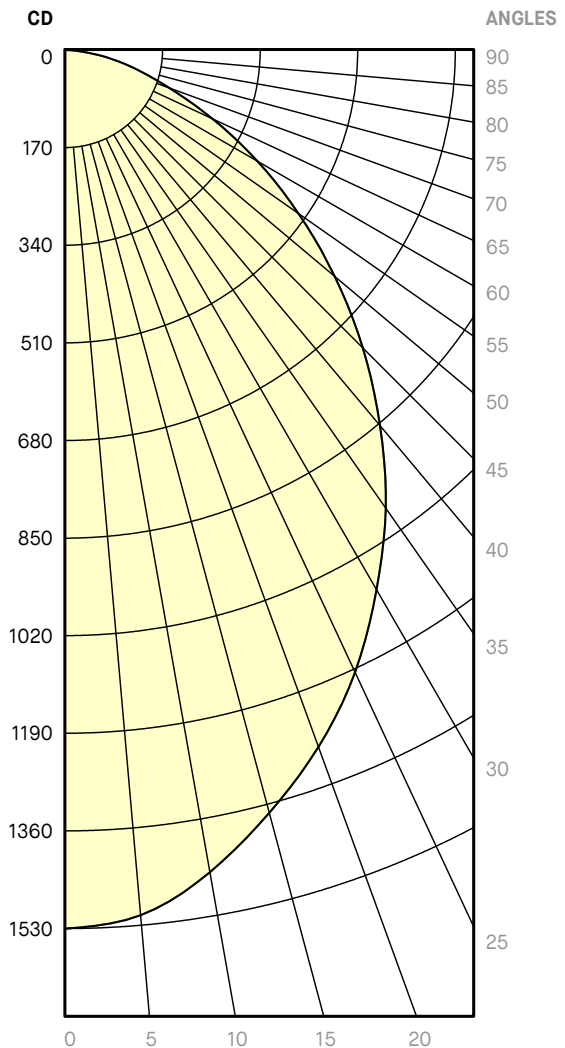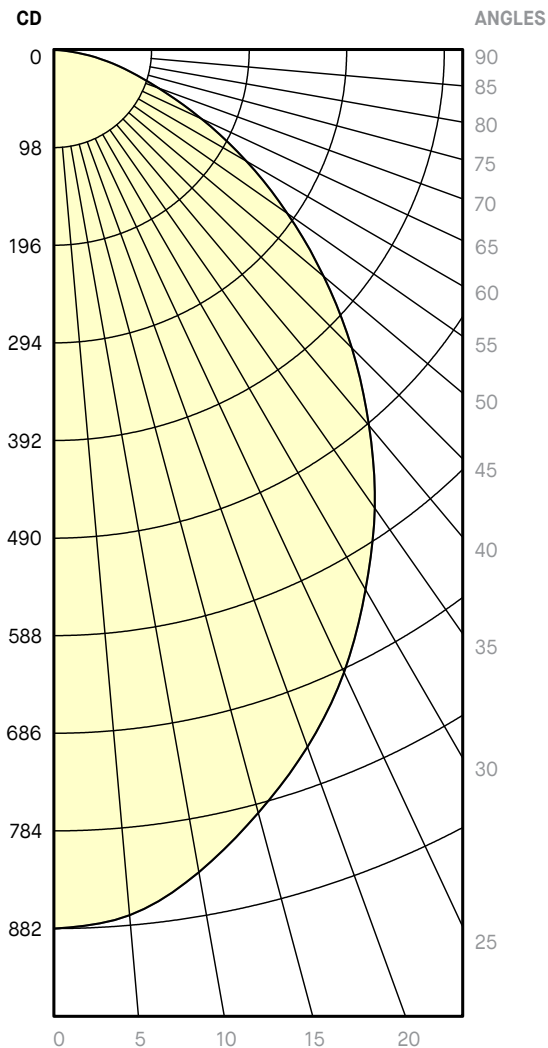

PHOTOMETRIC REPORT

STELLA 4272 & 4272D

4272DI-16 - LED REG



CCT (K): 4000
Delivered Lumens (lm): 3000
System wattage (W)*: 34.8
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 86.2
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 15.75 (400)

4272DI-16 - LED HO

CCT (K): 4000
Delivered Lumens (lm): 5200
System wattage (W)*: 68.9
Distribution: Direct/Indirect
Delivered Efficacy (lm/W): 75.5
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 15.75 (400)

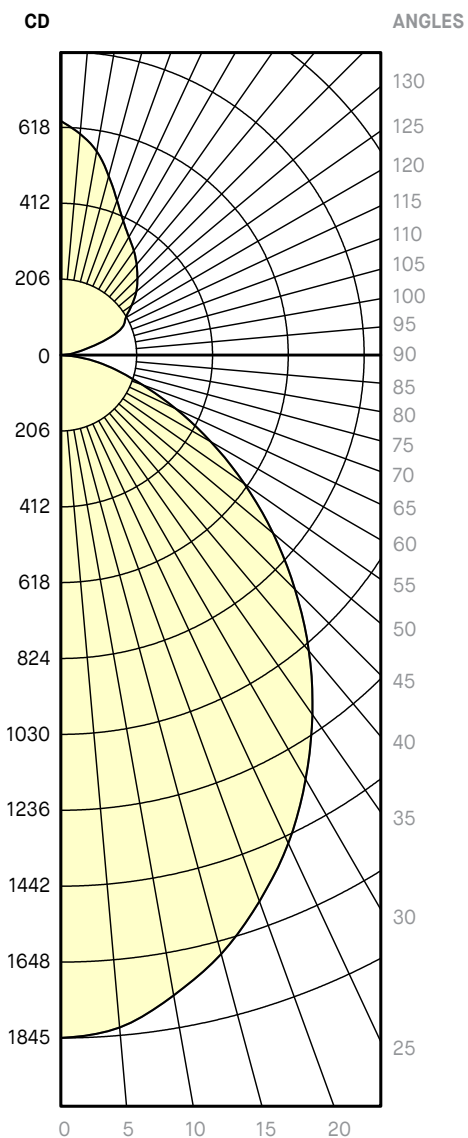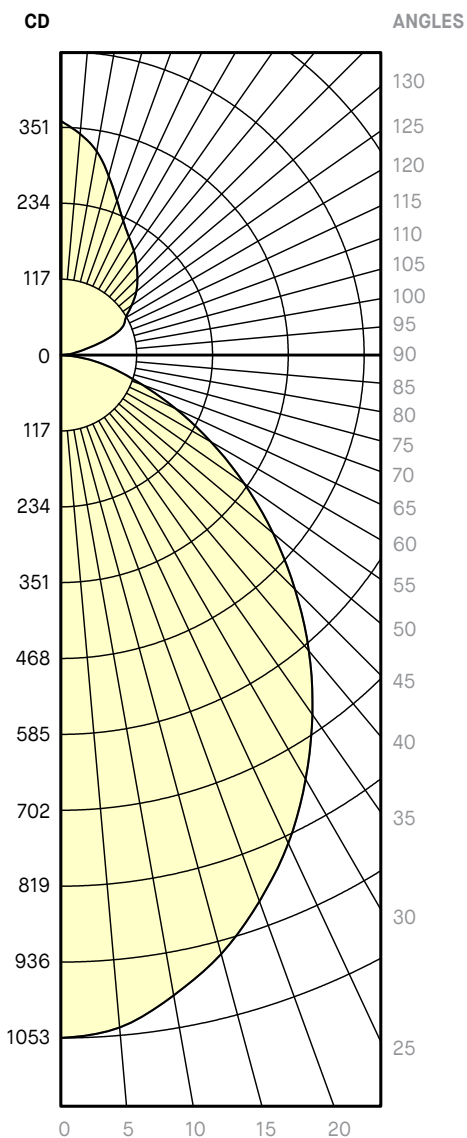

4272D-16 - LED REG

CCT (K): 4000
Delivered Lumens (lm): 2620
System wattage (W)*: 34.8
Distribution: Direct
Delivered Efficacy (lm/W): 75.3
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 15.75 (400)

4272D-16 - LED HO

CCT (K): 4000
Delivered Lumens (lm): 4550
System wattage (W)*: 68.9
Distribution: Direct
Delivered Efficacy (lm/W): 66.0
Photometric type: C

Luminous dimensions
Luminous shape: Sphere
Units: in (mm)
0-360 Axis: 15.75 (400)

