



# PHOTOMETRIC REPORT

EMPRESS

## 3035-35 LED & 4235-35 LED

CCT (K):	3500
Delivered Lumens (lm):	1752
System wattage (W)*:	79.6
Distribution:	Semi-Direct
Delivered Efficacy (lm/W):	22
Photometric type	C

\*System wattage include driver and LED module consumption

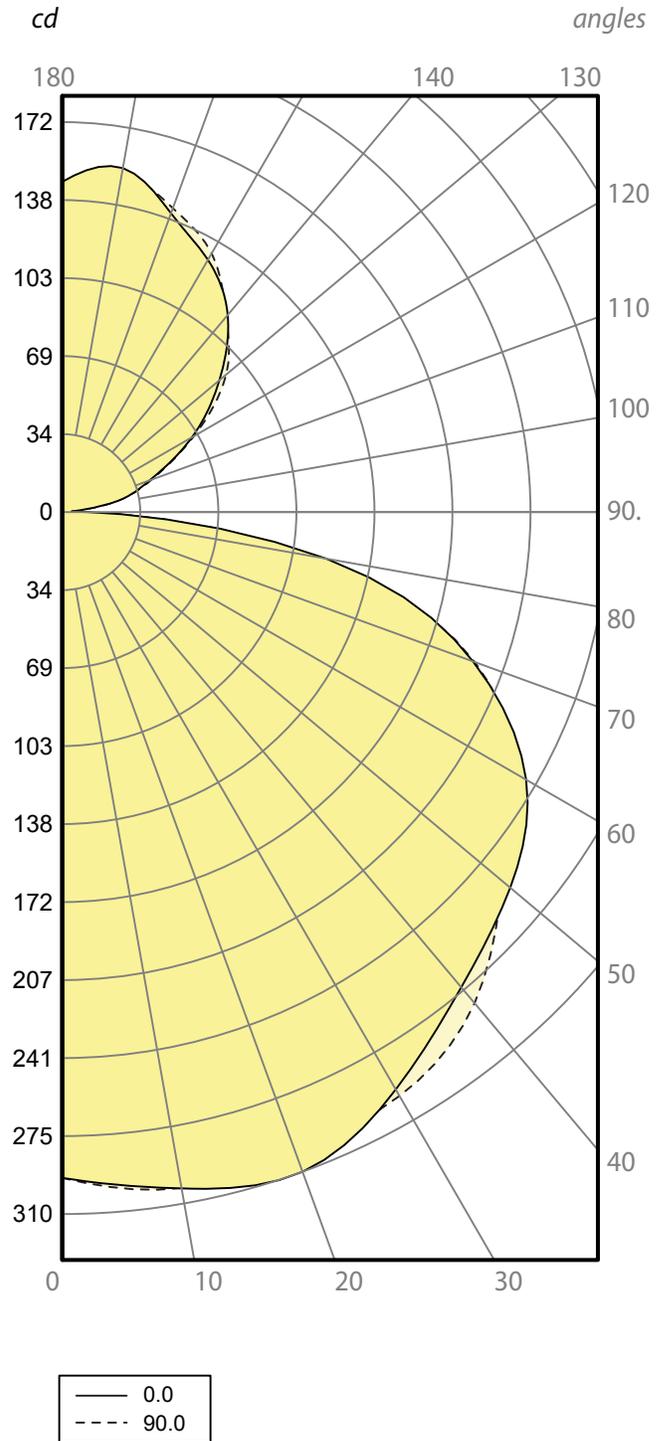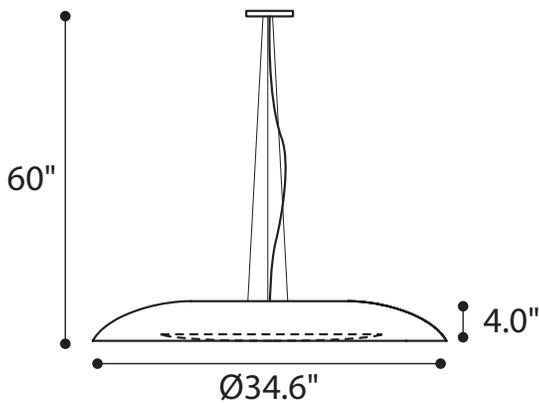

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



225 de Liège Ouest, Suite #200  
 Montréal (QC), Canada H2P 1H4  
 Tel : 514.385.3515 Fax : 514.385.4169  
 www.eurekalighting.com

3035-35  
 4235-35