

PHOTOMETRIC REPORT

OSLO

3038-29 LED & 4238-29 LED

SGF


CHF

CCT (K): 4000
Delivered Lumens (lm): 903
System wattage (W)*: 31
Distribution: Direct
Delivered Efficacy (lm/W): 29
Photometric type: C



4000
731
31
Direct
23
C

*System wattage include driver and LED module consumption

3038-29 LED & 4238-29 LED SGF

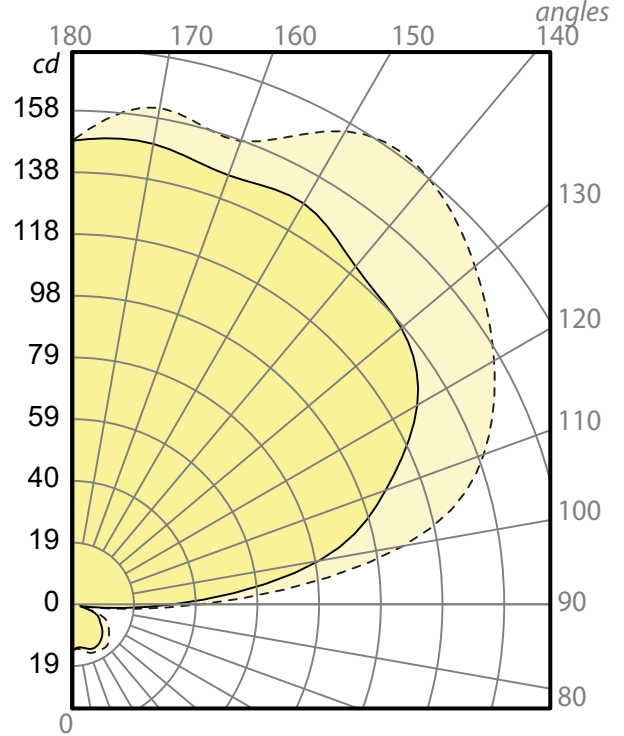

3038-29 LED & 4238-29 LED CHF

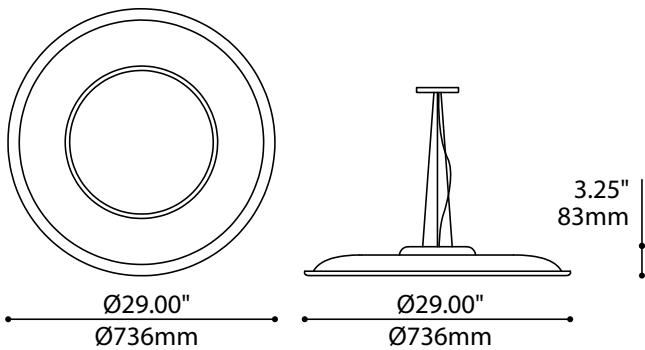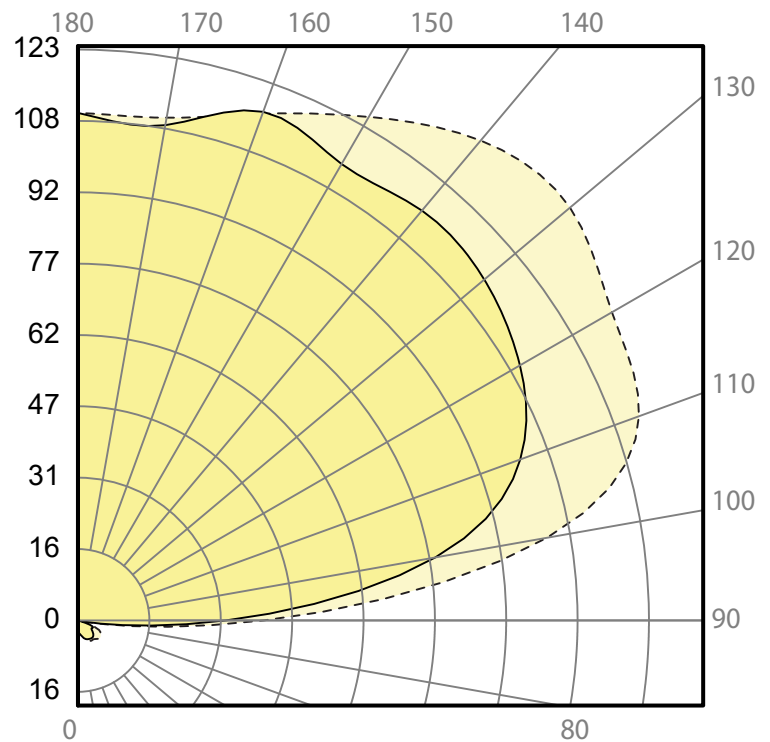

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



3038-29
4238-29