

# PHOTOMETRIC REPORT

MINI-OSLO

## 3038-19 LED & 4238-19 LED

SGF

CHF


CCT (K):  
Delivered Lumens (lm):  
System wattage (W)\*:  
Distribution:  
Delivered Efficacy (lm/W):  
Photometric type

4000  
543  
22,2  
Direct  
24  
C



4000  
441  
22,2  
Direct  
20  
C

\*System wattage include driver and LED module consumption

## 3038-19 LED & 4238-19 LED SGF

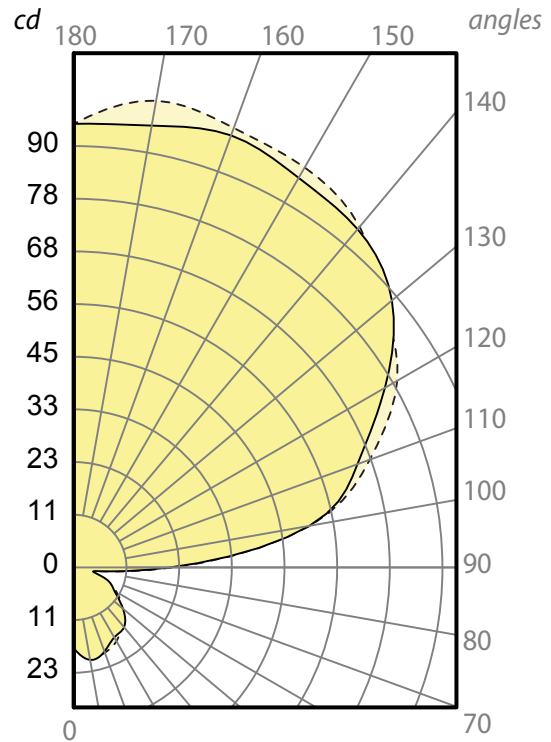

## 3038-19 LED & 4238-19 LED CHF

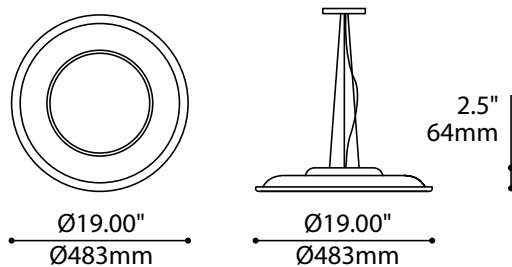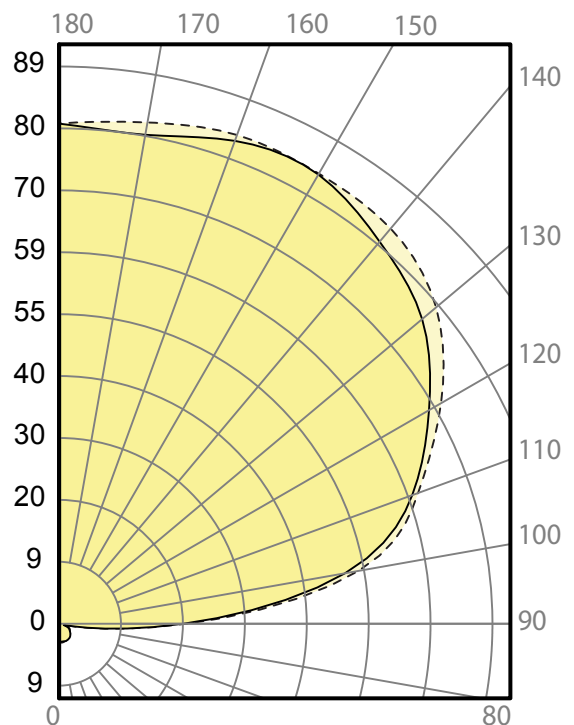

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



3038-19  
4238-19