

PHOTOMETRIC REPORT

MOONSET-47

3541+74541-47-LED-REG

CCT (K):	4000
Delivered Lumens (lm):	1677
Lumens per foot (lm)	419.2
System wattage (W)*:	17.2
Distribution:	Semi-Direct
Delivered Efficacy (lm/W):	97.5
Photometric type	C </td




Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	2.4 (60.96)
90-270 Axis:	93.6 (2377.44)
Height:	3.6 (91.44)

Luminaire spacing criteria

2 luminaires, plane 0:	1.43
2 luminaires, plane 90:	1.18
4 luminaires:	1.46

*System wattage include driver and LED module consumption

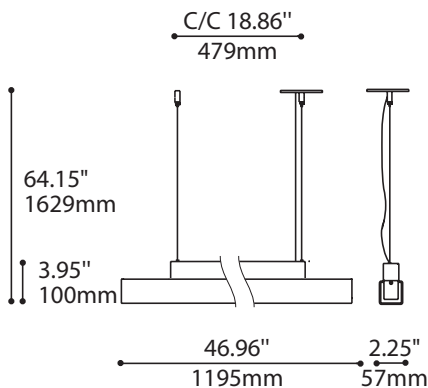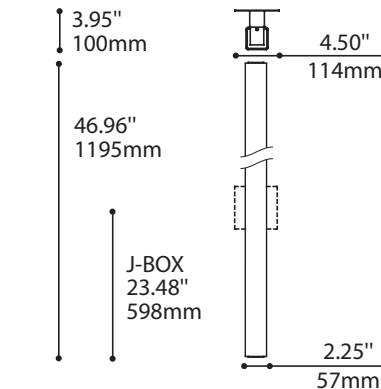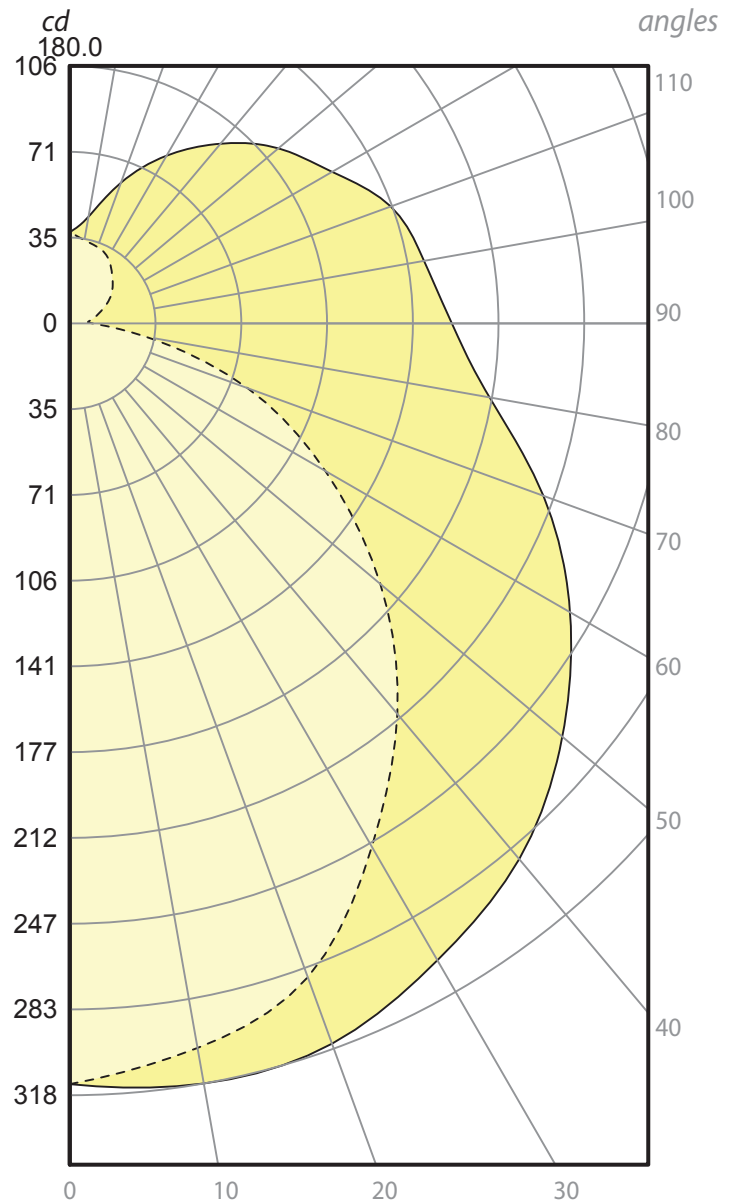

— 0
- - - 90

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com

74541
3541