

# CELESTE 4010-CEL

## 4010-CEL-CLR

CCT (K):	4000
Delivered Lumens (lm):	200
System wattage (W)*:	3.6
Distribution:	Direct / Indirect
Delivered Efficacy (lm/W):	55.56
Photometric type	C

### Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.9 (200)
90-270 Axis:	7.9 (200)
Height:	7.9 (200)

### Luminaire spacing criteria

2 luminaires, plane 0:	3.17
2 luminaires, plane 90:	3.17
4 luminaires:	2.69

\*System wattage include driver and LED module consumption  
Value shown per head

## 4010-CEL-FRO

CCT (K):	4000
Delivered Lumens (lm):	235
System wattage (W)*:	3.6
Distribution:	Direct / Indirect
Delivered Efficacy (lm/W):	65.28
Photometric type	C



### Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.9 (200)
90-270 Axis:	7.9 (200)
Height:	7.9 (200)

### Luminaire spacing criteria

2 luminaires, plane 0:	1.55
2 luminaires, plane 90:	1.55
4 luminaires:	1.69

\*System wattage include driver and LED module consumption  
Value shown per head

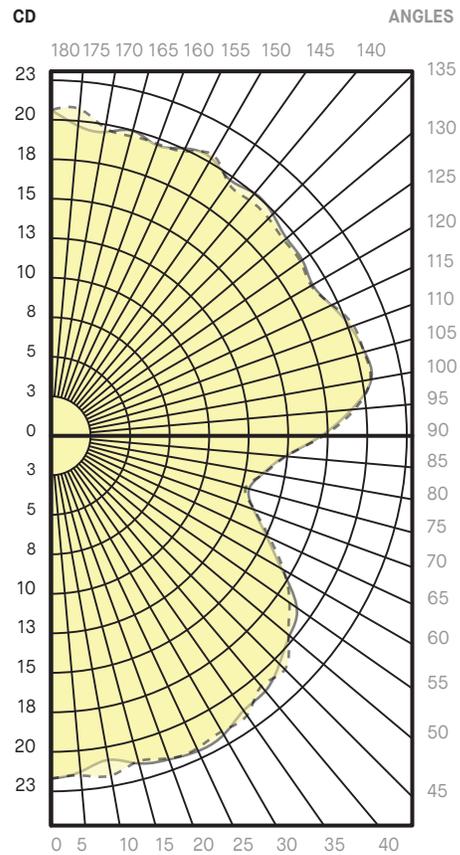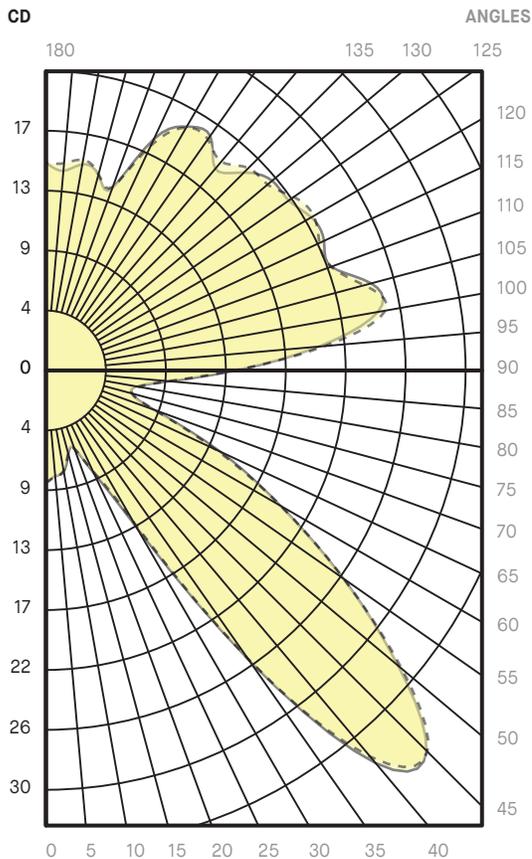

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.