




EUREKA

Monk

4175-LEDX013-SAA

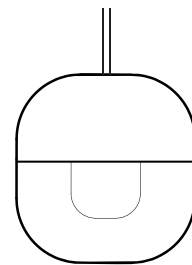

Photometric Report


| | |
|------------------------|-----------|
| CCT (K): | 3000/4000 |
| Initial lumens (lm): | 1700 |
| Delivered lumens (lm): | 968 |
| Input watts (W): | 12.7 |
| Number of LED's: | 1 |
| Lumens per LED: | 1700 |
| Distribution: | Direct |
| Efficiency (%): | 56.9 |
| Efficacy (lm/W): | 76.2 |
| Photometric type | C |

Luminous dimensions

| | |
|-----------------|---------------|
| Luminous shape: | Rectangle |
| Units: | in (mm) |
| 0-180 Axis: | 7.87 (200.00) |
| 90-270 Axis: | 7.87 (200.00) |
| Height: | 7.87 (200.00) |

Luminaire spacing criteria

| | |
|-------------------------|--------------|
| 2 luminaires, plane 0: | 59.84 (1520) |
| 2 luminaires, plane 90: | 59.44 (1510) |
| 4 luminaires: | 65.74 (1670) |

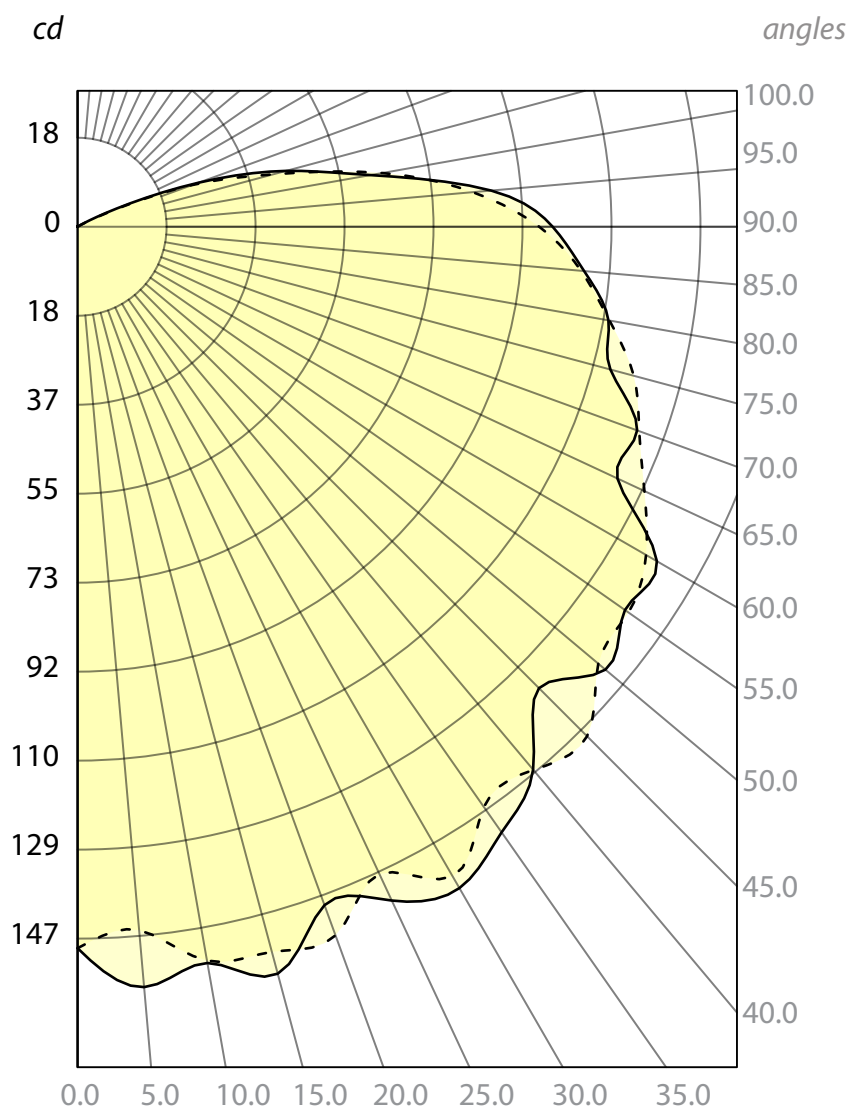

----- 90
————— 180