




EUREKA

Duke

4176-LEDX013-SAA

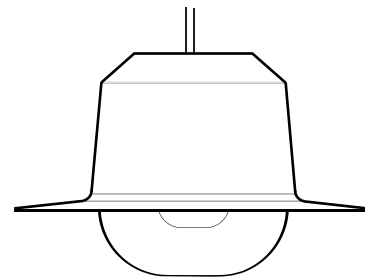

Photometric Report


CCT (K):	3000/4000
Initial lumens (lm):	1700
Delivered lumens (lm):	844
Input watts (W):	12.7
Number of LED's:	1
Lumens per LED:	1700
Distribution:	Direct
Efficiency (%):	49.6
Efficacy (lm/W):	66.4
Photometric type	C

Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	11.81 (300.00)
90-270 Axis:	11.81 (300.00)
Height:	7.87 (200)

Luminaire spacing criteria

2 luminaires, plane 0:	59.44 (1510)
2 luminaires, plane 90:	57.87 (1470)
4 luminaires:	65.35 (1660)

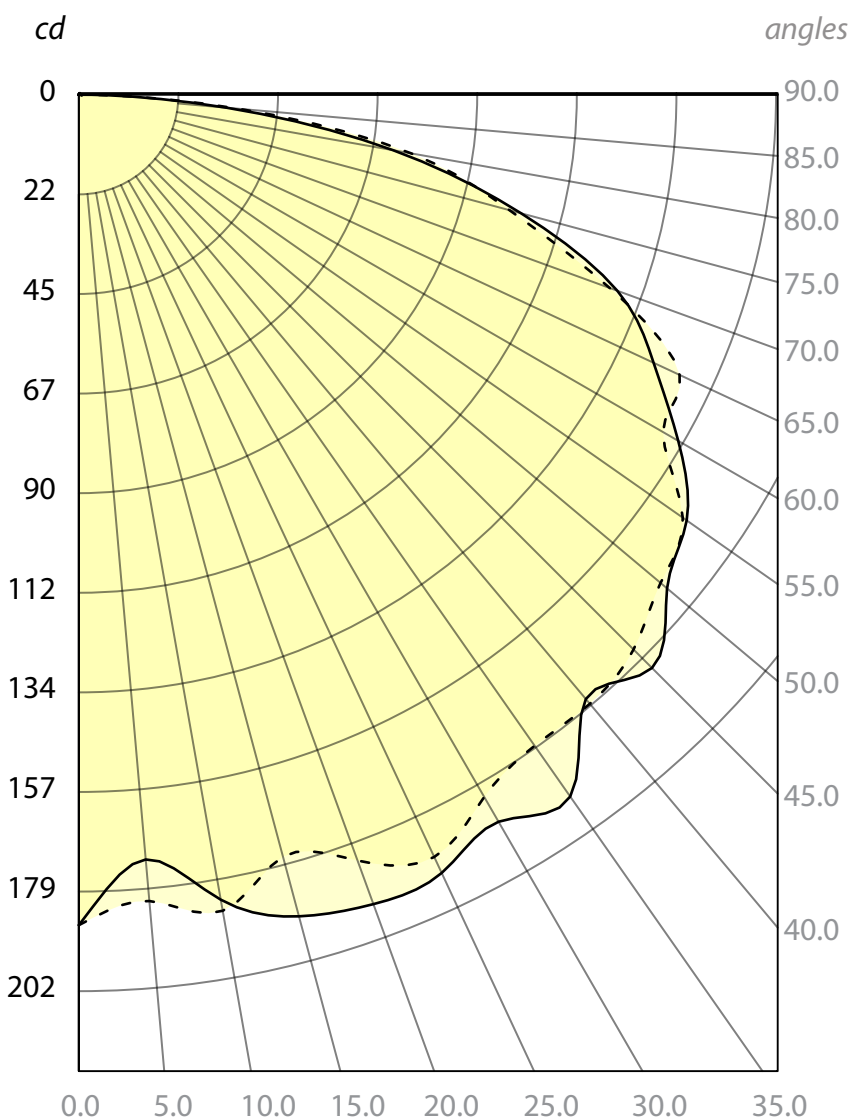

----- 90
————— 180