




EUREKA

Duke

4176-LEDX013-COP

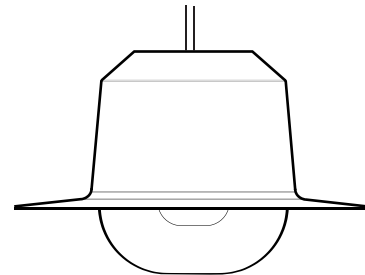

Photometric Report


CCT (K):	3000/4000
Initial lumens (lm):	1700
Delivered lumens (lm):	925
Input watts (W):	12.7
Number of LED's:	1
Lumens per LED:	1700
Distribution:	Direct
Efficiency (%):	54.4
Efficacy (lm/W):	72.8
Photometric type	C

Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	11.81 (300.00)
90-270 Axis:	11.81 (300.00)
Height:	7.87 (200)

Luminaire spacing criteria

2 luminaires, plane 0:	57.87 (1470)
2 luminaires, plane 90:	58.26 (1480)
4 luminaires:	65.35 (1660)

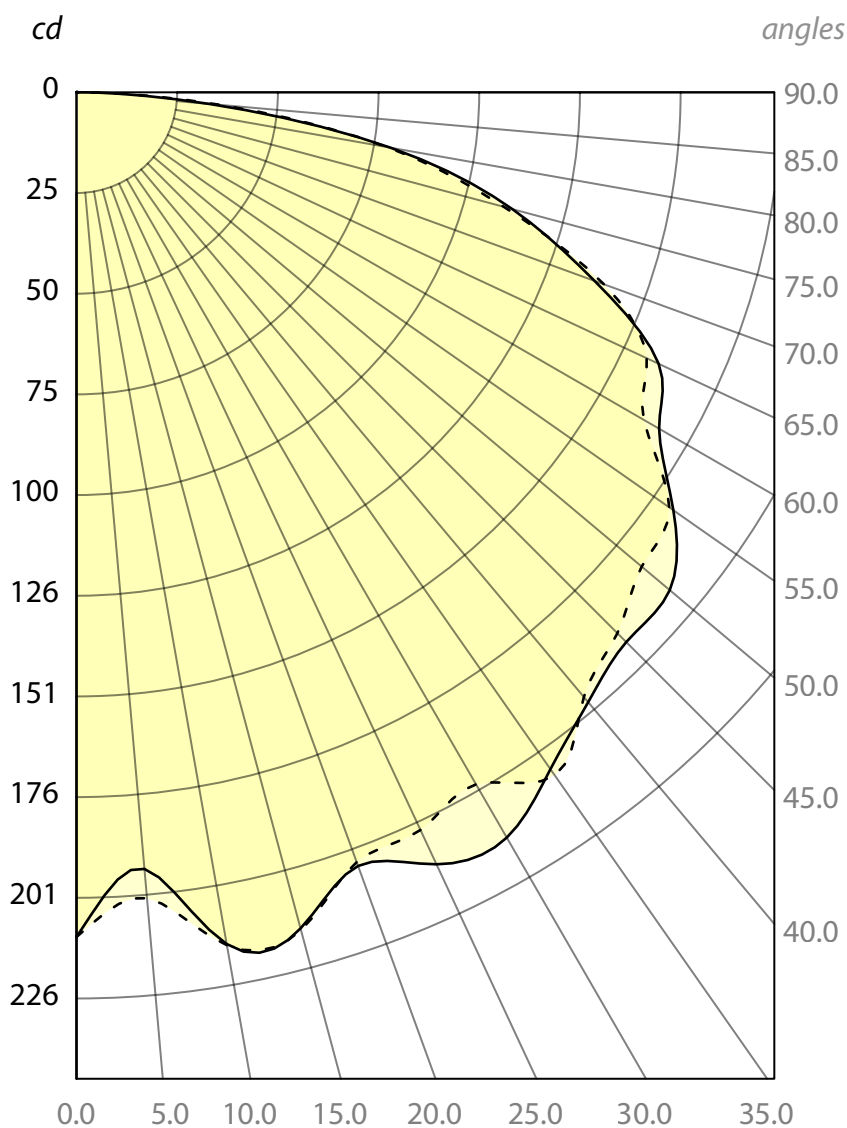

----- 90
————— 180