


# PHOTOMETRIC REPORT

SENTINEL SPOT 40°

## 4231-64-40-LED

CCT (K):	4000	4000	4000
Lumens per foot (lm)	7677	1656	6021
System wattage (W)*:	82.3	14.1	68.2
Distribution:	Direct-Indirect	Direct	Indirect
Delivered Efficacy (lm/W):	93	117	88
Photometric type	C	C	C

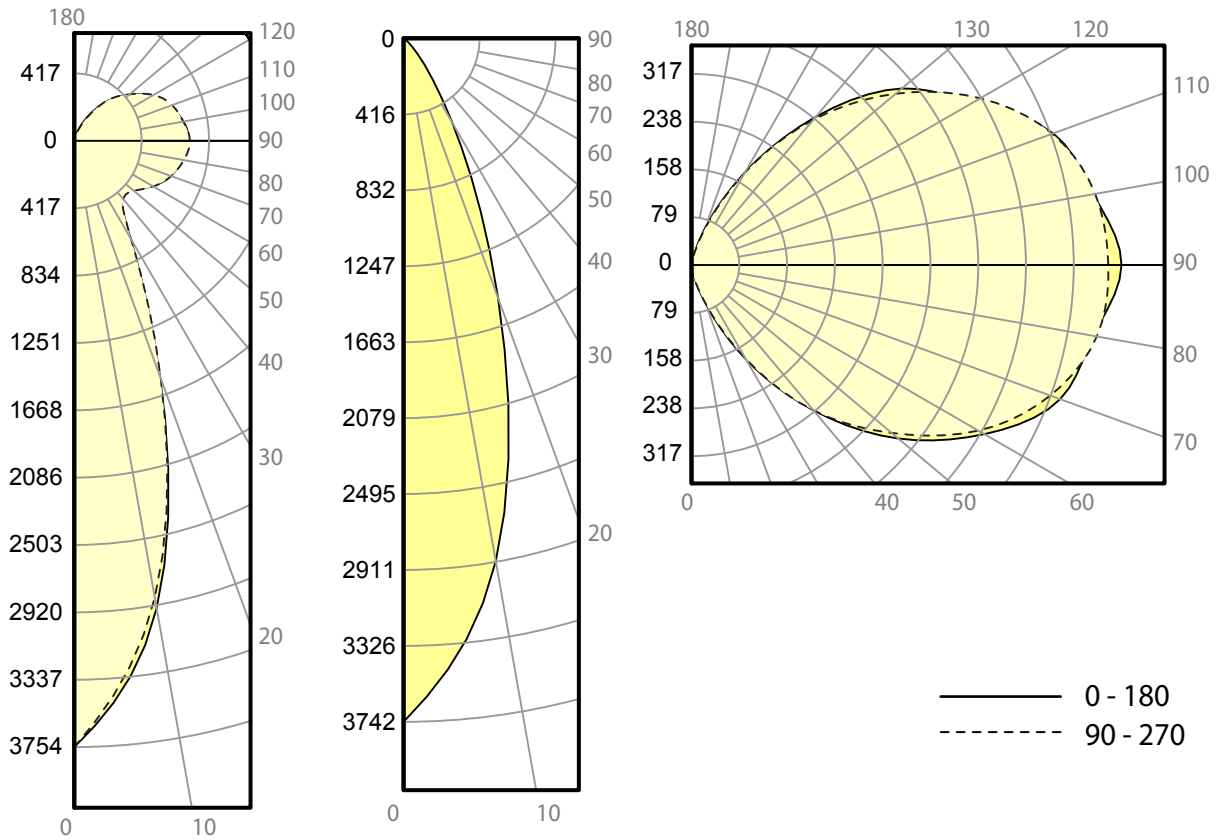


## Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	3.94 (100)
90-270 Axis:	3.94 (100)
Height:	62.99(1600)

## Luminaire spacing criteria

2 luminaires, plane 0:	0.58
2 luminaires, plane 90:	0.56
4 luminaires:	0.62

\*System wattage includes driver and LED module consumption

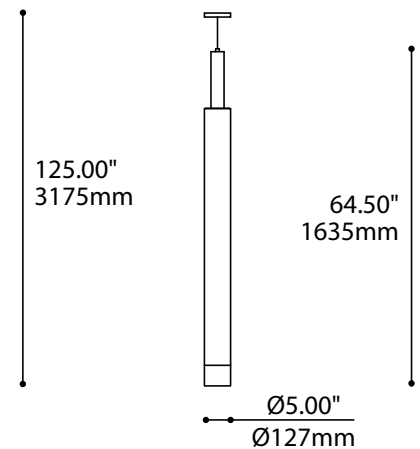

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com

4231-64