

# PHOTOMETRIC REPORT

CANNON

## 4241-61-LED

CCT (K): 4000  
Delivered Lumens (lm): 8454  
System wattage (W)\*: 83.2  
Distribution: Direct-Indirect  
Delivered Efficacy (lm/W): 101.6  
Photometric type: C



### Luminous dimensions

Luminous shape: Rectangle  
Units: in (mm)  
0-180 Axis: 0.8 (243.84)  
90-270 Axis: 0.8 (243.84)  
Height: 5.2 (1584.9)

### Luminaire spacing criteria

2 luminaires, plane 0: 4.89  
2 luminaires, plane 90: 4.89  
4 luminaires: 4.55

\*System wattage includes driver and LED module consumption

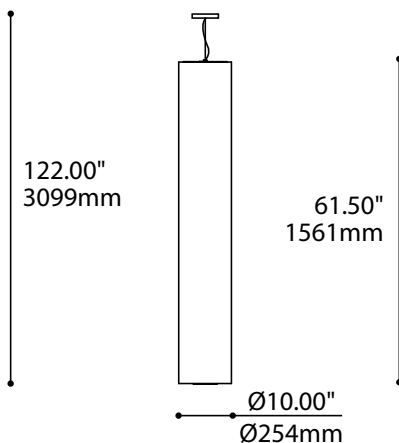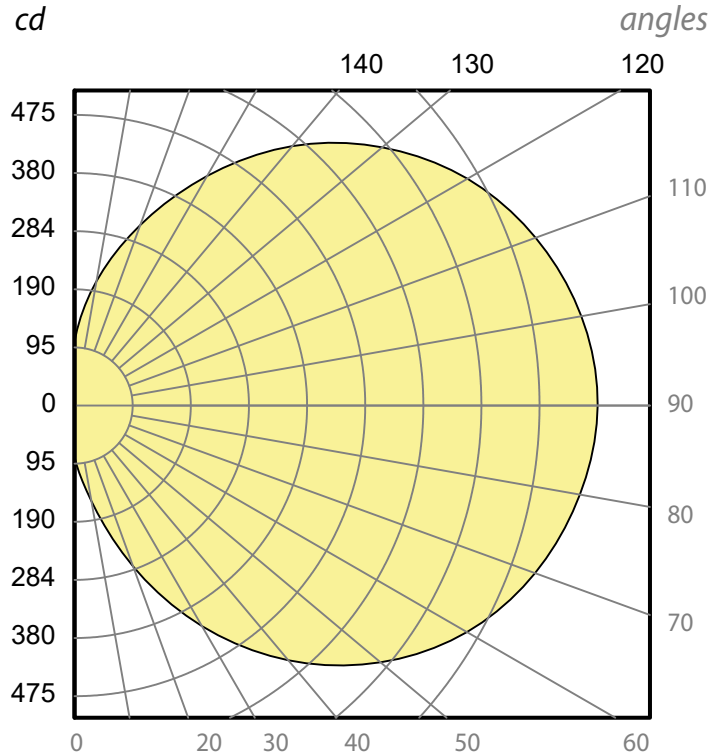

—— 0 - 180  
----- 90 - 270

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



EUREKA

225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com

4241-61