

# APERTURE 4256-24

## 4256-24-LED.40



CCT (K): 4000  
 Delivered Lumens (lm): 1533  
 System wattage (W)\*: 40.5  
 Distribution: Direct  
 Delivered Efficacy (lm/W): 38

## 4256-24-LED.40

CCT (K): 4000  
 Delivered Lumens (lm): 2302  
 System wattage (W)\*: 57.4  
 Distribution: Direct  
 Delivered Efficacy (lm/W): 40

## 4256-24-LED.TW

CCT (K): 2700-5000  
 Delivered Lumens @ 4000K (lm): 1163  
 System wattage (W)\*: 32.1  
 Distribution: Direct  
 Delivered Efficacy (lm/W): 36

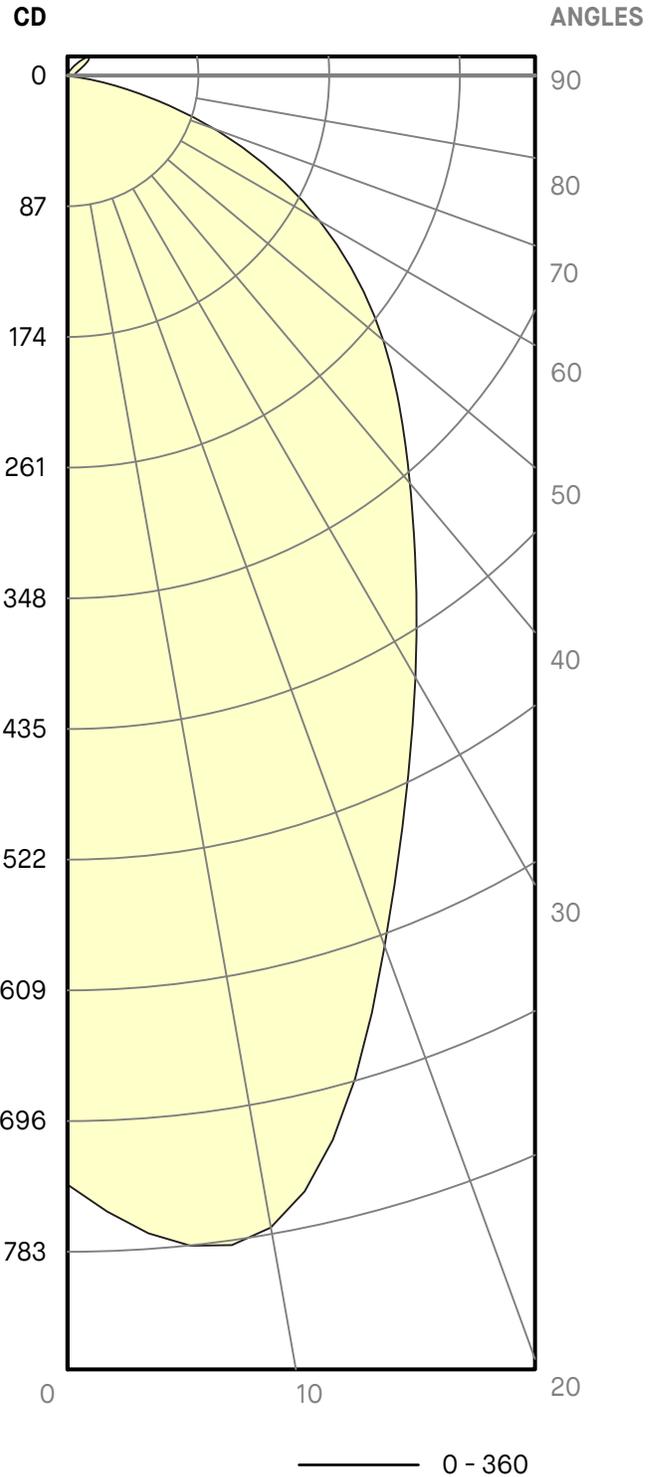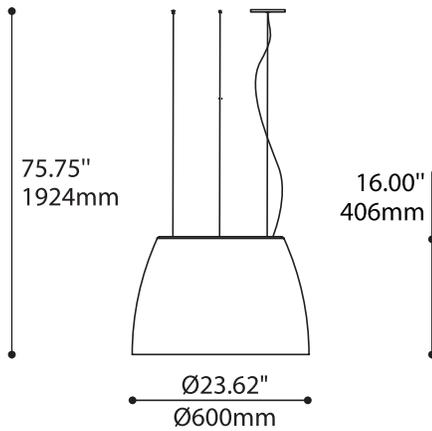

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.