

APERTURE 4256-36

4256-36-LED.40



CCT (K): 4000
 Delivered Lumens (lm): 2948
 System wattage (W)*: 62.1
 Distribution: Direct
 Delivered Efficacy (lm/W): 47

4256-36-LED.40

CCT (K): 4000
 Delivered Lumens (lm): 4402
 System wattage (W)*: 86.1
 Distribution: Direct
 Delivered Efficacy (lm/W): 51

4256-36-LED.TW

CCT (K): 2700-5000
 Delivered Lumens @ 4000K (lm): 2244
 System wattage (W)*: 49.4
 Distribution: Direct
 Delivered Efficacy (lm/W): 45

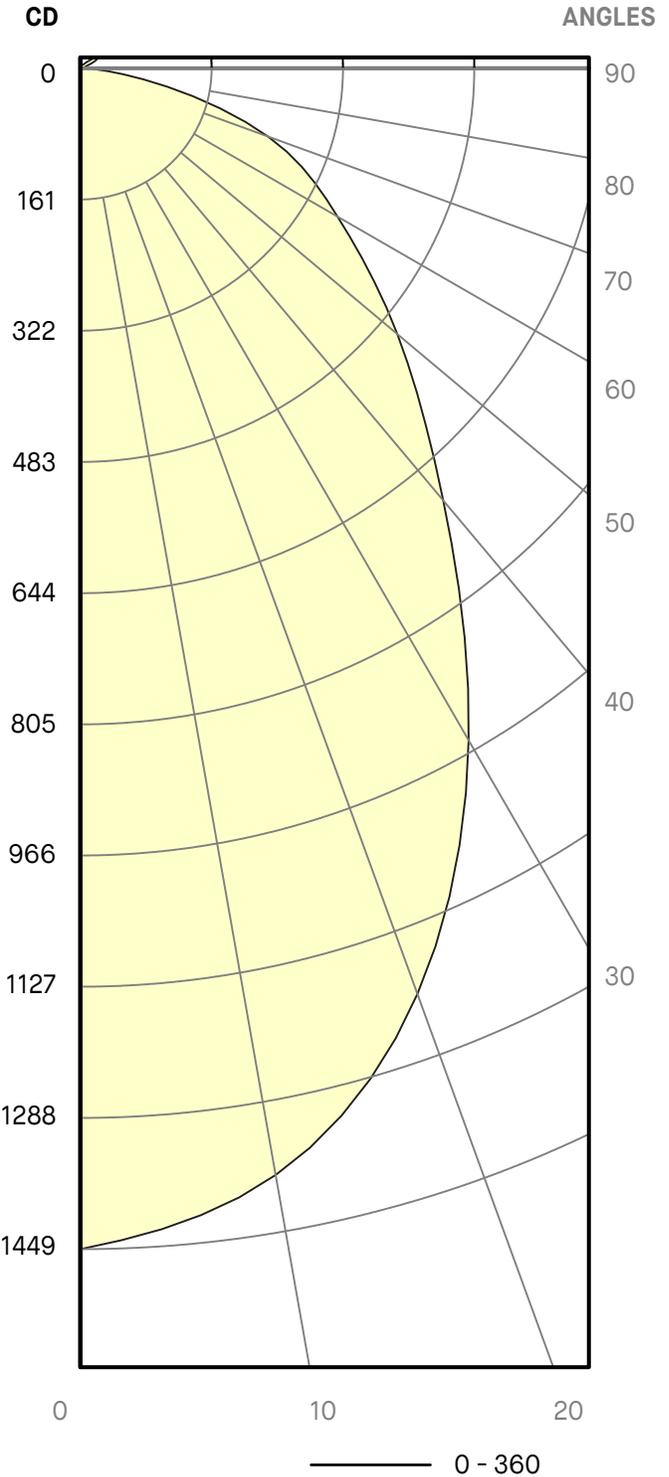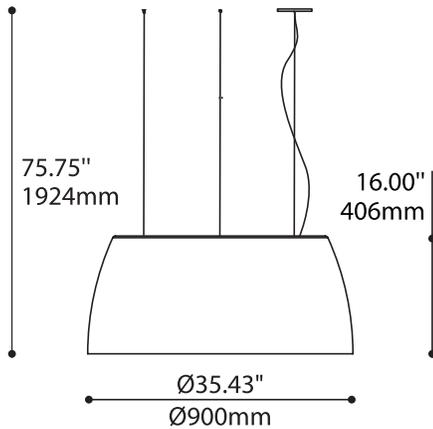

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.