


PHOTOMETRIC REPORT

COMPASS


4802-36-LED.40

CCT (K)	4000
Delivered lumens (lm)	5215
System wattage (W)	53
Distribution	Direct / Indirect
Delivered Efficacy (lm/W)	198
Photometric type	C

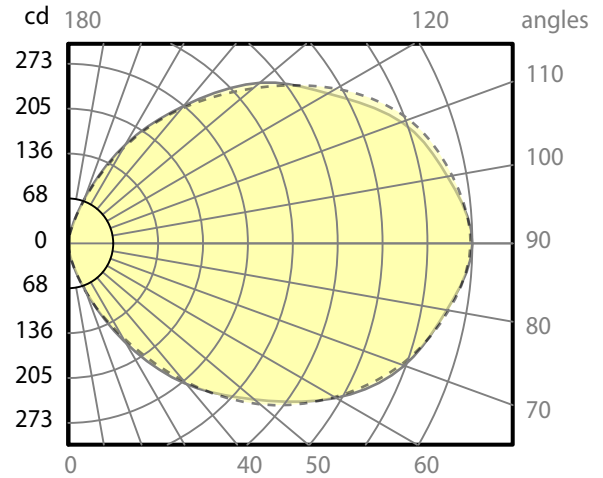


4802-54-LED.40

CCT (K)	4000
Delivered lumens (lm)	7766
System wattage (W)	77.4
Distribution	Direct / Indirect
Delivered Efficacy (lm/W)	100
Photometric type	C

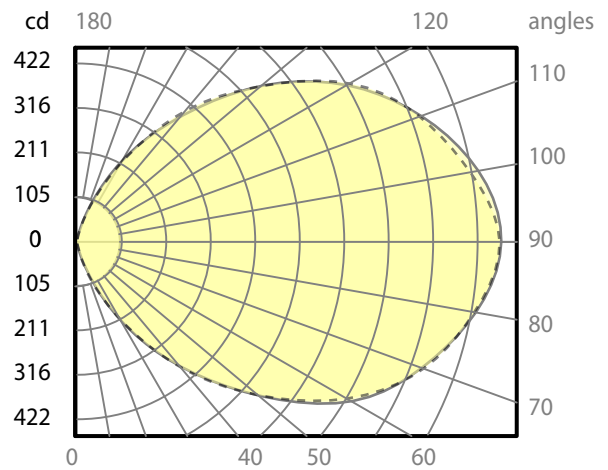

4802-72-LED.40

CCT (K)	4000
Delivered lumens (lm)	10906
System wattage (W)	114
Distribution	Direct / Indirect
Delivered Efficacy (lm/W)	95
Photometric type	C

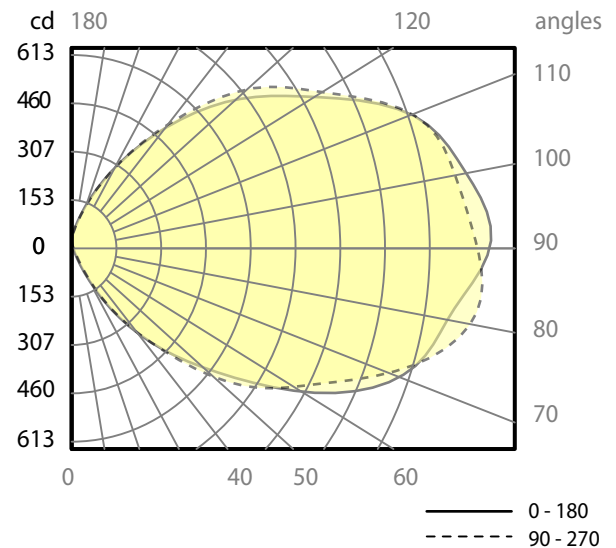

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



4802-XX