


4830D-15-REG / 4730-15-REG

CCT (K):	4000
Delivered Lumens (lm):	956
System wattage (W):	16.5
Distribution:	Direct
Delivered Efficacy (lm/W):	58

4830D-15-HO / 4730-15-HO

CCT (K):	4000
Delivered Lumens (lm):	1374
System wattage (W):	25
Distribution:	Direct
Delivered Efficacy (lm/W):	55






4830I-15-REG

CCT (K):	4000
Delivered Lumens (lm):	717
System wattage (W):	8.5
Distribution:	Indirect
Delivered Efficacy (lm/W):	84

4830I-15-HO

CCT (K):	4000
Delivered Lumens (lm):	1045
System wattage (W):	13.4
Distribution:	Indirect
Delivered Efficacy (lm/W):	78

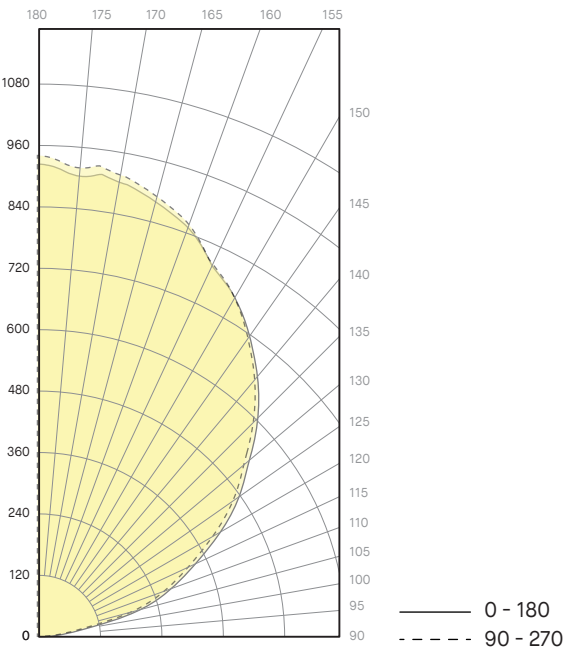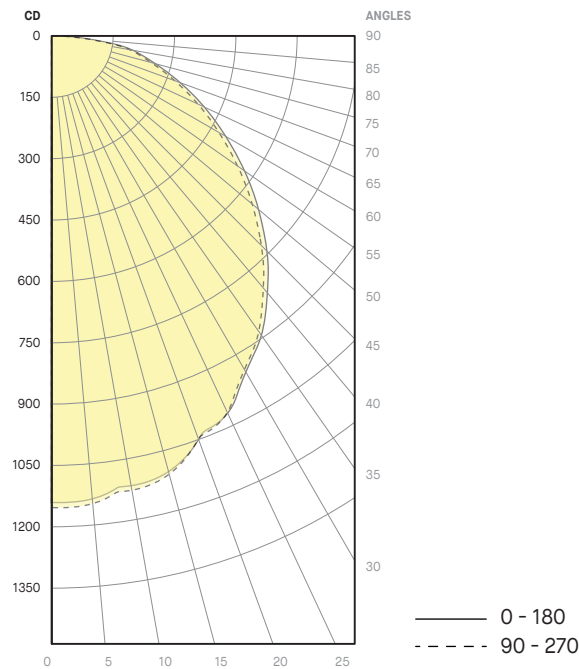

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.