

Direct

74710D-1-48-LOW


CCT (K):	4000
Delivered Lumens (lm):	576
System wattage (W):	6.0
Distribution:	Direct
Delivered Efficacy (lm/W):	96

74710D-1-48-REG

CCT (K):	4000
Delivered Lumens (lm):	1160
System wattage (W):	12.3
Distribution:	Direct
Delivered Efficacy (lm/W):	94

74710D-1-48-HO

CCT (K):	4000
Delivered Lumens (lm):	2303
System wattage (W):	25.6
Distribution:	Direct
Delivered Efficacy (lm/W):	90

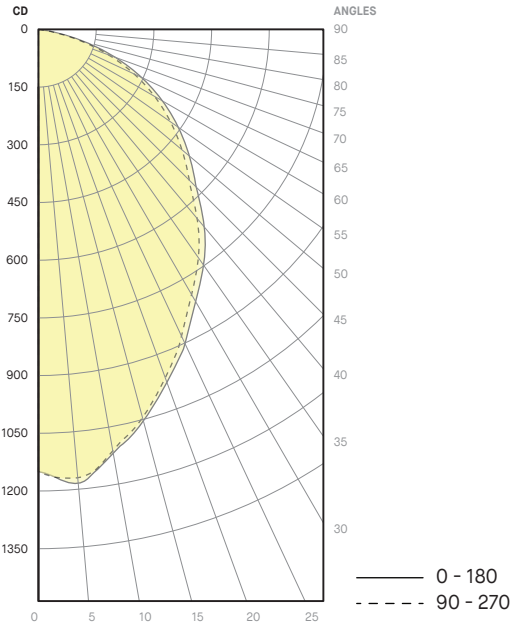

Uplight and downlight are displayed separately. Data shown are for one arm only. Multiply this data by the number of arms in the configuration. The diagrams shown are based on HO versions painted in WHE.

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

Indirect

74710I-1-48-LOW



CCT (K):	4000
Delivered Lumens (lm):	720
System wattage (W):	6.0
Distribution:	Indirect
Delivered Efficacy (lm/W):	120

74710I-1-48-REG

CCT (K):	4000
Delivered Lumens (lm):	1450
System wattage (W):	12.3
Distribution:	Indirect
Delivered Efficacy (lm/W):	118

74710I-1-48-HO

CCT (K):	4000
Delivered Lumens (lm):	2879
System wattage (W):	25.6
Distribution:	Indirect
Delivered Efficacy (lm/W):	112

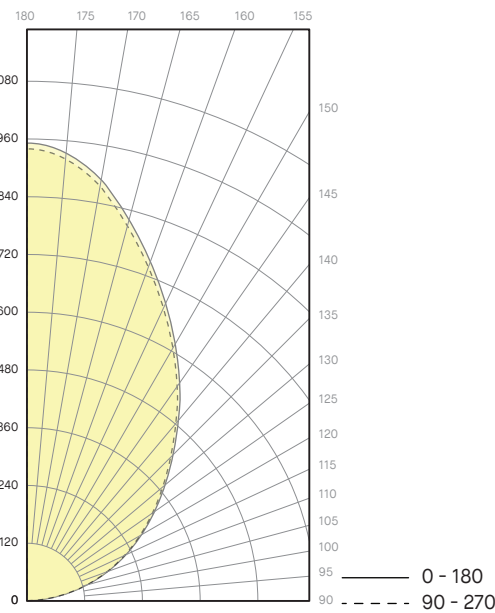

Direct

74710D-1-72-LOW


CCT (K):	4000
Delivered Lumens (lm):	864
System wattage (W):	9.0
Distribution:	Direct
Delivered Efficacy (lm/W):	96

74710D-1-72-REG

CCT (K):	4000
Delivered Lumens (lm):	1739
System wattage (W):	18.5
Distribution:	Direct
Delivered Efficacy (lm/W):	94

74710D-1-72-HO

CCT (K):	4000
Delivered Lumens (lm):	3454
System wattage (W):	38.4
Distribution:	Direct
Delivered Efficacy (lm/W):	90

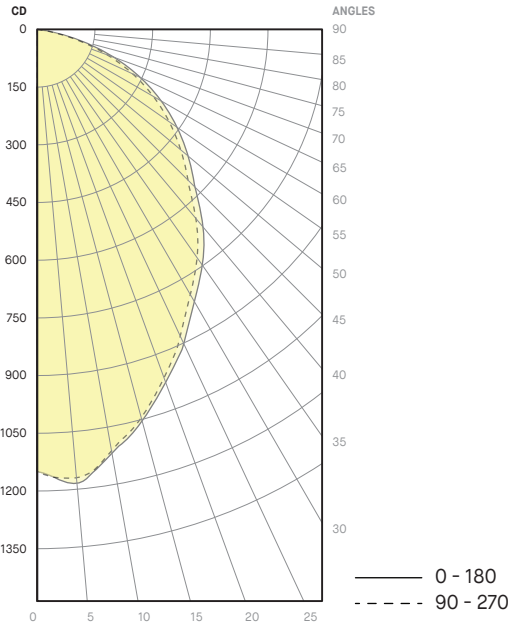

Indirect

74710I-1-72-LOW



CCT (K):	4000
Delivered Lumens (lm):	1083
System wattage (W):	9.1
Distribution:	Indirect
Delivered Efficacy (lm/W):	120

74710I-1-72-REG

CCT (K):	4000
Delivered Lumens (lm):	2174
System wattage (W):	18.6
Distribution:	Indirect
Delivered Efficacy (lm/W):	117

74710I-1-72-HO

CCT (K):	4000
Delivered Lumens (lm):	4307
System wattage (W):	38.8
Distribution:	Indirect
Delivered Efficacy (lm/W):	111

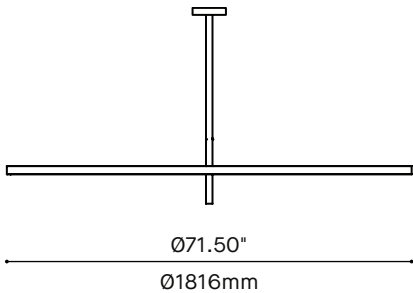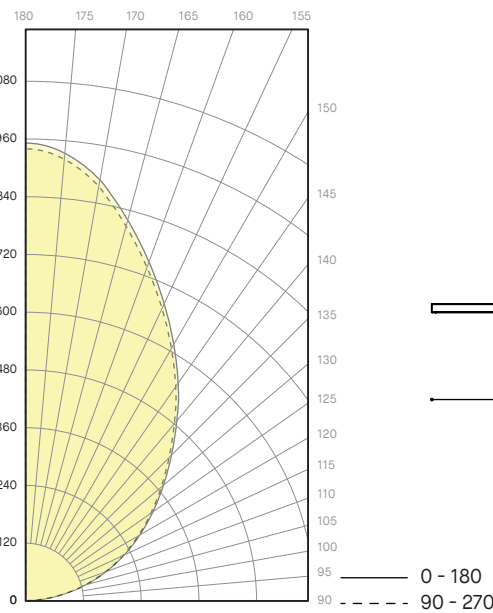

Uplight and downlight are displayed separately. Data shown are for one arm only. Multiply this data by the number of arms in the configuration. The diagrams shown are based on HO versions painted in WHE.

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

Direct

74710D-1-96-LOW


CCT (K):	4000
Delivered Lumens (lm):	1150
System wattage (W):	12.0
Distribution:	Direct
Delivered Efficacy (lm/W):	96

74710D-1-96-REG

CCT (K):	4000
Delivered Lumens (lm):	2319
System wattage (W):	24.5
Distribution:	Direct
Delivered Efficacy (lm/W):	95

74710D-1-96-HO

CCT (K):	4000
Delivered Lumens (lm):	4612
System wattage (W):	50.9
Distribution:	Direct
Delivered Efficacy (lm/W):	91

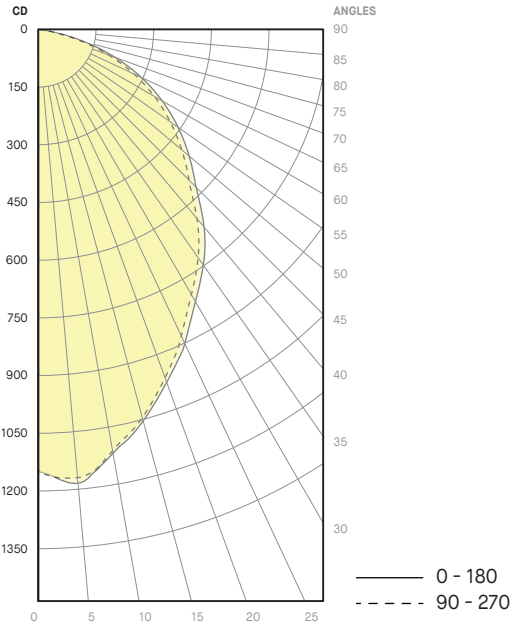

Indirect

74710I-1-96-LOW



CCT (K):	4000
Delivered Lumens (lm):	1441
System wattage (W):	12.0
Distribution:	Indirect
Delivered Efficacy (lm/W):	120

74710I-1-96-REG

CCT (K):	4000
Delivered Lumens (lm):	2900
System wattage (W):	24.6
Distribution:	Indirect
Delivered Efficacy (lm/W):	118

74710I-1-96-HO

CCT (K):	4000
Delivered Lumens (lm):	5759
System wattage (W):	51.2
Distribution:	Indirect
Delivered Efficacy (lm/W):	112

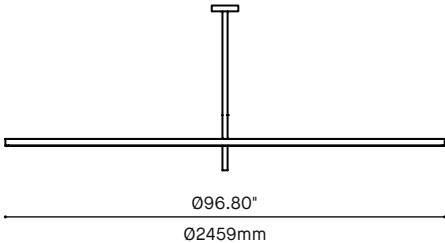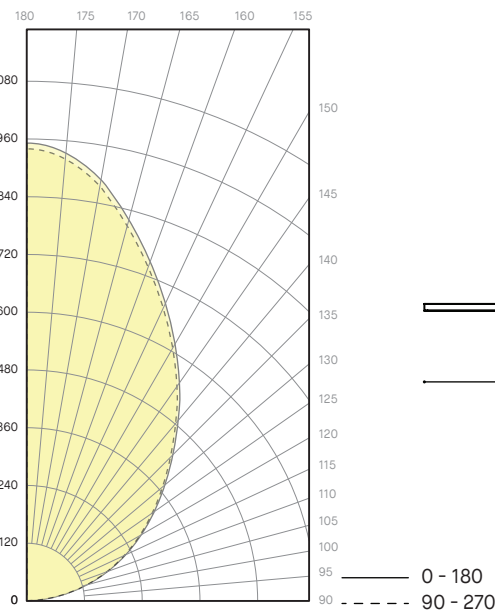

Uplight and downlight are displayed separately. Data shown are for one arm only. Multiply this data by the number of arms in the configuration. The diagrams shown are based on HO versions painted in WHE.

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.