

Direct LED.LO

CCT (K):	4000
Delivered Lumens (lm):	2646
System wattage (W):	42
Distribution:	Direct
Delivered Efficacy (lm/W):	64

Direct LED

CCT (K):	4000
Delivered Lumens (lm):	3304
System wattage (W):	54
Distribution:	Direct
Delivered Efficacy (lm/W):	61

Direct LED.HO

CCT (K):	4000
Delivered Lumens (lm):	4511
System wattage (W):	84
Distribution:	Direct
Delivered Efficacy (lm/W):	54


\*For Silvergray version.  
\*\*System wattage include driver and LED module consumption

Indirect LED



CCT (K):	4000
Delivered Lumens (lm):	1408
System wattage (W):	19
Distribution:	Indirect
Delivered Efficacy (lm/W):	74

Indirect LED.HO

CCT (K):	4000
Delivered Lumens (lm):	2051
System wattage (W):	29
Distribution:	Indirect
Delivered Efficacy (lm/W):	71



\*LEDHO (High Output) photometric distributions below.

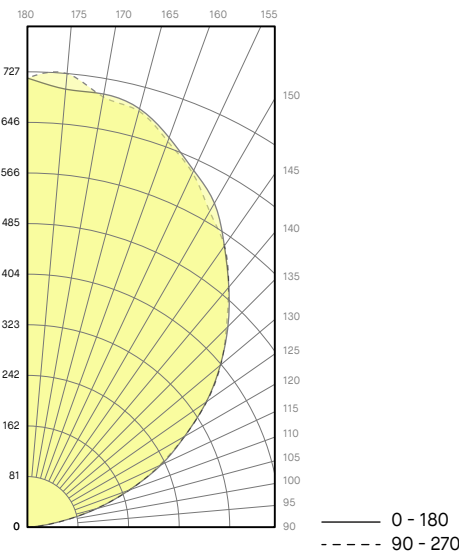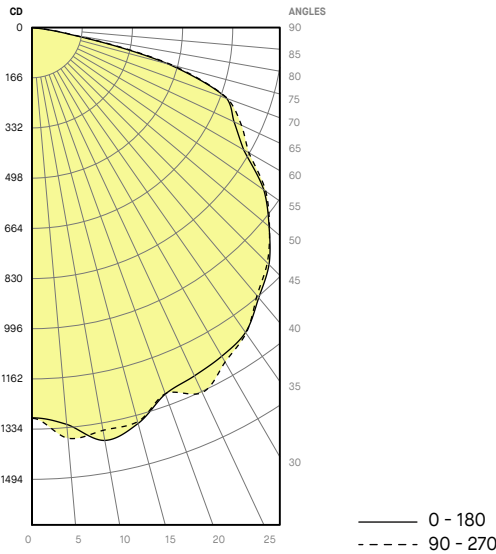

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.