

4283-DI-25-SGF-LED.HO.HO

CCT (K):	4000
Delivered Lumens (lm):	6562
System wattage (W)*:	113
Distribution:	Direct
Delivered Efficacy (lm/W):	125
Photometric type	C

Luminous dimensions	
Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	29.1 (740)
90-270 Axis:	30.7 (780)
Height:	31.1 (790)



Luminaire spacing criteria	
2 luminaires, plane 0:	1.43
2 luminaires, plane 90:	1.45
4 luminaires:	1.54

\*System wattage include driver and LED module consumption

\*For Silvergray version. Expect a 10% decrease in performance for charcoal, red and navy blue (direct).

\*Photometric report generated with a 25" Mill. Expect no differences with a 14" or 35" Mill.

\*Photometric report generated with a 4283 Mill. Expect no differences with a 4583 Mill.

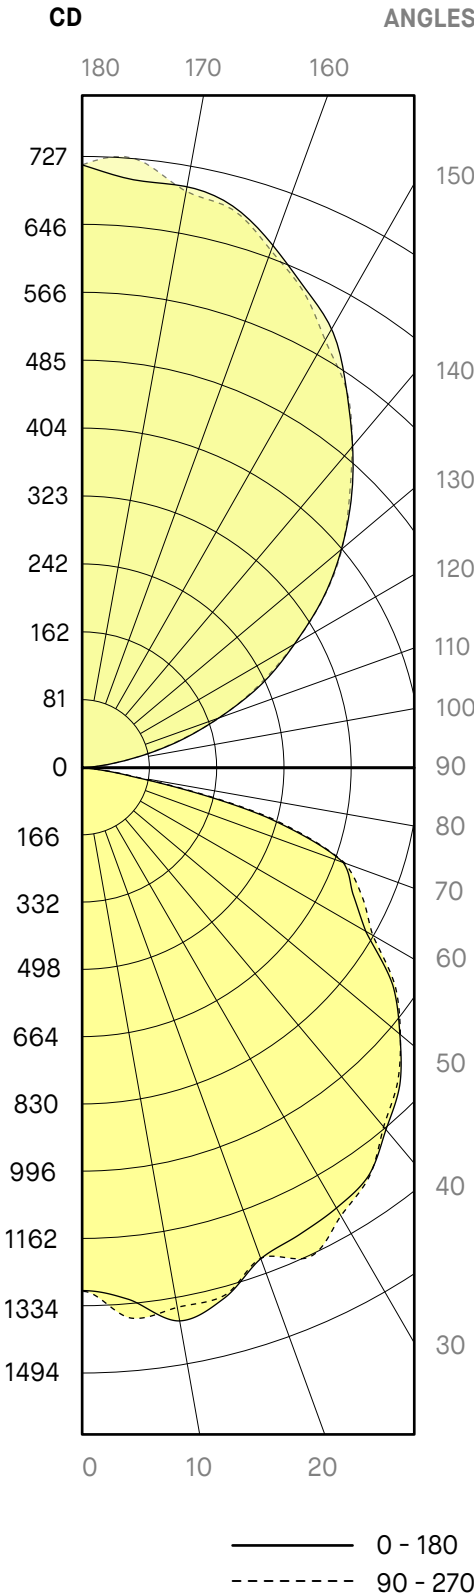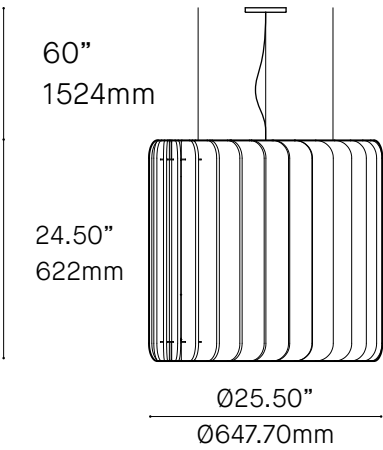

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.