

4x78D-LEDLO

CCT (K):	4000
Delivered Lumens (lm):	3955
System wattage (W):	56
Distribution:	Direct
Delivered Efficacy (lm/W):	71

4x78D-LED

CCT (K):	4000
Delivered Lumens (lm):	5390
System wattage (W):	82
Distribution:	Direct
Delivered Efficacy (lm/W):	66

4x78D-LEDHO


CCT (K):	4000
Delivered Lumens (lm):	7424
System wattage (W):	121
Distribution:	Direct
Delivered Efficacy (lm/W):	61

4x7xI-LED



CCT (K):	4000
Delivered Lumens (lm):	1408
System wattage (W):	19
Distribution:	Direct
Delivered Efficacy (lm/W):	74

4x7xI-LEDHO

CCT (K):	4000
Delivered Lumens (lm):	2051
System wattage (W):	29
Distribution:	Direct
Delivered Efficacy (lm/W):	71



\*LEDHO (High Output) photometric distributions below.

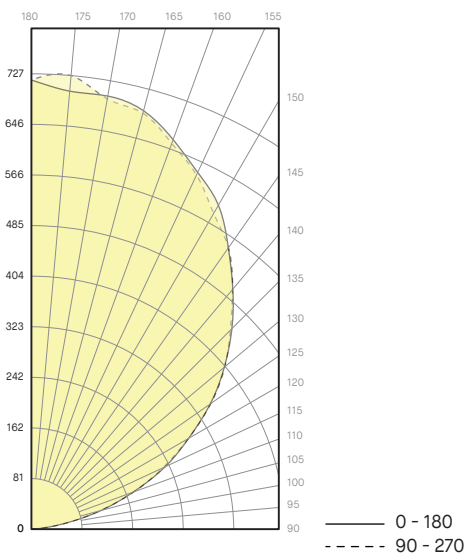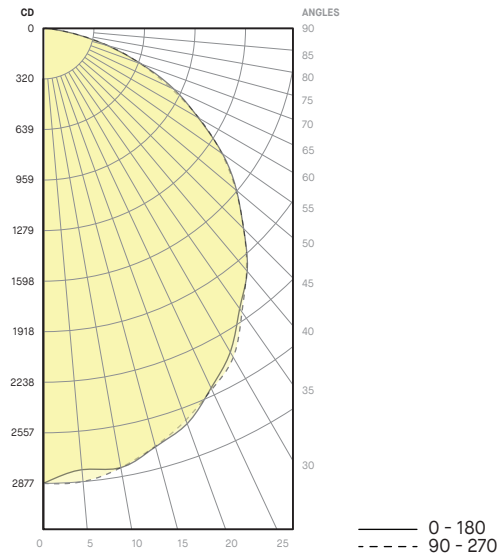

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.