



3404-CFR-REG

CCT (K):	4000
Delivered Lumens (lm):	371
System wattage (W)*:	3.7
Distribution:	Direct
Delivered Efficacy (lm/W):	100

3404-CFR-HO

CCT (K):	4000
Delivered Lumens (lm):	746
System wattage (W)*:	7.9
Distribution:	Direct
Delivered Efficacy (lm/W):	95

\*System wattage includes driver and LED module consumption

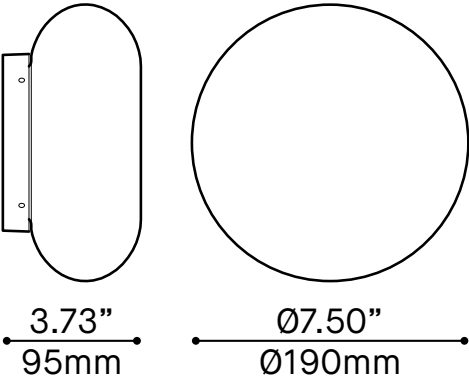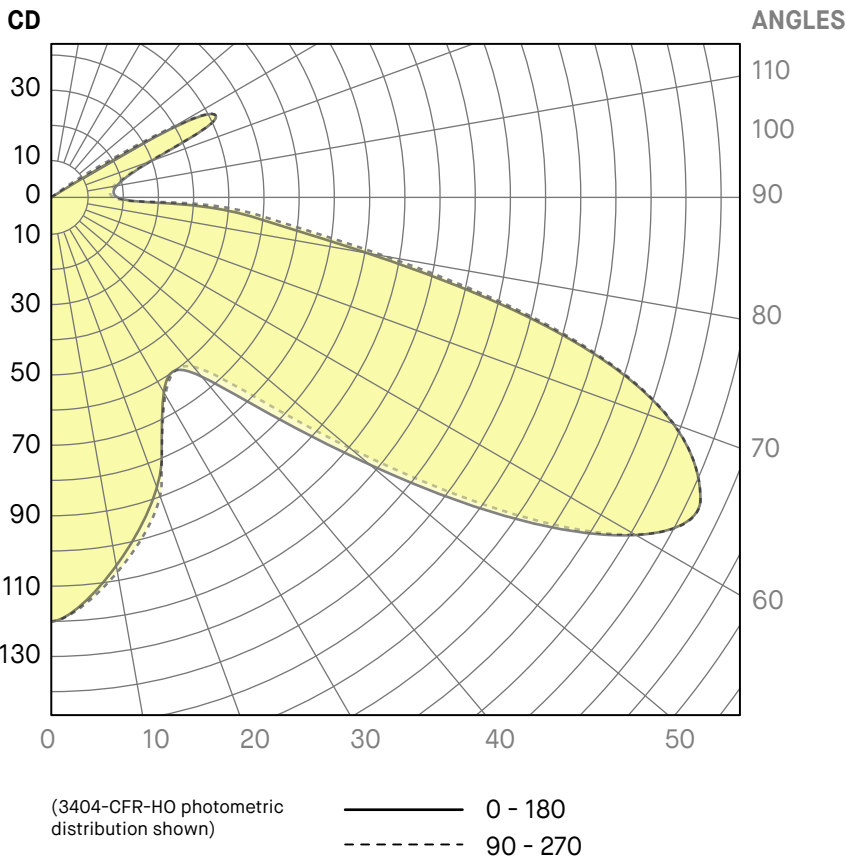

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



3404-FRO-REG

CCT (K):	4000
Delivered Lumens (lm):	377
System wattage (W)*:	3.7
Distribution:	Direct
Delivered Efficacy (lm/W):	101

3404-FRO-HO

CCT (K):	4000
Delivered Lumens (lm):	757
System wattage (W)*:	7.9
Distribution:	Direct
Delivered Efficacy (lm/W):	96

\*System wattage includes driver and LED module consumption

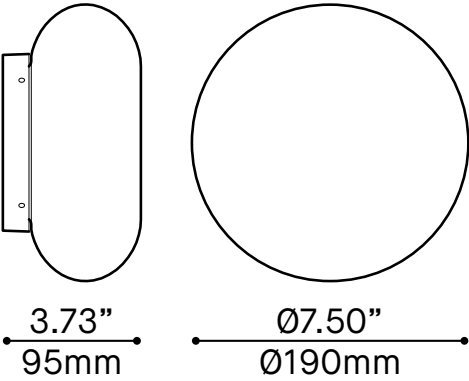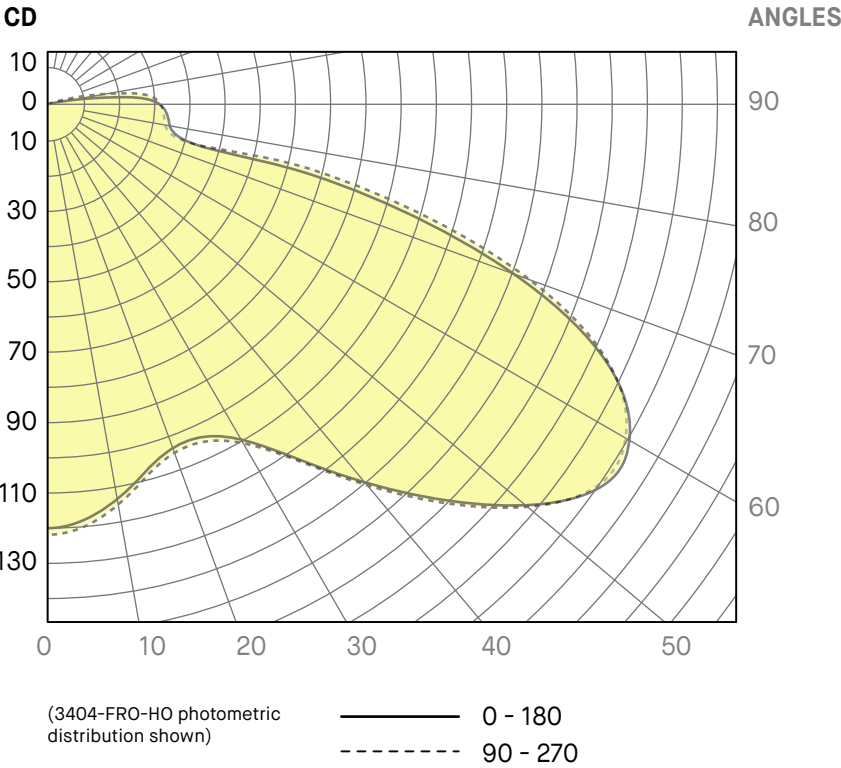

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.