



XX300-48D-LED

CCT (K):	4000
Delivered Lumens (lm):	2109
System wattage (W):	32
Distribution:	Direct
Delivered Efficacy (lm/W):	65

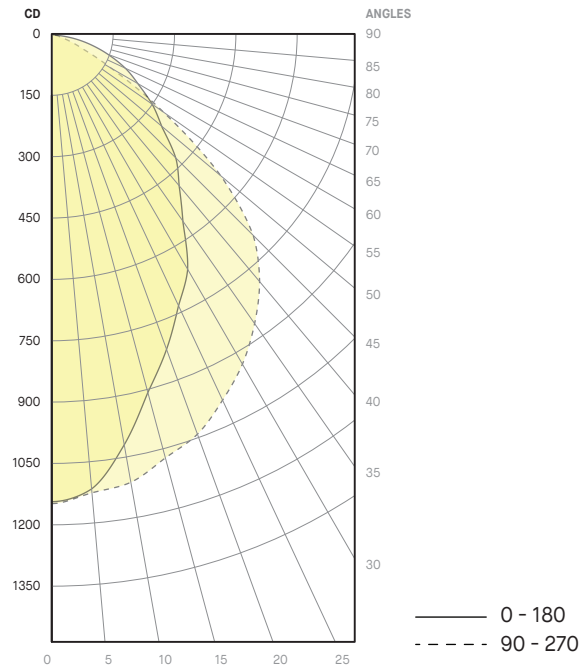

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

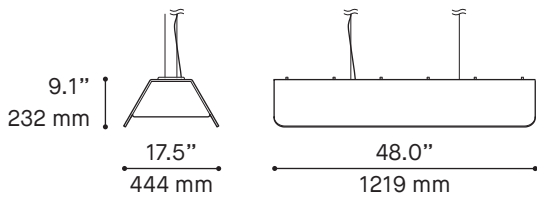

9.1"

232 mm

17.5"

444 mm

48.0"

1219 mm

74300-48I-LED



CCT (K):	4000
Delivered Lumens (lm):	1836
System wattage (W):	26
Distribution:	Indirect
Delivered Efficacy (lm/W):	71

74300-XXI-LED (ST/END SECTION)

CCT (K):	4000
Delivered Lumens (lm):	1468
System wattage (W):	21
Distribution:	Indirect
Delivered Efficacy (lm/W):	71

74300-XXI-LED (MIDDLE SECTION)

CCT (K):	4000
Delivered Lumens (lm):	1102
System wattage (W):	16
Distribution:	Indirect
Delivered Efficacy (lm/W):	71

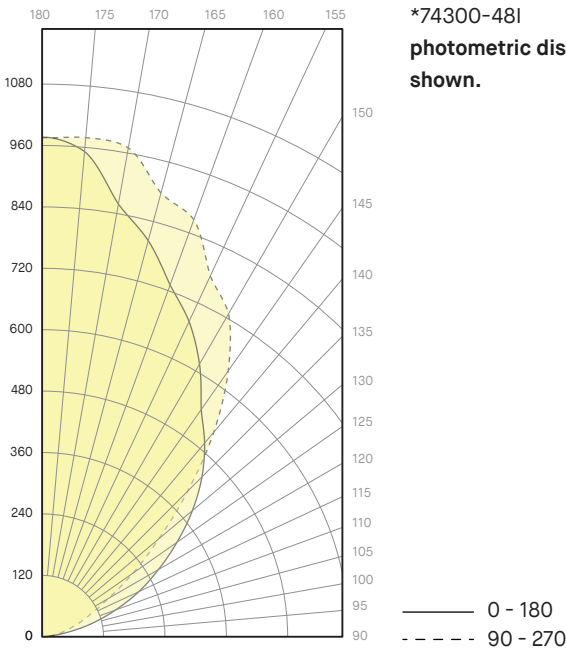

\*74300-48I  
photometric distribution  
shown.