
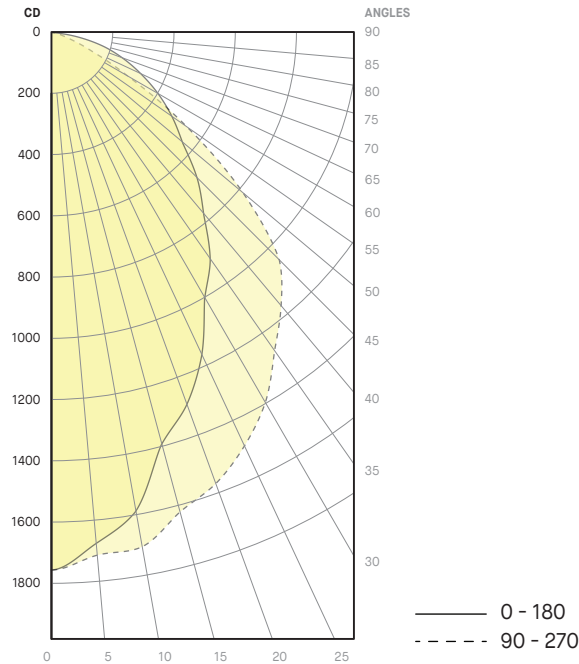


XX300-72D-LED

CCT (K):	4000
Delivered Lumens (lm):	3398
System wattage (W):	51
Distribution:	Direct
Delivered Efficacy (lm/W):	67

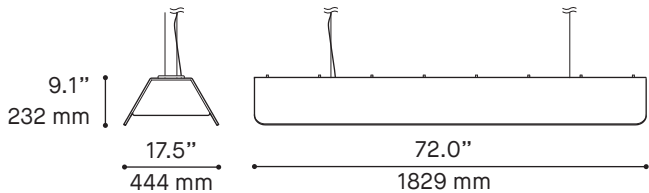

74300-72I-LED



CCT (K):	4000
Delivered Lumens (lm):	2761
System wattage (W):	39
Distribution:	Indirect
Delivered Efficacy (lm/W):	71

74300-XXI-LED (START/END SECTION)

CCT (K):	4000
Delivered Lumens (lm):	2366
System wattage (W):	33
Distribution:	Indirect
Delivered Efficacy (lm/W):	71

74300-XXI-LED (MIDDLE SECTION)

CCT (K):	4000
Delivered Lumens (lm):	1971
System wattage (W):	28
Distribution:	Indirect
Delivered Efficacy (lm/W):	71

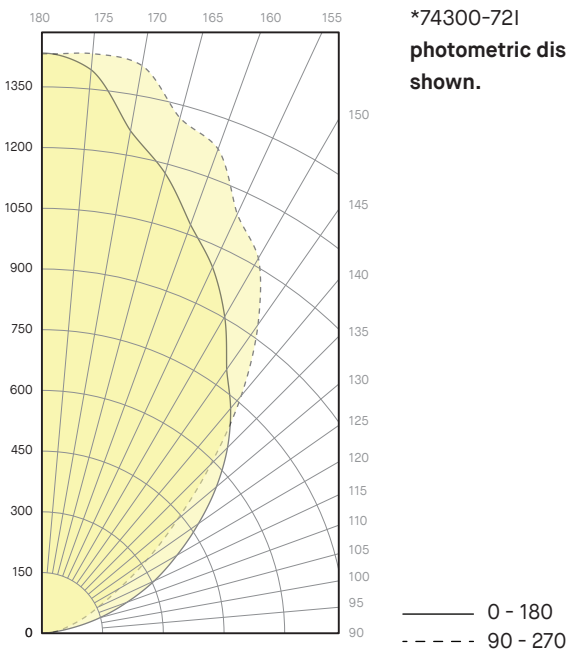

\*74300-72I photometric distribution shown.

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.