

74280-24-LEDLO-40-WHE

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	1339
System wattage (W):	13,5
Distribution:	Direct
Delivered Efficacy (lm/W):	99

74280-24-LED-40-WHE

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	1701
System wattage (W):	17,7
Distribution:	Direct
Delivered Efficacy (lm/W):	96

74280-24-LEDHO-40-WHE

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	2053
System wattage (W):	22,1
Distribution:	Direct
Delivered Efficacy (lm/W):	93

74280-24-LED-TW-WHE\*

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	1521
System wattage (W):	15,6
Distribution:	Direct
Delivered Efficacy (lm/W):	97

74280-48-LEDLO-40-WHE

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	2679
System wattage (W):	27,1
Distribution:	Direct
Delivered Efficacy (lm/W):	99

74280-48-LED-40-WHE


CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	3402
System wattage (W):	35,5
Distribution:	Direct
Delivered Efficacy (lm/W):	96

74280-48-LEDHO-40-WHE

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	4107
System wattage (W):	44,2
Distribution:	Direct
Delivered Efficacy (lm/W):	93

74280-48-LED-TW-WHE\*

CCT (K):	4000 @ 90CRI
Delivered Lumens (lm):	3042
System wattage (W):	31,2
Distribution:	Direct
Delivered Efficacy (lm/W):	97

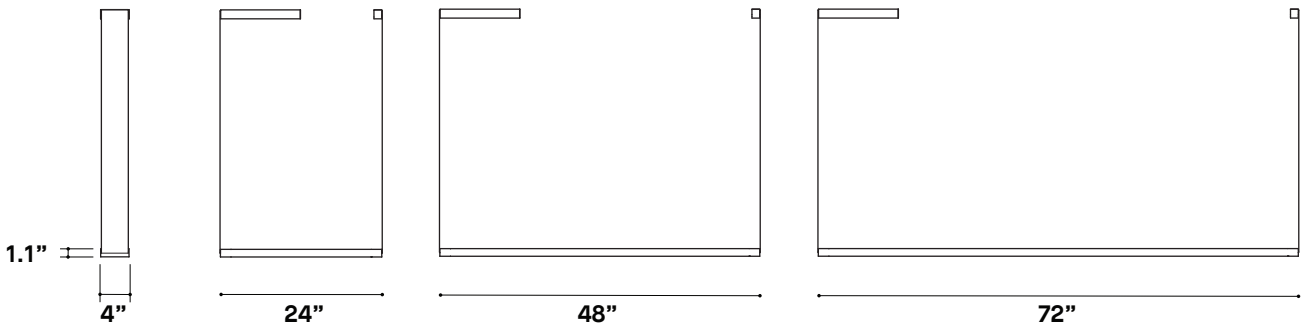

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

74280-72-LEDLO-40-WHE

CCT (K): 4000 @ 90CRI  
Delivered Lumens (lm): 4018  
System wattage (W): 40,6  
Distribution: Direct  
Delivered Efficacy (lm/W): 99

74280-72-LED-40-WHE

CCT (K): 4000 @ 90CRI  
Delivered Lumens (lm): 5102  
System wattage (W): 53,2  
Distribution: Direct  
Delivered Efficacy (lm/W): 96


74280-72-LEDHO-40-WHE

CCT (K): 4000 @ 90CRI  
Delivered Lumens (lm): 6160  
System wattage (W): 66,2  
Distribution: Direct  
Delivered Efficacy (lm/W): 93

74280-72-LED-TW-WHE\*

CCT (K): 4000 @ 90CRI  
Delivered Lumens (lm): 4564  
System wattage (W): 46,8  
Distribution: Direct  
Delivered Efficacy (lm/W): 97

\*LED (Regular Output) **photometric distribution** as shown. System wattage includes driver and LED module consumption.  
\*\*Tested with WHE Finish (9.6% efficacy loss with BLKE Finish).

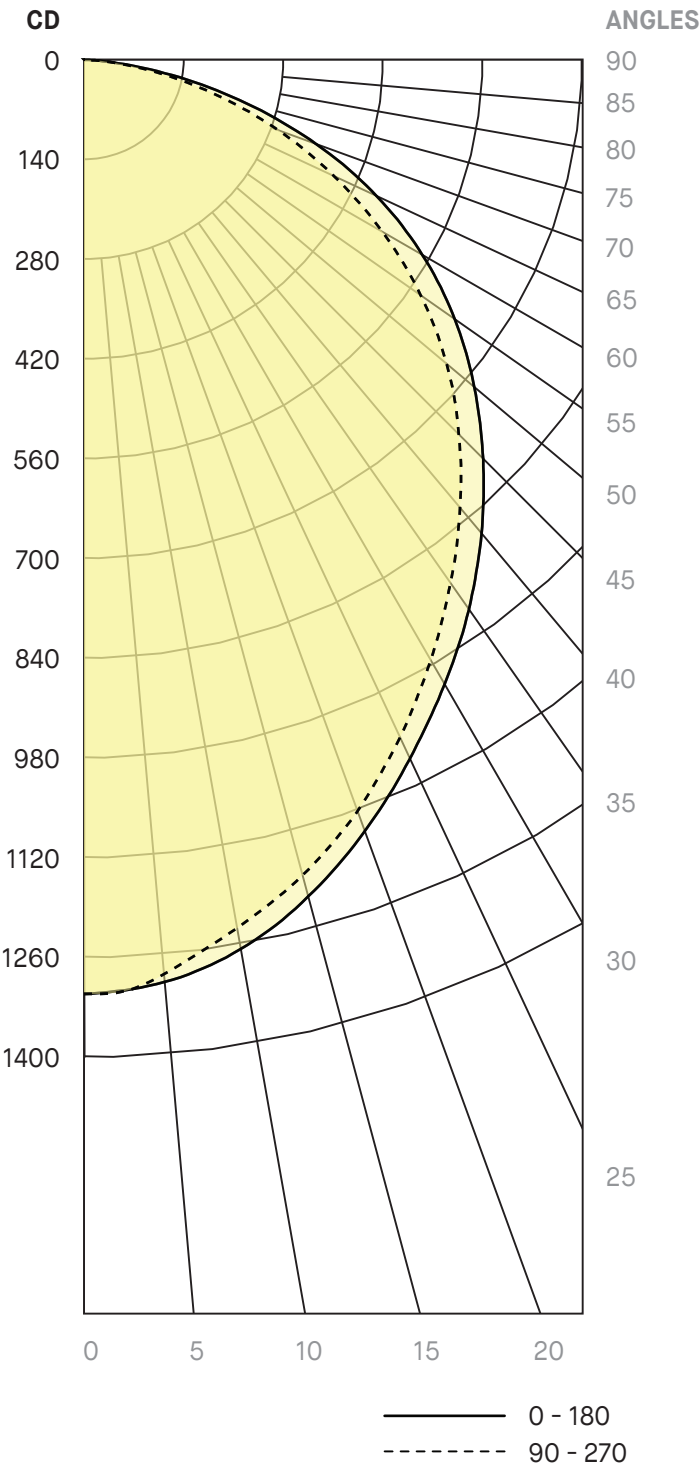

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.