

PHOTOMETRIC REPORT




CYCLE REG

4800-24-LED.40.REG-WHM

CCT (K): 4000
 Delivered Lumens (lm): 1343
 System wattage (W)*: 19
 Distribution: Direct-Indirect
 Delivered Efficacy (lm/W): 71
 Photometric type: C

4800-24-LED.40.REG-ANTE

CCT (K): 4000
 Delivered Lumens (lm): 961
 System wattage (W)*: 19
 Distribution: Direct-Indirect
 Delivered Efficacy (lm/W): 50
 Photometric type: C

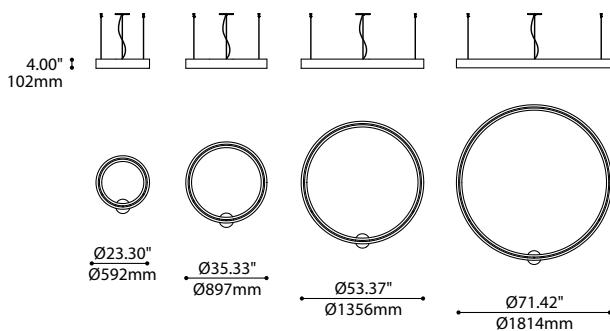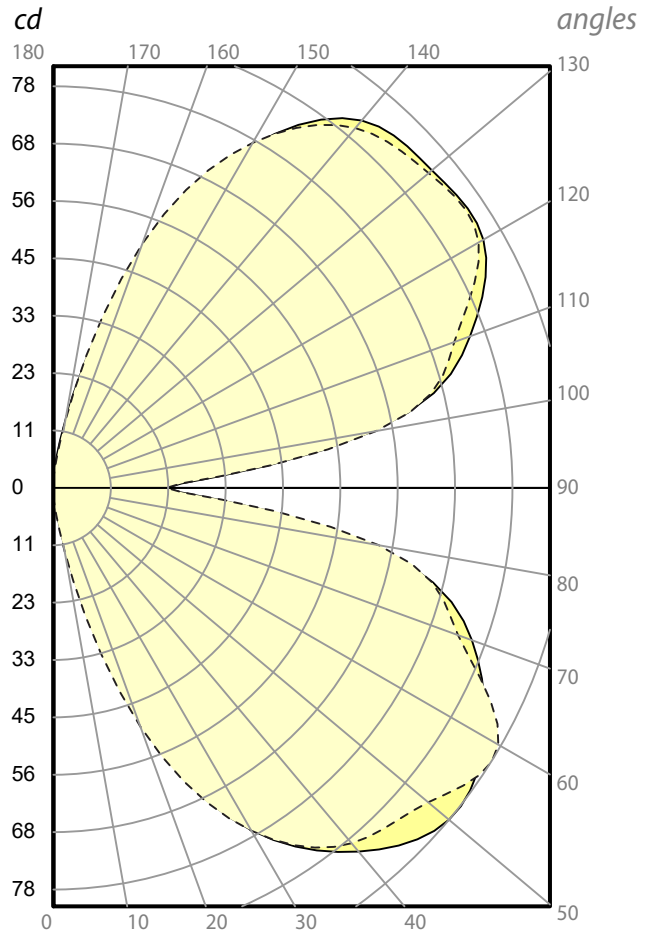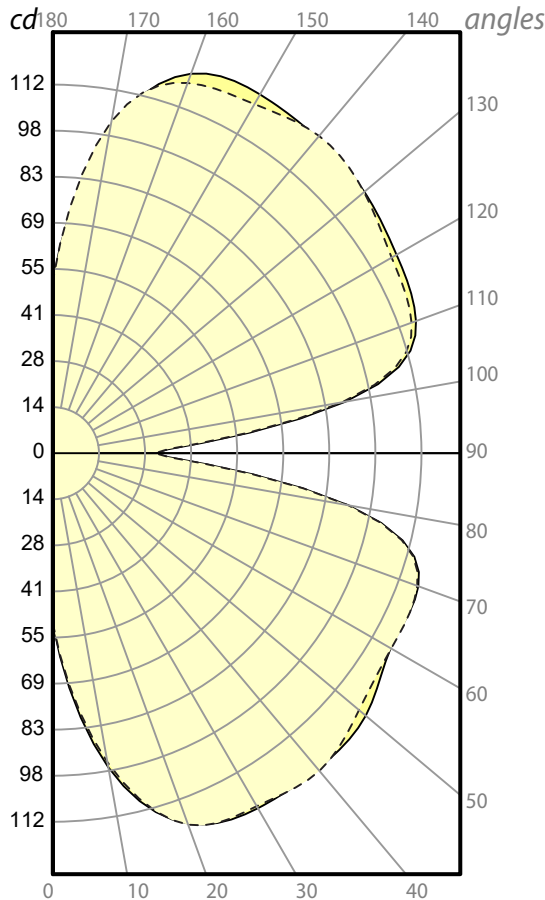

*System wattage includes driver and LED module consumption

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



225 de Liège Ouest, Suite #200
 Montréal (QC), Canada H2P 1H4
 Tel : 514.385.3515 Fax : 514.385.4169
 www.eurekalighting.com

4800-24 REG