

# PHOTOMETRIC REPORT

DUSK

## x132-48 -LED REG CHR-WH

CCT (K): 3500  
Delivered Lumens (lm): 3292  
System wattage (W)\*: 32W  
Distribution: Indirect  
Delivered Efficacy (lm/W): 102  
Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
Units: in (mm)  
0-180 Axis: 46.8(1188.72)  
90-270 Axis: 4.8 (121.92)  
Height: 1.2 (30.48)

\*System wattage include driver and LED module consumption



## x132-48 -LED HO CHR-WH

CCT (K): 3500  
Delivered Lumens (lm): 4799  
System wattage (W)\*: 50W  
Distribution: Indirect  
Delivered Efficacy (lm/W): 94  
Photometric type: C

### Luminous dimensions

Luminous shape: Rectangle  
Units: in (mm)  
0-180 Axis: 46.8(1188.72)  
90-270 Axis: 4.8 (121.92)  
Height: 1.2 (30.48)

\*System wattage include driver and LED module consumption

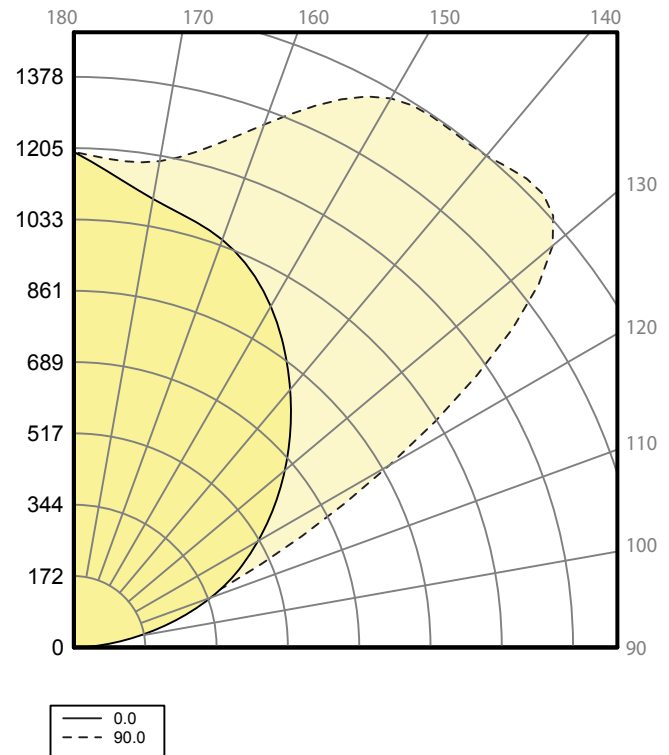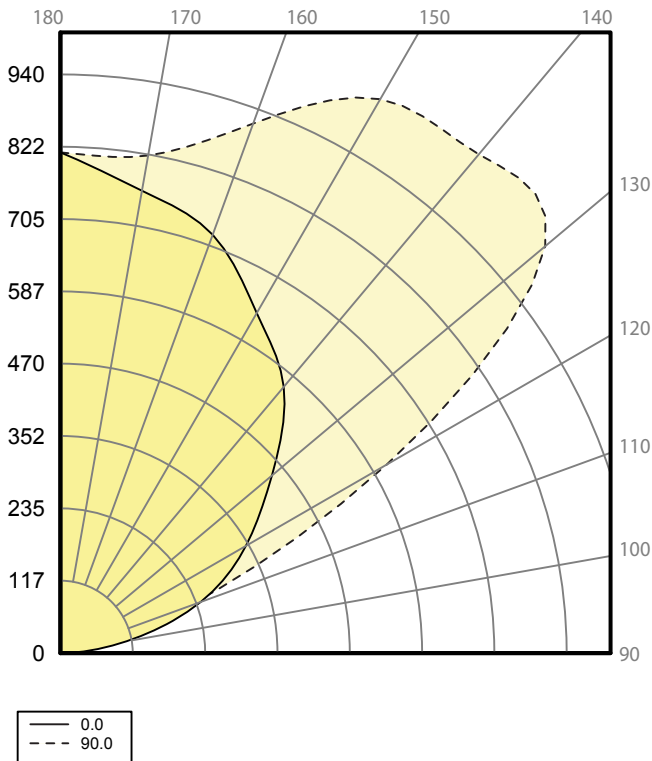

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



3132-48  
74132-48