

FOCUS 2047

PROJECTPROJET

SPEC TYPE

NOTES



OVERALL HEIGHTHAUTEUR HORS TOUT


LIGHT SOURCE	LED*	LED
MOUNTING	2401C	2403G
STEM	39.79"	41.04"
* FOR LED NON-IC INSTALLATION		

MOUNTING OPTIONSOPTIONS DE MONTAGE

2401C Ø4.50" x 0.50" Ø114 x 13mm	2403G Ø4.50" x 1.75" Ø114 x 44mm
--	--

STEM OR CABLE OPTIONSOPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	
--------------------------	--

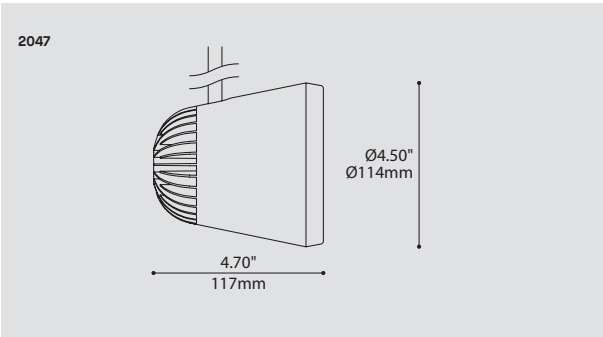

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		2047
2047	FOCUS	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.18		18W, LED
LED.25		25W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
BEAM ANGLE ANGLE DE FAISCEAU		
15	15°	
38	38°	
55	55°	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.	
STEM TIGE		
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
STEM LENGTH LONGUEUR DE TIGE		
36	36" STEM (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING MONTAGE		
RC	ROUND CANOPY / PAVILLON ROND	
RC-IC		FOR NON-IC INSTALLATION: 0.50" CANOPY (2401C)* FOR IC INSTALLATION: 1.75" CANOPY (2403G) *3983 ACCESSORY PROVIDED FOR 2401C
MOUNTING OPTION OPTION DE MONTAGE		
SCA	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)	
STRUCTURE FINISH FINI STRUCTURE ^(B)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
	^(B) INCLUDING CANOPY FINISH IF A CANOPY WAS SELECTED	
SHADE FINISH FINI ABAT-JOUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM

DIM






IES

LED

350°

90°

DESIGN:	Focus is simply the most powerful spotlight designed by Eureka! This performance is achievable through the combination of a clever heatsink construction, a high quality LED, a carbon thermal interface and an efficient reflector.
STRUCTURE:	The custom built heatsink was designed with hidden fins and an airflow channel that forces heat to smoothly navigate up to the top fins that are exposed to ambient air. Available with black or white architectural grade fine textured finish.
REFLECTOR:	Aluminum reflector with an impressive efficiency of 90% available with 15°, 38° or 55° beam angle (FWHM).
CERTIFIED:	c-CSA-us, c-UL-us

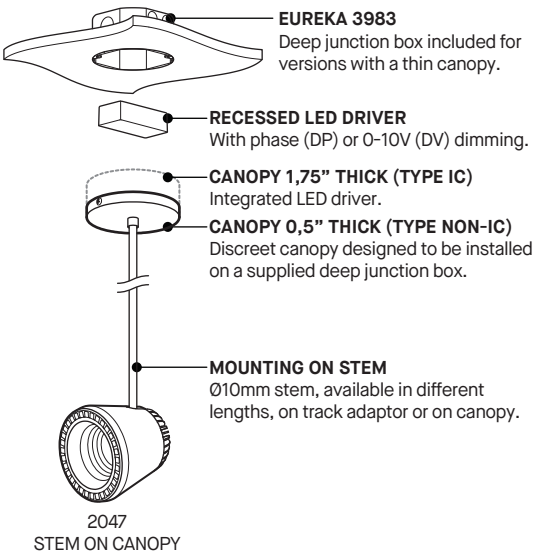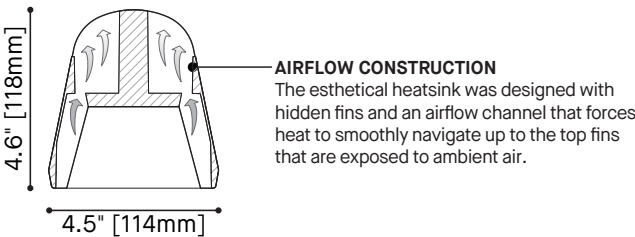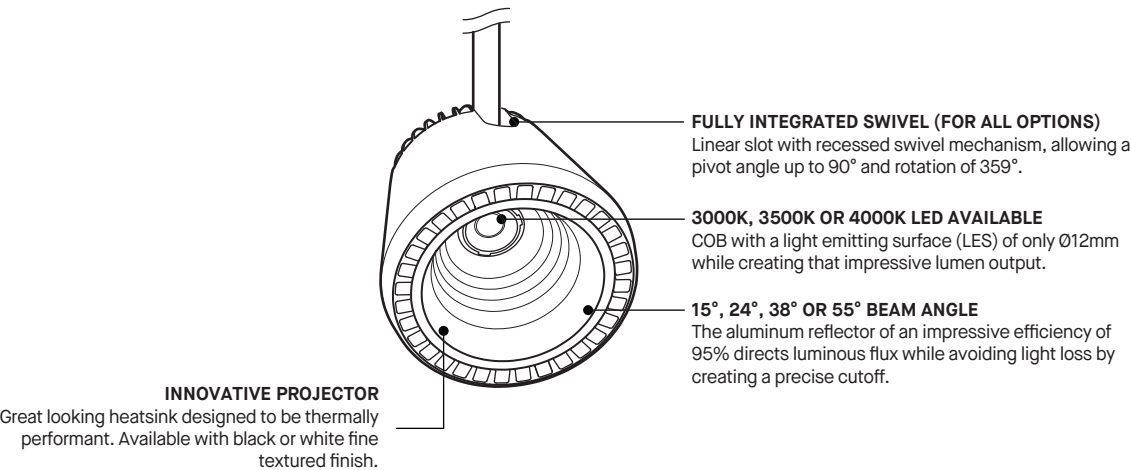



PRODUCT SPECIFICATION	LED 18W	LED 18W	LED 18W	LED 25W	LED 25W	LED 25W
PERFORMANCE						
SYSTEM WATTAGE	21.3W	21.3W	21.3W	30.6W	30.6W	30.6W
DELIVERED LUMENS (4000K)	2177 LM	2177 LM	2177 LM	2803 LM	2803 LM	2803 LM
EFFICACY	71.5LM/W	71.5LM/W	71.5 LM/W	91.6LM/W	91.6LM/W	91.6LM/W
OTHER INFORMATION						
BEAM ANGLE	15°	38°	55°	15°	38°	55°
LUMINAIRE'S WEIGHT	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.0
80+	3500K	1.0
80+	3000K	1.0
80+	2700K	N/A
90+	4000K	N/A
90+	3500K	N/A
90+	3000K	N/A
90+	2700K	N/A

LIGHT DISTRIBUTION

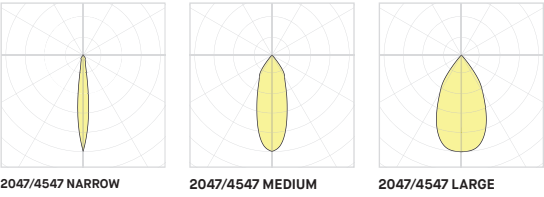


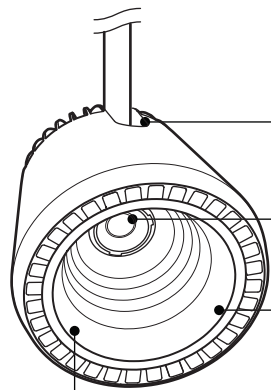


- PIVOT PLEINEMENT INTÉGRÉ (TOUTES VERSIONS)**
Mécanisme de pivot encastré dans une fente linéaire permettant un angle jusqu'à 90° et une rotation de 359°.
- DEL DE 3000K, 3500K OU 4000K**
COB ayant une surface d'émission de seulement Ø12mm, tout en émettant ce flux lumineux impressionnant.
- ANGLE DE FAISCEAU DE 15°, 24°, 38° OU 55°**
Le réflecteur en aluminium d'une impressionnante efficacité de 95% dirige le flux lumineux tout en évitant les pertes de lumière en créant une coupure précise.

PROJECTEUR INNOVANT


Dissipateur thermique conçu de façon à répondre à des objectifs de performance et d'esthétique. Disponible avec finition architecturale finement texturée noire ou blanche.



- CONSTRUCTION AVEC VENTILATION**
Le radiateur esthétique intègre des ailettes cachées et un canal de ventilation, qui pousse la chaleur vers la section supérieure exposée à l'air ambiant.



4547
PAVILLON (MURAL)



4547
PAVILLON (PLAFOND)



- EUREKA 3983**
Boîte de jonction profonde pour les versions sur pavillon mince.




- UNITÉ D'ALIMENTATION**
Gradation "phase" (DP) ou 0-10V (DV).



- PAVILLON 1,75" (TYPE IC)**
Unité d'alimentation DEL intégrée.



- PAVILLON 0,5" (TYPE NON-IC)**
Pavillon discret qui s'installe sur une boîte de jonction de profonde incluse.




- MONTAGE SUR TIGE**
Tige de Ø10mm, disponible en plusieurs longueurs, sur adaptateur de rail ou sur pavillon.
- 2047
TIGE SUR PAVILLON

SPÉCIFICATION PRODUIT	DEL 18W	DEL 18W	DEL 18W	DEL 25W	DEL 25W	DEL 25W
PERFORMANCE						
PUISSANCE TOTALE	21.3W	21.3W	21.3W	30.6W	30.6W	30.6W
LUMENS RÉELS (4000K)	2177 LM	2177 LM	2177 LM	2803 LM	2803 LM	2803 LM
EFFICACITÉ	71.5LM/W	71.5LM/W	71.5 LM/W	91.6LM/W	91.6LM/W	91.6LM/W
AUTRES INFORMATION						
ANGLE DE RAYONNEMENT	15°	38°	55°	15°	38°	55°
POIDS DU LUMINAIRE	SUR DEMANDE	SUR DEMANDE	SUR DEMANDE	SUR DEMANDE	SUR DEMANDE	SUR DEMANDE

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.0
80+	3500K	1.0
80+	3000K	1.0
80+	2700K	N/A
90+	4000K	N/A
90+	3500K	N/A
90+	3000K	N/A
90+	2700K	N/A

DISTRIBUTION LUMINEUSE

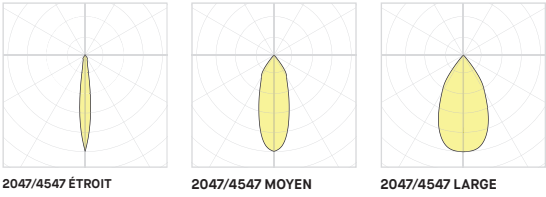

Visitez notre site Web pour les termes et conditions.