

SCOUT 4548

QUICKSHIP


PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE RDP

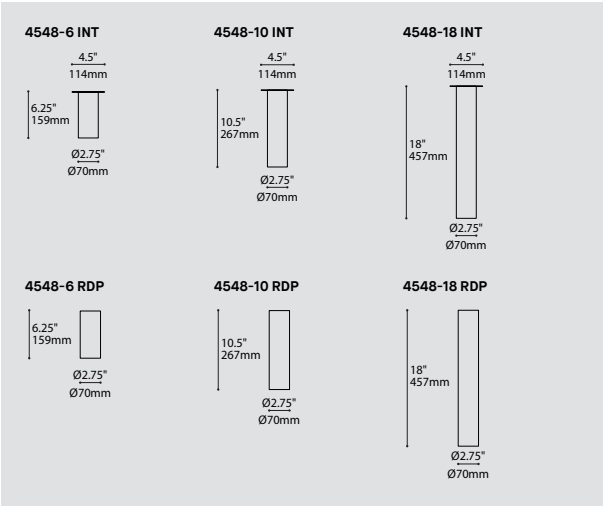

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL MODÈLE		
4548-6	SCOUT 6"	
4548-10	SCOUT 10"	
4548-18	SCOUT 18"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
BEAM ANGLE ANGLE DE FAISCEAU		
NA	NARROW (24°)	
ME	MEDIUM (45°)	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS	
FRO	FROSTED GLASS LENS	
HON	HONEYCOMB LOUVER	
SOL	SOLITE SOFTENING LENS	
DRIVER & CANOPY OPTION OPTION DE PILOTE & PAVILLON		
INT *	INTERNAL DRIVER, WITH FLAT CANOPY	
RDP	RECESSED DRIVER, NO CANOPY	
	*FOR 4548-6, DRIVER WILL BE IN DEEP JUNCTION BOX	
CANOPY FINISH FINI PAVILLON (A)		
WHE *	WHITE FINE TEXTURE	
	*IF NO FINISH IS SELECTED, FLAT CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH	
	(A) FILL IN IF INT DRIVER & CANOPY OPTION AND WHE FINISH IS SELECTED, OTHERWISE LEAVE EMPTY	
CYLINDER FINISH FINI CYLINDRE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
BAFFLE FINISH FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4548-6 WITH INT OPTION)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED RDP

Ø 2.5" (63.5mm)

CERTIFIED: c-CSA-us

SCOUT 4549

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH FINI



BLKE WHE

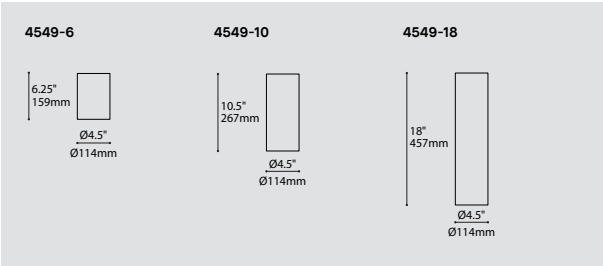


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL MODÈLE		
4549-6	SCOUT 6"	
4549-10	SCOUT 10"	
4549-18	SCOUT 18"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
BEAM ANGLE ANGLE DE FAISCEAU		
NA	NARROW (28°)	
ME	MEDIUM (48°)	
WI	WIDE (64°)	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		
CLR	CLEAR GLASS LENS	
FRO	FROSTED GLASS LENS	
HON	HONEYCOMB LOUVER	
SOL	SOLITE SOFTENING LENS	
CYLINDER FINISH FINI CYLINDRE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
BAFFLE FINISH FINI DÉFLECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4549-6)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

4548-6



6,25"
159mm


Ø2,75"
Ø70mm

4549-6



Ø4,5"
Ø114mm


4548-10



10,5"
267mm


Ø2,75"
Ø70mm

4549-10



Ø4,5"
Ø114mm


4548-18



18"
457mm

Ø2,75"
Ø70mm

4549-18



Ø4,5"
Ø114mm

3 MOUNTING OPTIONS

Quick ceiling installation with "twist & lock" system. Installation without flat canopy for tubes (RDP). Also available as pendant and wall mount.

6 FORMATS

Machined aluminium cylindrical structure.

16 CYLINDER AND BAFFLE FINISHES

Many options offered in fine textured or metallic finish to fit your needs.

2 DIMMING TYPE

Standard phase dimming (DP) or 0-10V dimming (DV). Integrated LED driver (454x-10 et 454x-18). Deep junction box (3983) included (454x-6).

2 OUTPUTS & 3 CCT

Extruded aluminium heatsink designed to efficiently offer regular and high output.

REFLECTORS & 3 OPTICAL ACCESSORIES

Narrow, medium or wide (xx49 only) beam angle reflector. Choice of optical accessories : clear lens, frosted lens or honeycomb louver.

4548-6

Deep junction box (3983) included, installation with Ø4,5"/Ø114mm flat canopy.

4548-10 & 4548-18

Standard junction box (not included), installation with Ø4,5"/Ø114mm flat canopy.

4548-6-RDP & 4548-10-RDP & 4548-18-RDP






xx48 tubes installed without flat canopy (perforation hole : Ø2 1/2"/Ø63.5mm)

4549-6

Deep junction box (3983) included

4549-10 & 4549-18

Standard junction box (not included)

PRODUCT SPECIFICATION	XX48-NA		XX48-ME		XX49-NA		XX49-ME		XX49-WI						
	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO					
PERFORMANCE															
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W					
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM					
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W					
OTHER INFORMATIONS															
BEAM ANGLE	24°		45°		28°		48°		64°						
LUMINAIRE'S WEIGHT	1.19KG / 1.38KG / 1.71KG 2.61LBS/ 3.03LBS/ 3.77LBS		1.19KG / 1.38KG / 1.71KG 2.61LBS/ 3.03LBS/ 3.77LBS		1.62KG / 1.99KG / 2.50KG 3.57LBS/ 4.37LBS/ 5.50LBS		1.62KG / 1.99KG / 2.50KG 3.57LBS/ 4.37LBS/ 5.50LBS		1.62KG / 1.99KG / 2.50KG 3.57LBS/ 4.37LBS/ 5.50LBS						
L70 (LUMEN MAINTENANCE)	> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS						
EFFICACY MULTIPLIERS															
CRI	CCT		FACTOR												
80+	4000K		1.0												
80+	3500K		0.99												
80+	3000K		0.97												
80+	2700K		0.94												
90+	4000K		0.89												
90+	3500K		0.86												
90+	3000K		0.84												
90+	2700K		0.80												
LIGHT DISTRIBUTION															
															
XX48 NARROW			XX48 MEDIUM			XX49 NARROW			XX49 MEDIUM						
															
									XX49 WIDE						
  Visit our website for warranty terms and conditions. 5 years warranty															



TECHNICAL DATA

All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification.

V1.2 — 2025.05

4548-6

4549-6

4548-10

4549-10

4548-18

4549-18

3 OPTIONS DE MONTAGE

Installation au plafond rapide grâce au système "twist & lock". Installation sans plaque disponible pour les tubes Ø2,75po/Ø70mm (RDP). Également disponible en version suspension et murale.

6 FORMATS

Structure cylindrique en aluminium usiné.

16 FINIS DE CYLINDRE ET DÉFLECTEUR

Plusieur options de finition architecturale finement texturée ou métallique pour tous vos besoins.

2 TYPES DE GRADATION

Gradation de type phase (DP) ou 0-10V (DV). Unité d'alimentation intégrée (modèles 454x-10 et 454x-18). Boîte de jonction octogonale profonde 3983 incluse (modèle 454x-6).

2 PUISSANCES & 3 TEMPÉRATURES DE COULEUR

Dissipateur thermique extrudé en aluminium efficace permettant d'offrir deux puissances différentes.

RÉFLECTEURS & 3 ACCESSOIRES OPTIQUES

Réflecteurs offrant un faisceaux lumineux étroit, moyen ou large (xx49 seulement). Choix d'accessoires optiques : lentille claire, lentille givrée ou grille en nid d'abeille.

4548-6
Boîte de jonction profonde (3983) incluse, installation avec plaque décorative de Ø4,5"/Ø114mm.

4548-10 & 4548-18
Boîte de jonction standard (non-incluse), installation avec plaque décorative de Ø4,5"/Ø114mm.

4548-6-RDP & 4548-10-RDP & 4548-18-RDP
Modèle xx48 installé sans plaque (trou de perforation Ø2 1/2" / Ø63.5mm)

4549-6
Boîte de jonction profonde (3983) incluse.

4549-10 & 4549-18
Boîte de jonction profonde (non-incluse).

SPÉCIFICATION PRODUIT		XX48-NA		XX48-ME		XX49-NA		XX49-ME		XX49-WI			
PERFORMANCE		REG	HO	REG	HO	REG	HO	REG	HO	REG	HO		
PUISSANCE TOTALE		9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W		
LUMENS RÉELS (4000K)		1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM		
EFFICACITÉ		110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W		
AUTRES INFORMATIONS													
ANGLE DE RAYONNEMENT		24°		45°		28°		48°		64°			
POIDS DU LUMINAIRE		1.19KG / 1.38KG / 1.71KG 2.61LBS/ 3.03LBS/ 3.77LBS		1.19KG / 1.38KG / 1.71KG 2.61LBS/ 3.03LBS/ 3.77LBS		1.62KG / 1.99KG / 2.50KG 3.57LBS/ 4.37LBS/ 5.50LBS		1.62KG / 1.99KG / 2.50KG 3.57LBS/ 4.37LBS/ 5.50LBS		1.62KG / 1.99KG / 2.50KG 3.57LBS/ 4.37LBS/ 5.50LBS			
L70 (MAINTENANCE DE LA LUMIÈRE)		> 63 600 H		> 63 600 H		> 63 600 H		> 63 600 H		> 63 600 H			
FACTEUR D'EFFICACITÉ		IRC		CCT		FACTEUR		DISTRIBUTION LUMINEUSE					
		80+	4000K			1.0							
		80+	3500K			0.99							
		80+	3000K			0.97							
		80+	2700K			0.94							
		90+	4000K			0.89							
		90+	3500K			0.86							
		90+	3000K			0.84							
		90+	2700K			0.80							
5 ans de garantie Visitez notre site Web pour les termes et conditions.													

DONNÉES TECHNIQUES

Tous droits réservés et tous les dessins protégés par le droit d'auteur. Eureka Lighting se réserve le droit de changer ou de modifier les spécifications sans préavis.

V1.2 — 2025.05