

MILL UNLIT SUSPENDED

QUICKSHIP

PROJECT PROJET

SPEC TYPE


NOTES



SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

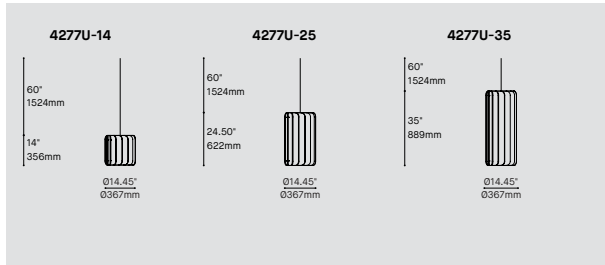

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4277U-14 MILL UNLIT (Ø14" X 14")
 4277U-25 MILL UNLIT (Ø14" X 25")
 4277U-35 MILL UNLIT (Ø14" X 35")

CABLE CÂBLE

AC AIRCRAFT MOUNTING, FIELD ADJUSTABLE

AC

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)
 ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

SHADE FINISH FINI ABAT-JOUR

ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE <small>*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE</small>				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:

MILL is a fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.

INSTALLATION:

Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.

SHADE:

The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø14" INDIRECT PENDANT

QUICKSHIP

PROJECT PROJET

SPEC TYPE


NOTES



SHADE FINISH FINI ABAT-JOUR



MOUNTING OPTIONS OPTIONS DE MONTAGE



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

42771-14 MILL INDIRECT (Ø14" X 14")
 42771-25 MILL INDIRECT (Ø14" X 25")
 42771-35 MILL INDIRECT (Ø14" X 35")

LIGHT SOURCE SOURCE LUMINEUSE

LED.REG REGULAR OUTPUT INDIRECT
 LED.HO HIGH OUTPUT INDIRECT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)

CABLE CÂBLE

AC AIRCRAFT MOUNTING, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)
 ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC1 ROUND CANOPY / PAVILLON ROND
 SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RCC CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK BLACK POWER CORD
 WH WHITE POWER CORD
 CLR CLEAR POWER CORD

SHADE FINISH FINI ABAT-JOUR

ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		

Acoustic Material Color Options for Mill




Standard colors



ABF
Azure Blue




AWF
Arctic White



BBF
Basic Black



BOF
Blood Orange




BTF
Battleship Gray




BYF
Banana Yellow




CHF
Charcoal



NBF
Navy Blue



OBF
Ocean Blue




PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BGF
Bubble Gum



BKF
Bark Brown




DBF
Denim Blue



DTF
Deep Teal Green




DYF
Daisy Yellow




GGF
Grass Green




LBF
Light Beige




LGF
Lime Green



MGF
Moss Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple



SBF
Sky Blue




TOF
Tangerine Orange



TPF
Tulip Purple


- Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
- Due to the dye process, colors may vary slightly from batch to batch.

MILL UNLIT

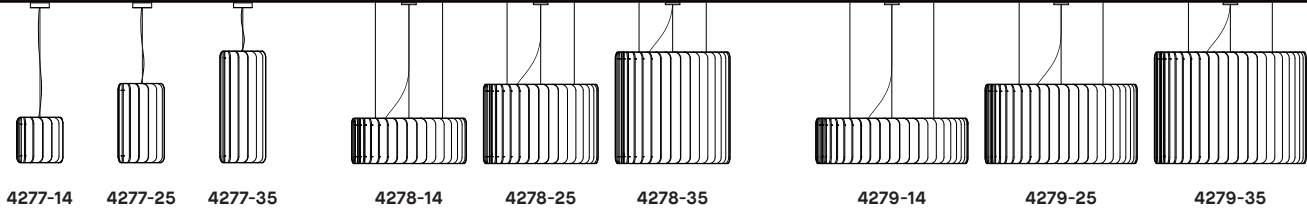

NOISE REDUCTION


The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire. The panels are available in 30 colors. For all color options, refer to the Acoustic Material Color Options page.

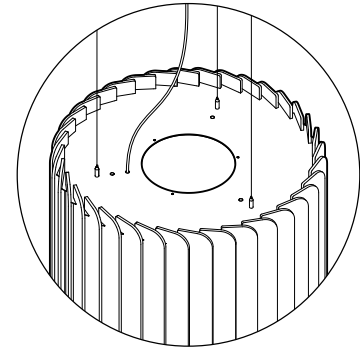

427XI

TRUE UPLIGHT

The suspended version offers an optional light source with great uplight performance. We recommend a minimum suspension of 22" for a diffused uplight.

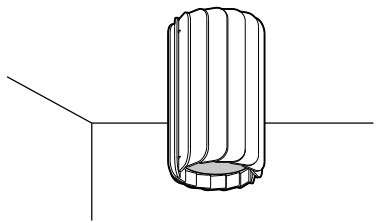

TWO MOUNTING OPTIONS

The fixture can be suspended or surface mounted depending of the space needs.


RECYCLED PANELS

Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.



FELT ACCENT

A felt disc adds an additional sound-absorbing element.

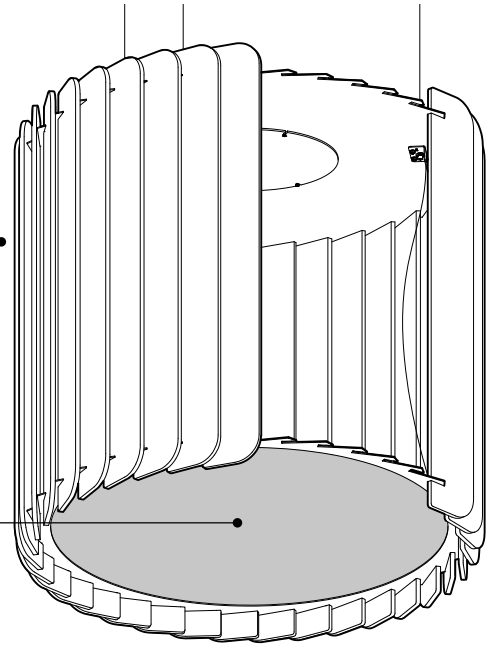

CLEANING

A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do not use any abrasive, soap, or chemical cleaner.

PRODUCT SPECIFICATION

Ø14" INDIRECT


Ø36" / Ø47" INDIRECT

PERFORMANCE	REG	HO	REG	HO
SYSTEM WATTAGE	14.4W	20.6W	19W	29W
DELIVERED LUMENS (4000K)	1121 LM	1525 LM	1408 LM	2051 LM
OTHER INFORMATION			Ø36"	Ø47"
WEIGHT	10LBS / 4KG		30LBS / 13KG	40LBS / 18KG
L70 (LUMEN MAINTENANCE)	55,000		54,700	60,000
WELL & LEED STANDARD REQUIREMENTS				
LIGHT QUALITY	R9 > 50 (WITH 4000K)			

EFFICACY MULTIPLIERS

LIGHT DISTRIBUTION

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

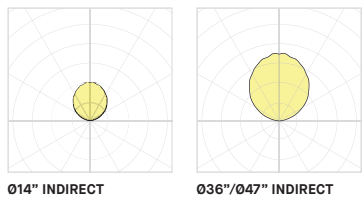


Visit our website for warranty terms and conditions.




TECHNICAL DATA

MILL UNLIT

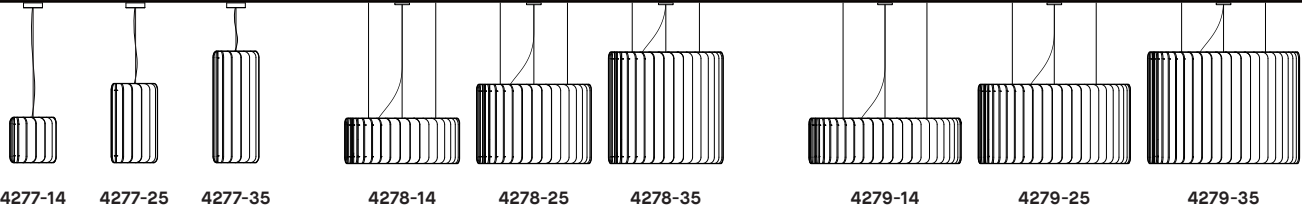

ATTÉNUATION DU BRUIT

La superposition des panneaux verticaux augmente la surface effective du matériel insonorisant, optimisant les performances acoustiques du luminaire. Les panneaux sont disponibles en 30 couleurs. Pour toutes options de couleurs, consulter la page d'options de couleurs de matérielle acoustique.

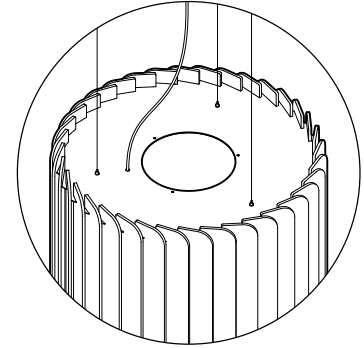


427XI

SOURCE INDIRECTE PUISSANTE

La version suspension offre en option une source lumineuse pour offrir un éclairage indirect performant. Nous recommandons une suspension minimum de 22" pour avoir une lumière indirecte diffuse.

NETTOYAGE

Un nettoyage approprié et régulier contribuera à prolonger la durée de vie des produits acoustiques. Un nettoyage périodique peut être fait avec un aspirateur ou en essuyant avec un chiffon humide. Ne pas utiliser de produits abrasifs, de savon ou de produits nettoyants chimiques.

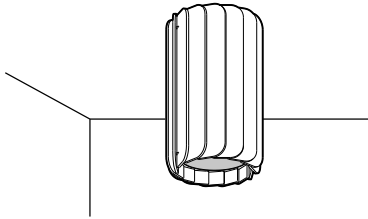

DEUX OPTIONS DE MONTAGE

Le luminaire peut être suspendu ou monté en surface selon les besoins de l'espace.


PANNEAUX RECYCLÉS

Panneaux composés de fibres de polyester (PET) avec 42% de matière recyclées. 100% recyclable, non-toxique, non-allergène et non-irritable. Faible teneur en COV et résistance au feu.



ACCENT DE FEUTRE

Un disque de feutre ajoute un élément d'atténuation de bruit supplémentaire.

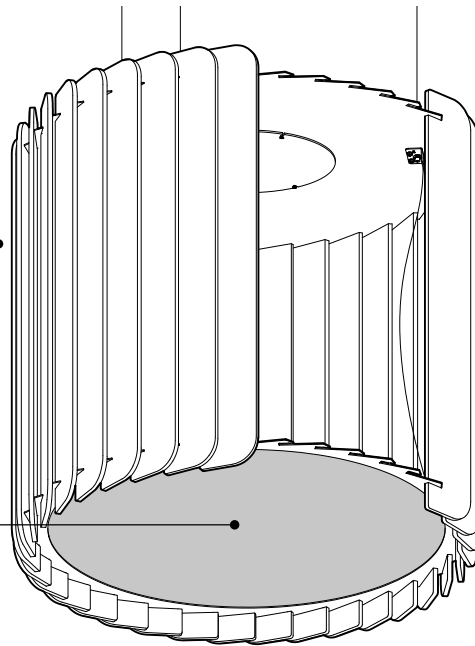

SPÉCIFICATION PRODUIT

Ø14" INDIRECT


Ø36" / Ø47" INDIRECT

PERFORMANCE	REG	HO	REG	HO
PUISSANCE TOTALE	14.4W	20.6W	19W	29W
LUMENS RÉELS (4000K)	1121 LM	1525 LM	1408 LM	2051 LM
AUTRES INFORMATION			Ø36"	Ø47"
POIDS	10LBS / 4KG		30LBS / 13KG	40LBS / 18KG
L70 (MAINTENANCE DE LA LUMIÈRE)	55,000		54,700	60,000
CRITÈRES DE CERTIFICATION WELL				
QUALITÉ DE LA LUMIÈRE	R9 > 50 (AVEC 4000K)			


FACTEUR D'EFFICACITÉ

DISTRIBUTION LUMINEUSE

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Ø14" INDIRECT



Ø36"/Ø47" INDIRECT



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES