

MILL 047" SUSPENDED

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE


NOTES



SHADE FINISH FINI ABAT-JOUR



MOUNTING OPTIONS OPTIONS DE MONTAGE

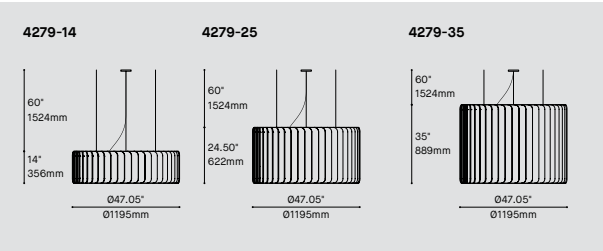

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE					CODE
QUICKSHIP					
QS10	QUICKSHIP 10 DAYS - MAXIMUM 5 UNITS QUICKSHIP 10 JOURS - MAXIMUM 5 UNITÉS				
MODEL MODÈLE					
4279D-14	MILL 14" (DIRECT)				
4279D-25	MILL 25" (DIRECT)				
4279D-35	MILL 35" (DIRECT)				
4279DI-14	MILL 14" (DIRECT + INDIRECT)				
4279DI-25	MILL 25" (DIRECT + INDIRECT)				
4279DI-35	MILL 35" (DIRECT + INDIRECT)				
LIGHT SOURCE SOURCE LUMINEUSE					
4279D-XX					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4279DI-XX					
LED.LO.REG	LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
30	3000K				
35	3500K				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)					90
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					DV
DV	0-10V DIMMING (120V-277V)				
CABLE CÂBLE					AC
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING MONTAGE					RC1
RC1	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE					RCC
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
DIFFUSER FINISH FINI DIFFUSEUR					WH
WH	WHITE				


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




Acoustic Material Color Options for Mill




Standard colors



ABF
Azure Blue




AWF
Arctic White



BBF
Basic Black



BOF
Blood Orange




BTF
Battleship Gray




BYF
Banana Yellow




CHF
Charcoal




NBF
Navy Blue



OBF
Ocean Blue



PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BGF
Bubble Gum



BKF
Bark Brown



DBF
Denim Blue



DTF
Deep Teal Green



DYF
Daisy Yellow




GGF
Grass Green




LBF
Light Beige



LGF
Lime Green




MGF
Moss Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple



SBF
Sky Blue




TOF
Tangerine Orange



TPF
Tulip Purple

- Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
- Due to the dye process, colors may vary slightly from batch to batch.


MILL 036" / 047"

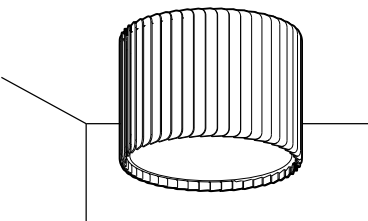

TWO MOUNTING OPTIONS

The fixture can be suspended or surface mounted depending of the space needs.

CANOPY POSITION



RCC


RECYCLED PANELS

Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.





FLEXIBLE ENGINES

LOW, REG and HIGH output light engine allows for a wide range of applications.

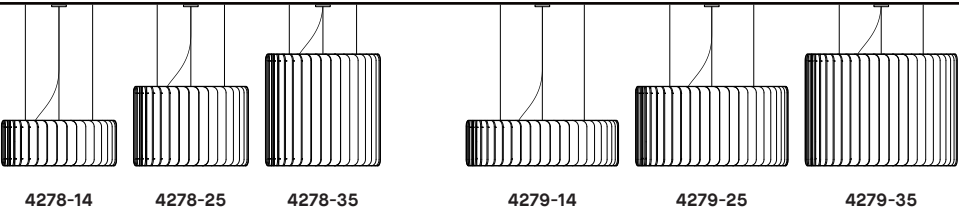

NOISE REDUCTION

The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire. The panels are available in 30 colors. For all color options, refer to the Acoustic Material Color Options page.

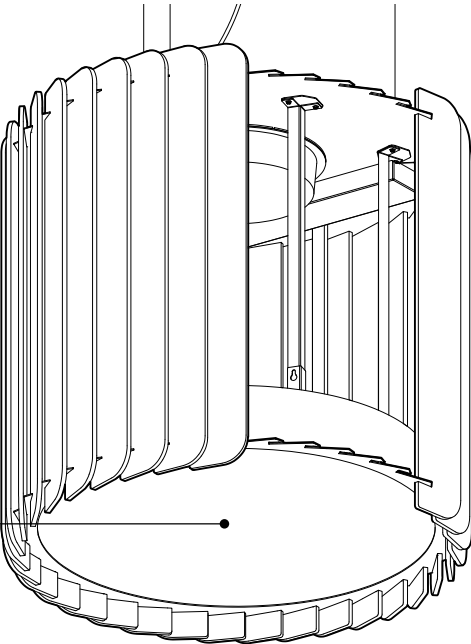

427X-DI

TRUE UPLIGHT

The suspended version offers an optional second light source with great uplight performance. Both light sources can be dimmed separately. We recommend a minimum suspension of 22" for a diffused uplight.

CLEANING

A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do not use any abrasive, soap, or chemical cleaner.

PRODUCT SPECIFICATION

036" DIRECT

047" DIRECT


036"/ 047" INDIRECT

PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
SYSTEM WATTAGE	56W	82W	121W	128W	185W	276W	19W	29W
DELIVERED LUMENS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
OTHER INFORMATION								
WEIGHT	40LBS / 18KG			60LBS / 27KG				
L70 (LUMEN MAINTENANCE)	60,000			54,700				
WELL & LEED STANDARD REQUIREMENTS								
MAX. LUMINANCE 45°-90° OF NADIR	1150 CD/M² (AT HO)							
LIGHT QUALITY	R9 > 50 (WITH 4000K)							

EFFICACY MULTIPLIERS


CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

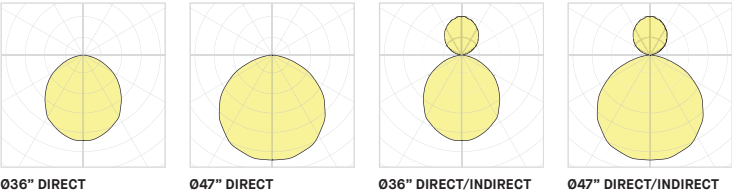

Visit our website for warranty terms and conditions.



MILL 036" / 047"

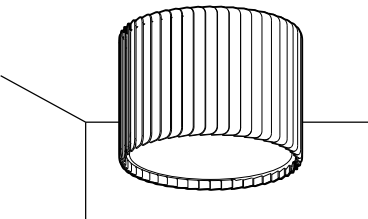

DEUX OPTIONS DE MONTAGE

Le luminaire peut être suspendu ou monté en surface selon les besoins de l'espace.

POSITION CANOPY



RCC


PANNEAUX RECYCLÉS

Panneaux composés de fibres de polyester (PET) avec 42% de matière recyclées. 100% recyclable, non-toxique, non-allergène et non-irritable. Faible teneur en COV et résistance au feu.



SOURCES POLYVALENTES

Source LOW, REG et HO permettent une grande variété d'applications.

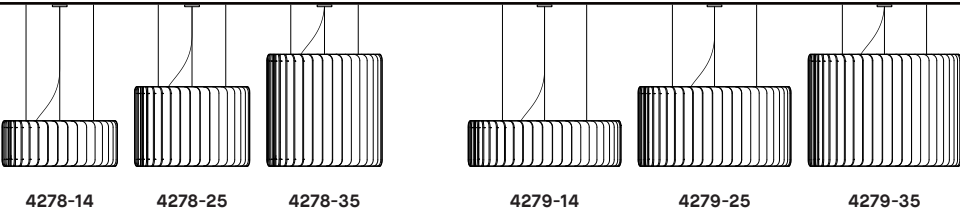

4278-14

4278-25

4278-35

4279-14



4279-25

4279-35



ATTÉNUATION DU BRUIT

La superposition des panneaux verticaux augmente la surface effective du matériel insonorisant, optimisant les performances acoustiques du luminaire. Les panneaux sont disponibles en 30 couleurs. Pour toutes options de couleurs, consulter la page d'options de couleurs de matérielle acoustique.

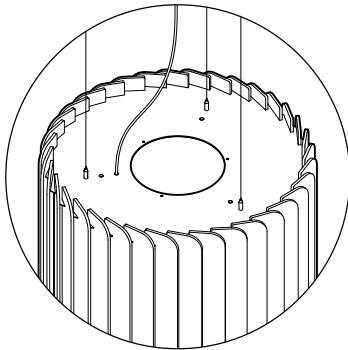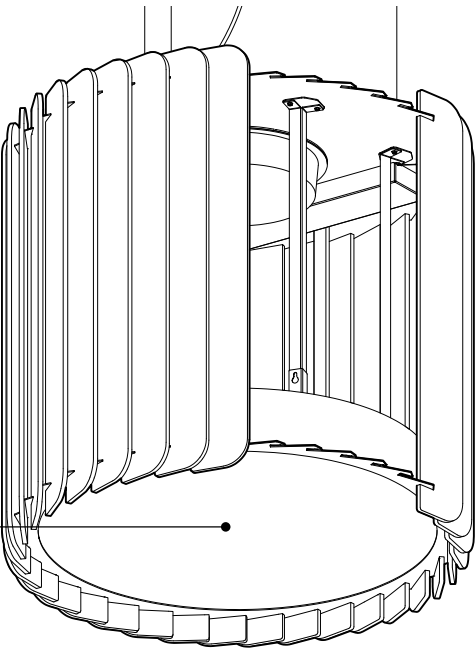

427X-DI

SOURCE INDIRECTE PUISSANTE

La version suspension offre en option une seconde source lumineuse pour offrir un éclairage indirect performant. Les deux sources peuvent se régler séparément. Nous recommandons une suspension minimum de 22" pour avoir une lumière indirecte diffuse.

NETTOYAGE

Un nettoyage approprié et régulier contribuera à prolonger la durée de vie des produits acoustiques. Un nettoyage périodique peut être fait avec un aspirateur ou en essuyant avec un chiffon humide. Ne pas utiliser de produits abrasifs, de savon ou de produits nettoyants chimiques.

SPÉCIFICATION PRODUIT

036" DIRECT

047" DIRECT


036" / 047" INDIRECT

PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
PUISSANCE TOTALE	56W	82W	121W	128W	185W	276W	19W	29W
LUMENS RÉELS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
AUTRES INFORMATION								
POIDS	40LBS / 18KG			60LBS / 27KG				
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000			54,700				
CRITÈRES DE CERTIFICATION WELL								
MAX. LUMINANCE 450-900 NADIR	1 150CD/M² (EN HO)							
QUALITÉ DE LA LUMIÈRE	R9 > 50 (OPTION 90 IRC)							


FACTEUR D'EFFICACITÉ

DISTRIBUTION LUMINEUSE


IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91




036" DIRECT



047" DIRECT



036" DIRECT/INDIRECT



047" DIRECT/INDIRECT



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES