

MILL Ø36" SURFACE

QUICKSHIP


PROJECTPROJET

SPEC TYPE

NOTES



SHADE FINISHFINI ABAT-JOUR

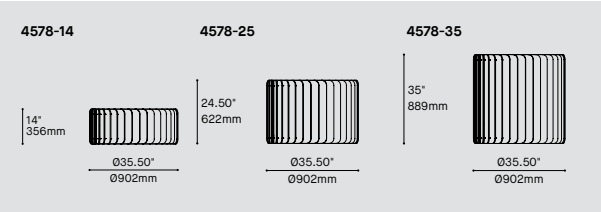

ORDERING SPECIFICATION					SPÉCIFICATION DE COMMANDE					CODE	
QUICKSHIP											
QS10		QUICKSHIP 10 DAYS - MAXIMUM 5 UNITS					QUICKSHIP 10 JOURS - MAXIMUM 5 UNITÉS				
MODEL		MODÈLE									
4578-14		MILL 14"									
4578-25		MILL 25"									
4578-35		MILL 35"									
LIGHT SOURCE		SOURCE LUMINEUSE									
LED.LO		LOW OUTPUT									
LED		REGULAR OUTPUT									
LED.HO		HIGH OUTPUT									
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR									
30		3000K									
35		3500K									
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)								90	
90		90+ CRI									
VOLTAGE		VOLTAGE									
120V		120 VOLT									
277V		277 VOLT									
CONTROL OPTION		OPTION DE CONTRÔLE								DV	
DV		0-10V DIMMING (120V-277V)									
SHADE FINISH		FINI ABAT-JOUR									
ABF		AZURE BLUE FELT		BYF		BANANA YELLOW FELT		REF		RED FELT	
AWF		ARCTIC WHITE FELT		CHF		CHARCOAL FELT		SGF		SILVER GRAY FELT	
BBF		BASIC BLACK FELT		NBF		NAVY BLUE FELT		TGF		TITANIUM GRAY FELT	
BOF		BLOOD ORANGE FELT		OBF		OCEAN BLUE FELT		ZFF		ZINFANDEL FELT	
BTF		BATTLESHIP GRAY FELT		PGF		PEAR GREEN FELT					
DIFFUSER FINISH		FINI DIFFUSEUR								WH	
WH		WHITE									

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN: MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
- INSTALLATION: Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
- LIGHT SOURCE: This pendant offers powerful and evenly diffused lighting with a COB light source. Phase or 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
- SHADE: The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.


Acoustic Material Color Options for Mill




Standard colors



ABF
Azure Blue




AWF
Arctic White



BBF
Basic Black



BOF
Blood Orange




BTF
Battleship Gray




BYF
Banana Yellow



CHF
Charcoal




NBF
Navy Blue



OBF
Ocean Blue



PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BGF
Bubble Gum



BKF
Bark Brown



DBF
Denim Blue



DTF
Deep Teal Green



DYF
Daisy Yellow




GGF
Grass Green




LBF
Light Beige



LGF
Lime Green




MGF
Moss Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple



SBF
Sky Blue




TOF
Tangerine Orange



TPF
Tulip Purple

- Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
- Due to the dye process, colors may vary slightly from batch to batch.



MILL 036" / 047"

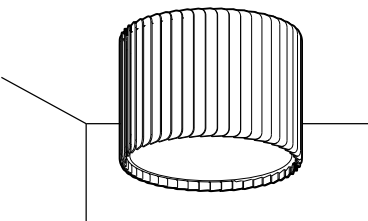

TWO MOUNTING OPTIONS

The fixture can be suspended or surface mounted depending of the space needs.

CANOPY POSITION



RCC


RECYCLED PANELS

Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.





FLEXIBLE ENGINES

LOW, REG and HIGH output light engine allows for a wide range of applications.

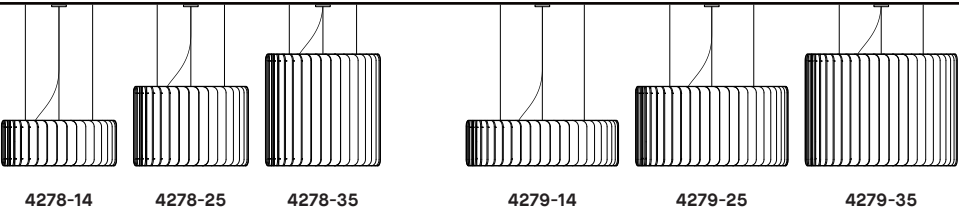

NOISE REDUCTION

The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire. The panels are available in 30 colors. For all color options, refer to the Acoustic Material Color Options page.

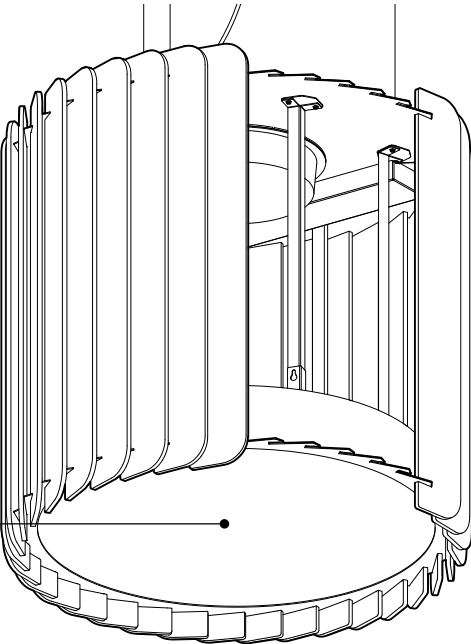

427X-DI

TRUE UPLIGHT

The suspended version offers an optional second light source with great uplight performance. Both light sources can be dimmed separately. We recommend a minimum suspension of 22" for a diffused uplight.

CLEANING

A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do not use any abrasive, soap, or chemical cleaner.

PRODUCT SPECIFICATION

036" DIRECT

047" DIRECT


036"/ 047" INDIRECT

PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
SYSTEM WATTAGE	56W	82W	121W	128W	185W	276W	19W	29W
DELIVERED LUMENS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
OTHER INFORMATION								
WEIGHT	40LBS / 18KG			60LBS / 27KG				
L70 (LUMEN MAINTENANCE)	60,000			54,700				
WELL & LEED STANDARD REQUIREMENTS								
MAX. LUMINANCE 45°-90° OF NADIR	1 150 CD/M² (AT HO)							
LIGHT QUALITY	R9 > 50 (WITH 4000K)							

EFFICACY MULTIPLIERS


CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

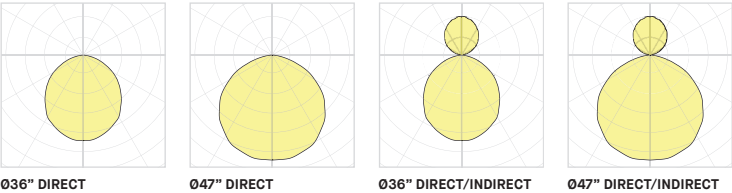

Visit our website for warranty terms and conditions.



MILL 036" / 047"

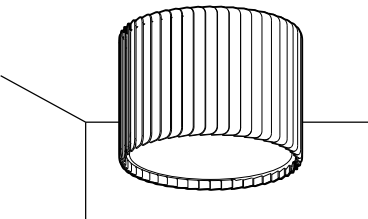

DEUX OPTIONS DE MONTAGE

Le luminaire peut être suspendu ou monté en surface selon les besoins de l'espace.

POSITION CANOPY



RCC


PANNEAUX RECYCLÉS

Panneaux composés de fibres de polyester (PET) avec 42% de matière recyclées. 100% recyclable, non-toxique, non-allergène et non-irritable. Faible teneur en COV et résistance au feu.



SOURCES POLYVALENTES

Source LOW, REG et HO permettent une grande variété d'applications.

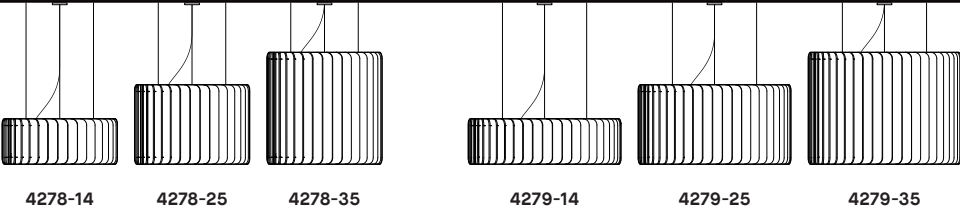

4278-14

4278-25

4278-35

4279-14



4279-25

4279-35



ATTÉNUATION DU BRUIT

La superposition des panneaux verticaux augmente la surface effective du matériel insonorisant, optimisant les performances acoustiques du luminaire. Les panneaux sont disponibles en 30 couleurs. Pour toutes options de couleurs, consulter la page d'options de couleurs de matérielle acoustique.

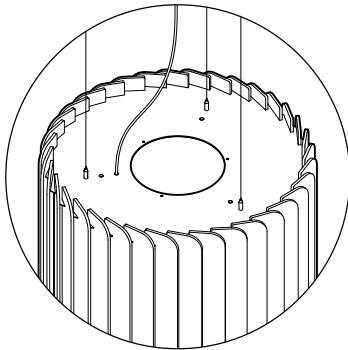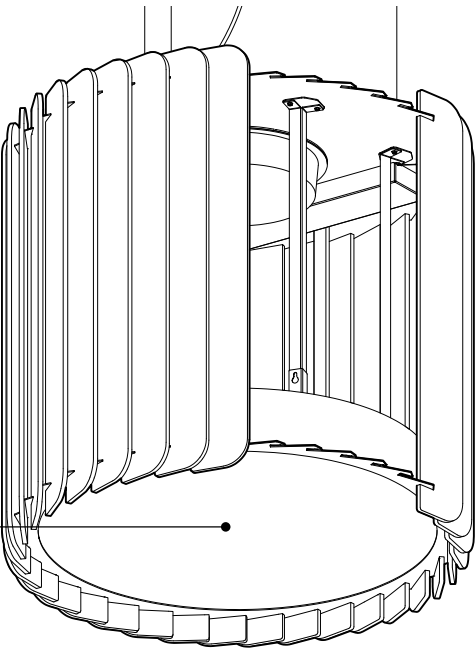

427X-DI

SOURCE INDIRECTE PUISSANTE

La version suspension offre en option une seconde source lumineuse pour offrir un éclairage indirect performant. Les deux sources peuvent se régler séparément. Nous recommandons une suspension minimum de 22" pour avoir une lumière indirecte diffuse.

NETTOYAGE

Un nettoyage approprié et régulier contribuera à prolonger la durée de vie des produits acoustiques. Un nettoyage périodique peut être fait avec un aspirateur ou en essuyant avec un chiffon humide. Ne pas utiliser de produits abrasifs, de savon ou de produits nettoyants chimiques.

SPÉCIFICATION PRODUIT

036" DIRECT

047" DIRECT


036" / 047" INDIRECT

PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
PUISSANCE TOTALE	56W	82W	121W	128W	185W	276W	19W	29W
LUMENS RÉELS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
AUTRES INFORMATION								
POIDS	40LBS / 18KG			60LBS / 27KG				
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000			54,700				
CRITÈRES DE CERTIFICATION WELL								
MAX. LUMINANCE 450-900 NADIR	1 150CD/M² (EN HO)							
QUALITÉ DE LA LUMIÈRE	R9 > 50 (OPTION 90 IRC)							


FACTEUR D'EFFICACITÉ

DISTRIBUTION LUMINEUSE


IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91




036" DIRECT



047" DIRECT



036" DIRECT/INDIRECT



047" DIRECT/INDIRECT



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES