
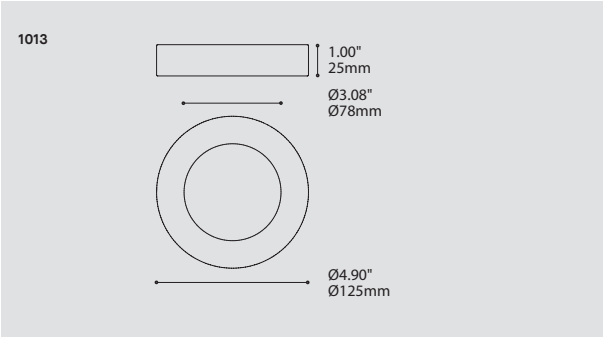


PROJECT PROJÉT

SPEC TYPE

NOTES

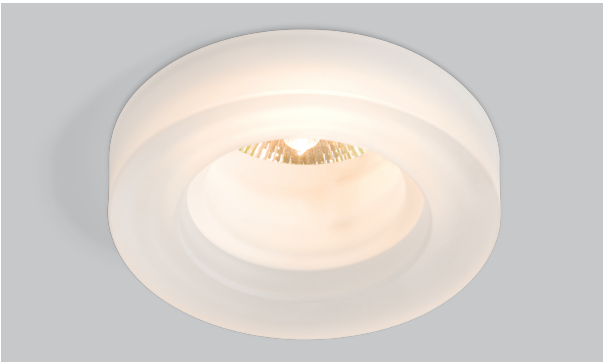


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
A complete unit consists of a trim (A) and a housing (C) selected according to light source, using the matrix below. Additionally, use section (B) to specify Eureka LED Modules.		
(A) TRIM ORDERING COMMANDE ENCASTRÉ		
MODEL MODÈLE		1013
1013	FREEZE 2	
DIFFUSER FINISH FINI DIFFUSEUR		FRO
FRO	FROSTED	
(B) LED ORDERING COMMANDE DEL		
EUREKA LED MODULES MODULES DEL EUREKA		LED.4.TL
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.4.TL		4W, LED (TWIST & LOCK MODULE)
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
ANGLE BEAM ANGLE DE FAISCEAU		
17	17°	
48	48°	
(C) HOUSING ORDERING COMMANDE BOÎTIER		
HOUSINGS BOÎTIERS		
Select housing code in matrix below based on light source, voltage options and housing type		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

DIM	LED	
ø 3.50" (89mm)		
DESIGN:	The clean, architectural design of this glass trim permits easy re-lamping.	
INSTALLATION:	Functions with remodeling, new construction or air-tight insulated ceiling housings (sold separately).	
STRUCTURE:	Pressed glass with etched surfaces with twist & lock mounting.	
OPTIC:	LED modules are supplied with Total Internal Reflecting (TIR) Lenses.	
CERTIFIED:	c-UL-us, Damp rated (Interior only - mild spray - no sauna)	
CONCEPTION:	Encastré de verre, simple et architectural permettant un remplacement facile de la lampe.	
INSTALLATION:	Conçu pour utilisation avec boîtier de type rénovation, nouvelle construction ou plafond hermétique isolé (boîtier vendu séparément).	
STRUCTURE:	Verre pressé et givré par traitement à l'acide avec verrouillage par rotation.	
OPTIQUE:	Modules DEL fournis avec lentilles à réflexion totale interne (RTI). Diffuseur en verre trempé fourni pour utilisation avec ampoules MR16 si requis.	
CERTIFIÉ:	c-UL-us, Emplacement humide (Intérieur seulement - légère exposition à l'eau - pas de sauna)	

HOUSING SELECTION MATRIX MATRICE DE SÉLECTION DU BOÎTIER

LIGHT SOURCE SOURCE LUMINEUSE	VOLTAGE VOLTAGE	REMODELING RÉNOVATION	NEW INSTALLATION NOUVELLE INSTALLATION
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
			
4W, EUREKA LED MODULE, Phase Dimming	120V ELECT.	1524C-9.35TL.4.DP	1604C-9.35TL.4.DP
4W, EUREKA LED MODULE, 0-10V Dimming	120-277V ELECT.	1524C-9.35TL.4.DV.8	1604C-9.35TL.4.DV.8

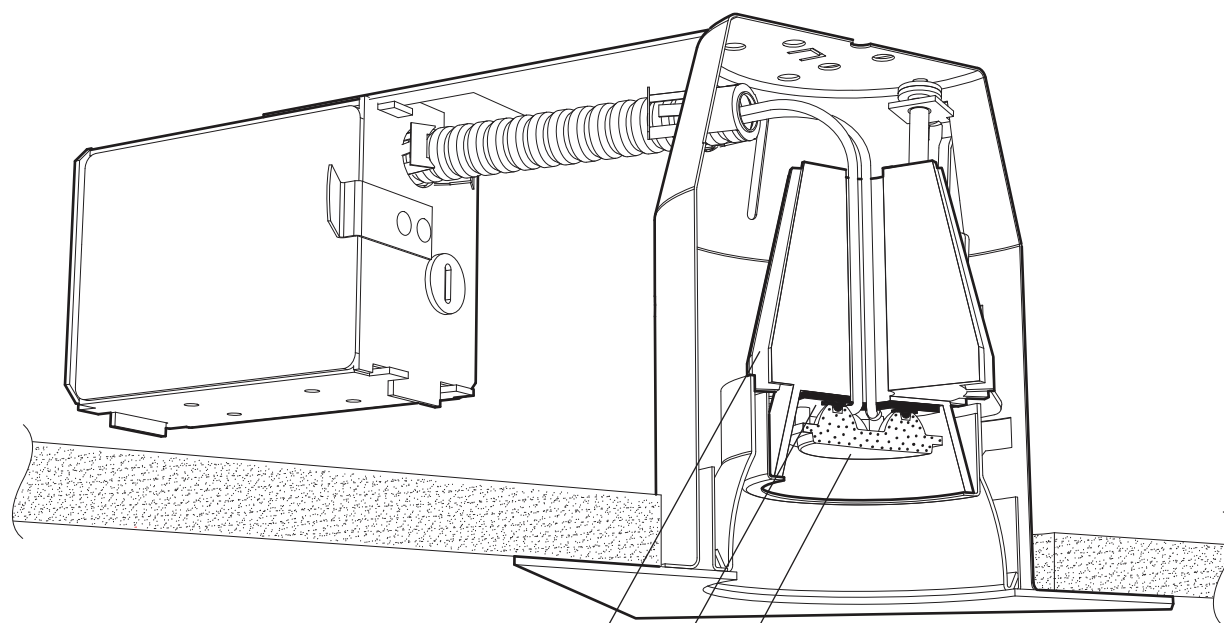


HEATSINK
Customized Eureka design


LED MODULE
4 x Nichia NVSL219BT-V1
Available in 4w

OPTIC
Ledil total internal reflection (tir)
20° & 38° total beam angle

EUREKA COMPATIBLE
Fits most Eureka trims and
available for all housing types



REMODELING



NEW CONSTRUCTION

SPECIFICATIONS

4w

LED EMITTER	4 x Nichia NVSL219BT-V1 (5w total system wattage)
OPTIC	LEDIL TIR - 20° & 38° total beam angle
MODULE	UL recognized - made in USA
LUMENS (DELIVERED)	400 lm
EFFICACY	100 lm/w
CCT	ANSI 3-Step MacAdam Ellipse Binning
CRI	84 CRI
DRIVER (NON-DIMMING)	350 mA Constant Current
DRIVER (DIMMING)	0-10V Dimming / Phase Dimming
VOLTAGE	120V or 277V
L70 / LM-79	More than 60 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year


*Please consult factory for dimming & controller options.




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




LED.4.XX.XX
LED.4.XX.XX.TL

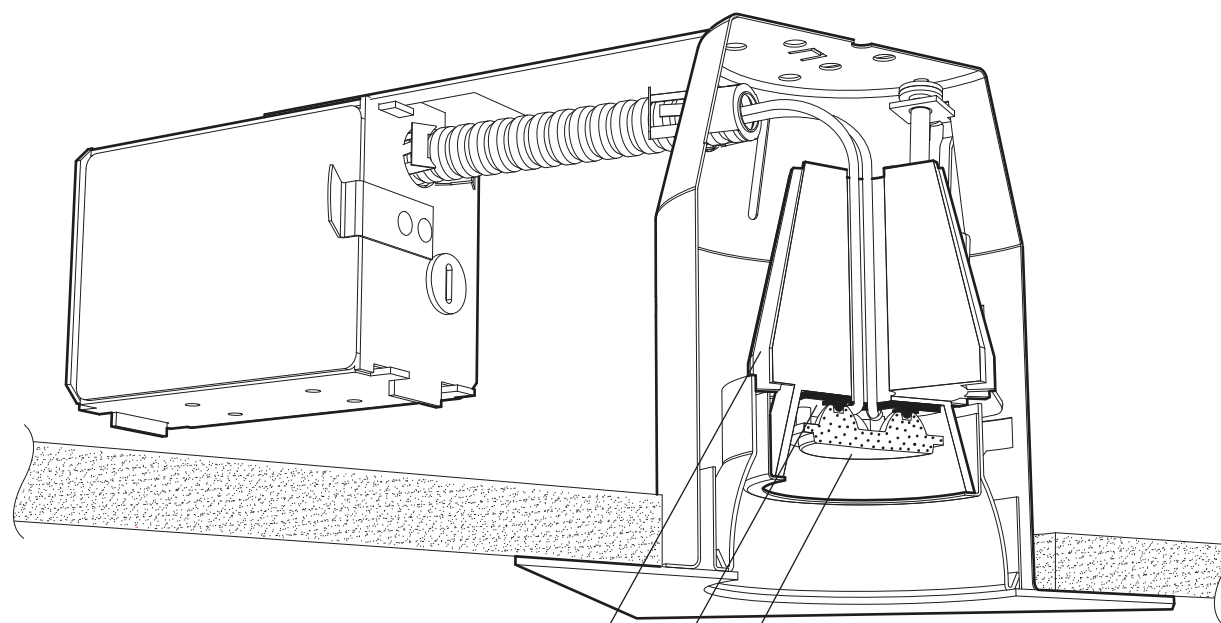**RADIATEUR**

Conception personnalisée par Eureka

MODULE DEL4 x Nichia NVSL219BT-V1
Disponible 4w**OPTIQUE**PMMA RTI (réflexion totale interne)
par Ledil. Angle total de faisceau
lumineux de 20° & 38°**COMPATIBILITÉ EUREKA**Convient à la plupart des
encastrés Eureka. Disponible
pour tous les types de boîtiers.

RÉNOVATION



NOUVELLE CONSTRUCTION

SPÉCIFICATIONS**4w**

ÉMETTEUR DEL

4 x Nichia NVSL219BT-V1 (5w totale système puissance)

OPTIQUE

LEDIL TIR - angle total de faisceau de 20° ou 38°

MODULE

Reconnu par UL - Fabriqué aux États-Unis

LUMENS (LIVRÉ)

400 lm

EFFICACITÉ

100 lm/w

CCT

ANSI 3-Step MacAdam Ellipse Binning

IRC

84 IRC

PILOTE (SANS GRADATION)

350 mA Courant Constant

PILOTE (GRADATION)

Gradation 0-10V / Gradation phase

VOLTAGE

120V ou 277V

L70 / LM-79

Plus que 60 000 hrs / Disponible

CERTIFICATION / GARANTIE

c-UL-us / 5 ans

*Pour d'autres options de gradation, veuillez consulter l'usine.

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com**LED.4.XX.XX**
LED.4.XX.XX.TL