
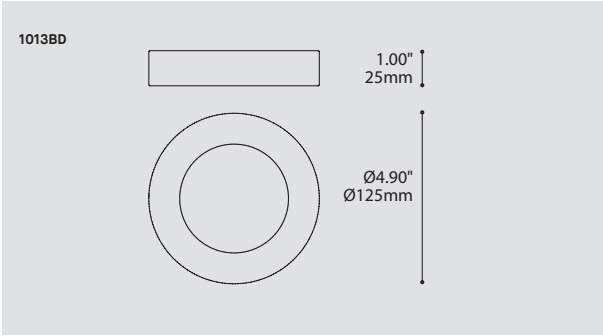


1013BD

PROJECT PROJÉT

SPEC TYPE

NOTES

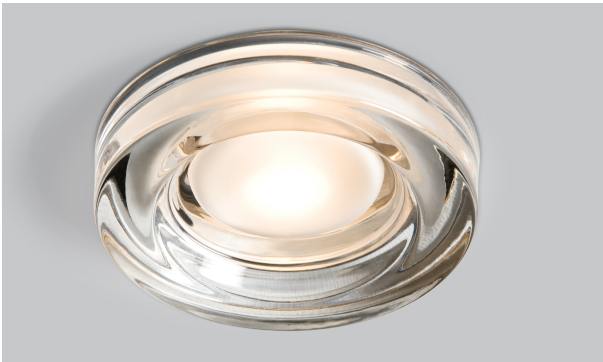

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
A complete unit consists of a trim (A) and a housing (C) selected according to light source, using the matrix below. Additionally, use section (B) to specify Eureka LED Modules.		
(A) TRIM ORDERING COMMANDE ENCASTRÉ		
MODEL MODÈLE		1013BD
1013BD ICE 1		
DIFFUSER FINISH FINI DIFFUSEUR		CFR
CFR CLEAR - FROSTED		
(B) LED ORDERING COMMANDE DEL		
EUREKA LED MODULES MODULES DEL EUREKA		LED.4.TL
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.4.TL  4W, LED (TWIST & LOCK MODULE)		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30 3000K		
35 3500K		
40 4000K		
ANGLE BEAM ANGLE DE FAISCEAU		
17 17°		
48 48°		
(C) HOUSING ORDERING COMMANDE BOÎTIER		
HOUSINGS BOÎTIERS		
Select housing code in matrix below based on light source, voltage options and housing type		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

DIM

LED






ø 3.50" (89mm)

HOUSING SELECTION MATRIX MATRICE DE SÉLECTION DU BOÎTIER

LIGHT SOURCE SOURCE LUMINEUSE	VOLTAGE VOLTAGE	REMODELING RÉNOVATION	NEW INSTALLATION NOUVELLE INSTALLATION
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
			
4W, EUREKA LED MODULE, Phase Dimming	120V ELECT.	1524C-9.35TL.4.DP	1604C-9.35TL.4.DP
4W, EUREKA LED MODULE, 0-10V Dimming	120-277V ELECT.	1524C-9.35TL.4.DV.8	1604C-9.35TL.4.DV.8

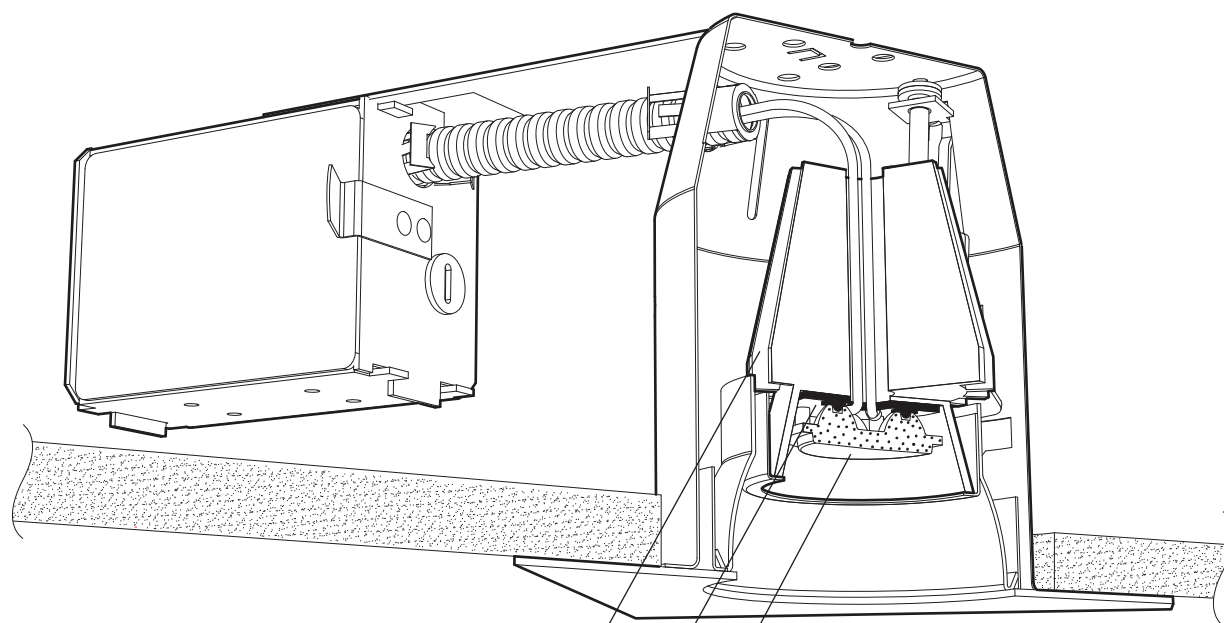


HEATSINK
Customized Eureka design


LED MODULE
4 x Nichia NVSL219BT-V1
Available in 4w

OPTIC
Ledil total internal reflection (tir)
20° & 38° total beam angle

EUREKA COMPATIBLE
Fits most Eureka trims and
available for all housing types



REMODELING



NEW CONSTRUCTION

SPECIFICATIONS

4w

LED EMITTER	4 x Nichia NVSL219BT-V1 (5w total system wattage)
OPTIC	LEDIL TIR - 20° & 38° total beam angle
MODULE	UL recognized - made in USA
LUMENS (DELIVERED)	400 lm
EFFICACY	100 lm/w
CCT	ANSI 3-Step MacAdam Ellipse Binning
CRI	84 CRI
DRIVER (NON-DIMMING)	350 mA Constant Current
DRIVER (DIMMING)	0-10V Dimming / Phase Dimming
VOLTAGE	120V or 277V
L70 / LM-79	More than 60 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year


*Please consult factory for dimming & controller options.




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




LED.4.XX.XX
LED.4.XX.XX.TL

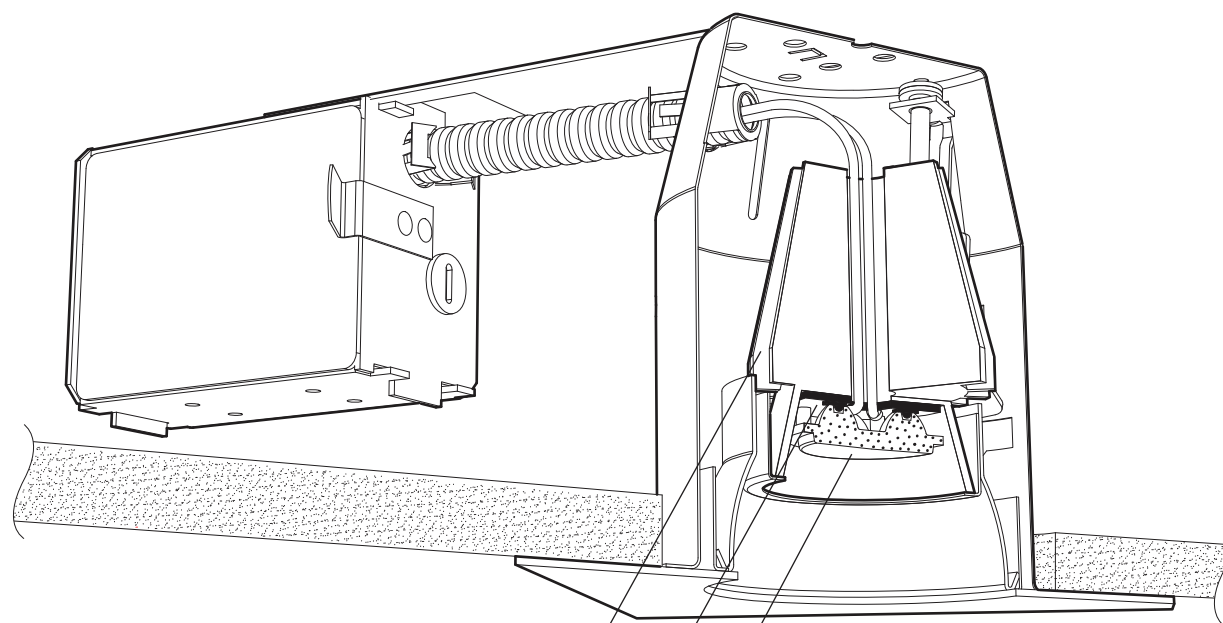**RADIATEUR**

Conception personnalisée par Eureka

MODULE DEL4 x Nichia NVSL219BT-V1
Disponible 4w**OPTIQUE**PMMA RTI (réflexion totale interne)
par Ledil. Angle total de faisceau
lumineux de 20° & 38°**COMPATIBILITÉ EUREKA**Convient à la plupart des
encastrés Eureka. Disponible
pour tous les types de boîtiers.

RÉNOVATION



NOUVELLE CONSTRUCTION

SPÉCIFICATIONS**4w**

ÉMETTEUR DEL

4 x Nichia NVSL219BT-V1 (5w totale système puissance)

OPTIQUE

LEDIL TIR - angle total de faisceau de 20° ou 38°

MODULE

Reconnu par UL - Fabriqué aux États-Unis

LUMENS (LIVRÉ)

400 lm

EFFICACITÉ

100 lm/w

CCT

ANSI 3-Step MacAdam Ellipse Binning

IRC

84 IRC

PILOTE (SANS GRADATION)

350 mA Courant Constant

PILOTE (GRADATION)

Gradation 0-10V / Gradation phase

VOLTAGE

120V ou 277V

L70 / LM-79

Plus que 60 000 hrs / Disponible

CERTIFICATION / GARANTIE

c-UL-us / 5 ans

*Pour d'autres options de gradation, veuillez consulter l'usine.

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com**LED.4.XX.XX**
LED.4.XX.XX.TL