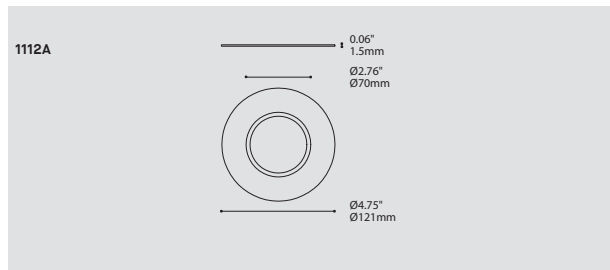


PROJECT PROJ1
SPEC TYPE
NOTES

**CODE**

(A) TRIM ORDERING **COMMANDE ENCASTRÉ**

STRUCTURE FINISH FINI STRUCTURE		WH
WH	WHITE	

BAFFLE FINISH FINI DÉFLECTEUR		WH
WH	WHITE	

(WATTAGE, LAMP TYPE, OTHER INFO)

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

ANGLE BEAM ANGLE DE FAISCEAU


LED.11	
20	20°
40	40°

Select housing code in matrix below based on light source, voltage options and housing type

1911A FLUSH™ MOUNTING ACCESSORY

**NEW
INSTALLATION**
NOUVELLE INSTALLATION

[illegible]

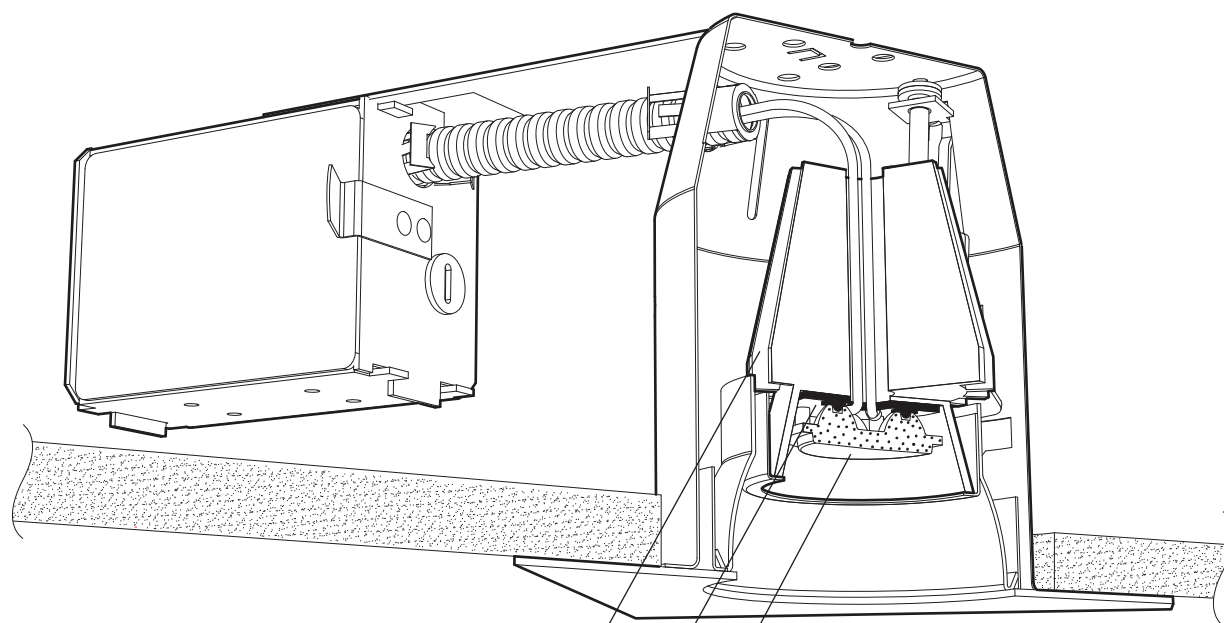


HEATSINK
Customized Eureka design


LED MODULE
4 x Nichia NVSL219BT-V1
Available in 4w / 8w

OPTIC
Ledil total internal reflection (tir)
20° & 38° total beam angle

EUREKA COMPATIBLE
Fits most Eureka trims and
available for all housing types



REMODELING



NEW CONSTRUCTION

SPECIFICATIONS

4w

LED EMITTER	4 x Nichia NVSL219BT-V1 (5w total system wattage)
OPTIC	LEDIL TIR - 20° & 38° total beam angle
MODULE	UL recognized - made in USA
LUMENS (DELIVERED)	400 lm
EFFICACY	100 lm/w
CCT	ANSI 3-Step MacAdam Ellipse Binning
CRI	84 CRI
DRIVER (NON-DIMMING)	350 mA Constant Current
DRIVER (DIMMING)	0-10V Dimming / Phase Dimming
VOLTAGE	120V or 277V
L70 / LM-79	More than 60 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year

8w

LED EMITTER	4 x Nichia NVSL219BT-V1 (10w total system wattage)
OPTIC	LEDIL TIR - 20° & 38° total beam angle
MODULE	UL recognized - made in USA
LUMENS (DELIVERED)	715 lm
EFFICACY	90 lm/w
CCT	ANSI 3-Step MacAdam Ellipse Binning
CRI	84 CRI
DRIVER (NON-DIMMING)	700mA Constant Current
DRIVER (DIMMING)	0-10V Dimming / Phase Dimming
VOLTAGE	120V or 277V
L70 / LM-79	More than 60 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year

*Please consult factory for dimming & controller options.




EUREKA


225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




LED.X.XX.XX
LED.X.XX.XX.TL

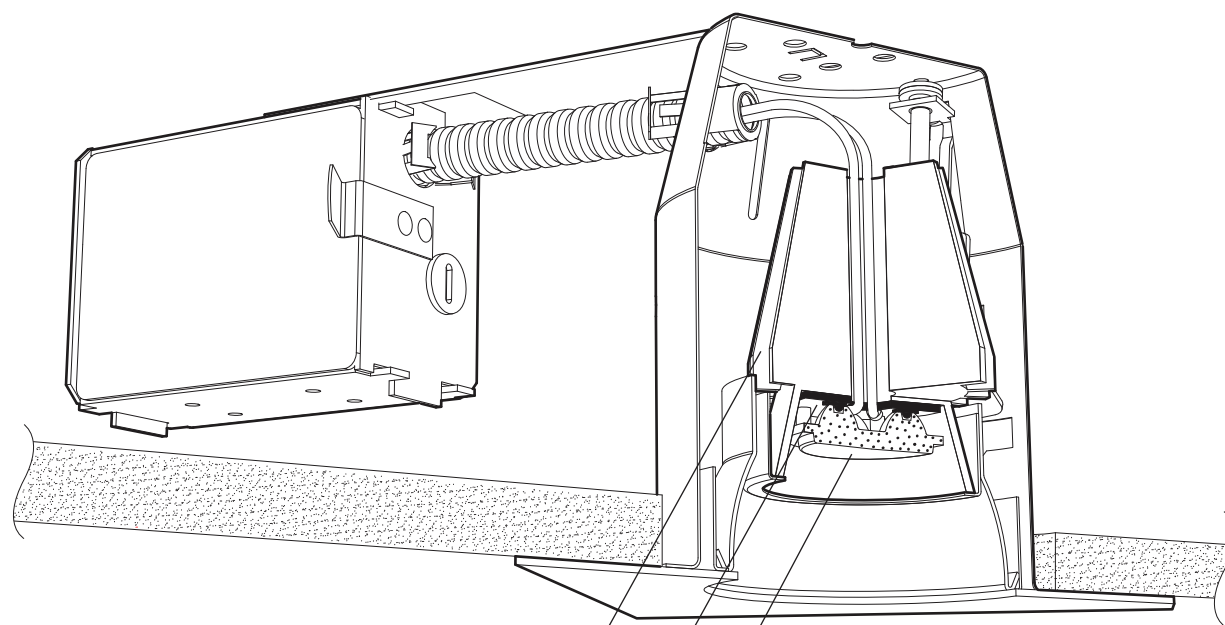**RADIATEUR**

Conception personnalisée par Eureka

MODULE DEL4 x Nichia NVSL219BT-V1
Disponible 4w / 8w**OPTIQUE**PMMA RTI (réflexion totale interne)
par Ledil. Angle total de faisceau
lumineux de 20° & 38°**COMPATIBILITÉ EUREKA**Convient à la plupart des
encastrés Eureka. Disponible
pour tous les types de boîtiers.

RÉNOVATION



NOUVELLE CONSTRUCTION

SPÉCIFICATIONS**4w****ÉMETTEUR DEL**

4 x Nichia NVSL219BT-V1 (5w totale système puissance)

OPTIQUE

LEDIL TIR - angle total de faisceau de 20° ou 38°

MODULE

Reconnu par UL - Fabriqué aux États-Unis

LUMENS (LIVRÉ)

400 lm

EFFICACITÉ

100 lm/w

CCT

ANSI 3-Step MacAdam Ellipse Binning

IRC

84 IRC

PILOTE (SANS GRADATION)

350 mA Courant Constant

PILOTE (GRADATION)

Gradation 0-10V / Gradation phase

VOLTAGE

120V ou 277V

L70 / LM-79

Plus que 60 000 hrs / Disponible

CERTIFICATION / GARANTIE

c-UL-us / 5 ans

8w

4 x Nichia NVSL219BT-V1 (10w totale système puissance)

LEDIL TIR - angle total de faisceau de 20° ou 38°

Reconnu par UL - Fabriqué aux États-Unis

715 lm

90 lm/w

ANSI 3-Step MacAdam Ellipse Binning

84 IRC

700mA Courant Constant

Gradation 0-10V / Gradation phase


120V ou 277V

Plus que 60 000 hrs / Disponible

c-UL-us / 5 ans

*Pour d'autres options de gradation, veuillez consulter l'usine.

**EUREKA**225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com**LED.X.XX.XX**
LED.X.XX.XX.TL

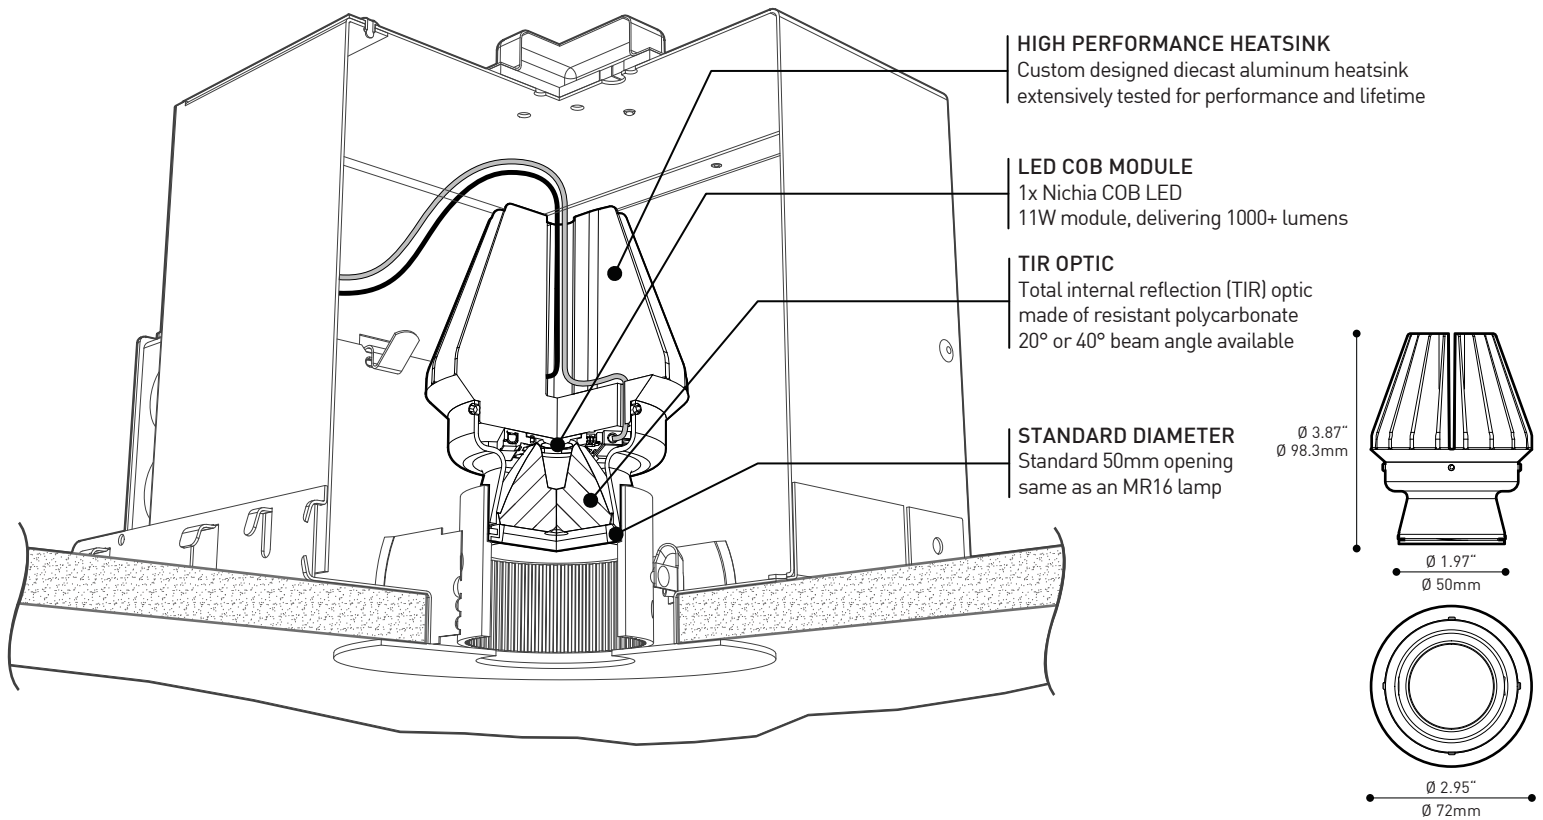


EUREKA COMPATIBLE TRIMS

1112AD BASS*

1112A MEGA BASS

* LIMITED ADJUSTMENT ANGLE

EUREKA COMPATIBLE HOUSINGS



Get the latest compatible trims
& compatible housings lists by
consulting the eureka website:

www.eurekalkighting.com

CHARACTERISTICS

11w

LED EMITTER**

1x Nichia Chip On Board (COB) LED - 14w total system wattage

OPTICS

TIR - 20° & 40° beam angle

MODULE

UL recognized - Made in USA

LUMENS**

1067 delivered lumens

EFFICACY

90 lumens / Watt

CRI

83 CRI typical

DRIVER (DIMMING)

Hatch [Phase dimming] 120V only ***

DRIVER (DIMMING)

Hatch [0-10V dimming] 120-277V ***

VOLTAGE

120V or 277V

L70 / LM-79

50 000 hrs / Available

CERTIFICATION / WARRANTY


C-UL-us / 5 years

** VALUES VALIDATED ON SSL LIGHTING FACTS LABELS. 1067 DELIVERED LUMENS WITH 40 DEGREES OPTIC. LUMENS MAY VARY WITH TRIM USED.

*** PLEASE CONSULT FACTORY FOR DIMMING & CONTROLLER OPTIONS.



LED.11.XX.XX

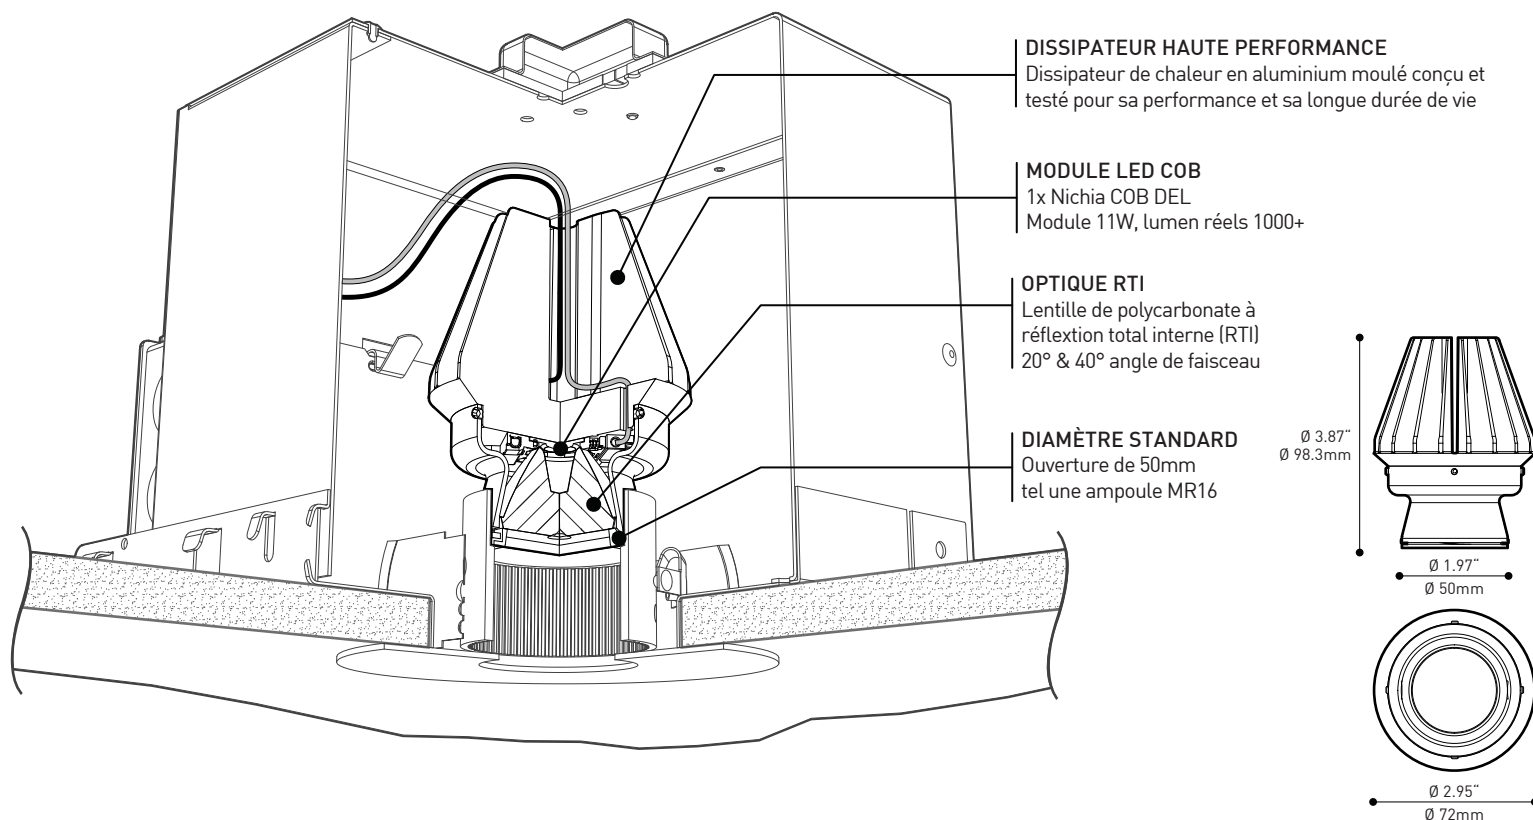


ENCASTRÉE EUREKA COMPATIBLES

1112AD BASS*

1112A MEGA BASS

* ANGLE DE PIVOT LIMITÉ

BOÎTIERS EUREKA COMPATIBLES



1604.X.35X



Consultez la mise à jour de la liste des garnitures et boîtiers compatibles:

www.eurekalkinghting.com

CARACTÉRISTIQUES 11w

SOURCE LUMINEUSE**	1x Nichia Chip On Board (COB) DEL- 14w total système
OPTIQUES	RTI- 20° & 40° angle de faisceau
MODULE	UL reconnu- Fabriqué aux États-Unis
LUMENS**	1067 lumens réels
EFFICACITÉ	90 lumens / Watt
IRC	83 IRC typique
PILOTE (GRADATEUR)	Hatch (Gradation de type Phase) 120V seulement ***
PILOTE (GRADATEUR)	Hatch (Gradation de type 0-10V) 120-277V ***
VOLTAGE	120V or 277V
L70 / LM-79	50 000 heures / disponible
CERTIFICATION / GARANTIE	C-UL-us / 5 ans

** VALEURS VALIDÉES SUR L'ÉTIQUETTE SSL LIGHTING FACTS. 1067 LUMENS RÉELS AVEC L'OPTIQUE 40 DEGRÉS. LES LUMENS PEUVENT VARIER SELON LA GARNITURE UTILISÉ.

*** VEUILLEZ COMMUNIQUER AVEC VOTRE REPRÉSENTANT POUR LA LISTE DES GRADATEURS COMPATIBLES.



LED.11.XX.XX