


1112ADI / 1112BDI

PROJECT PROJÉT
SPEC TYPE
NOTES

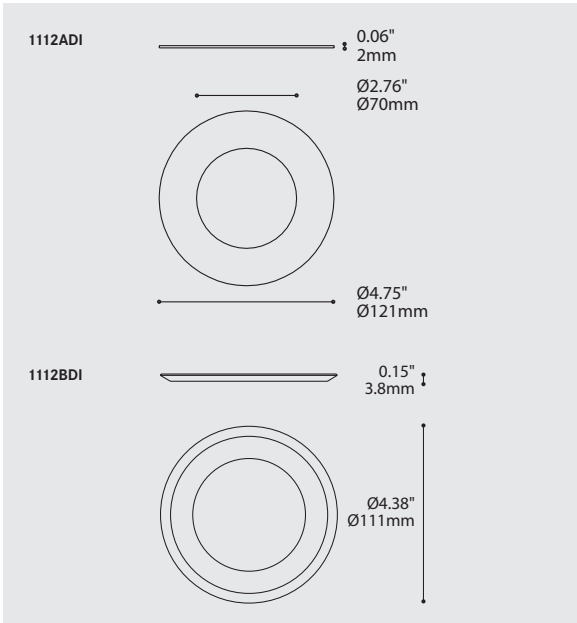

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE CODE

This trim is compatible with PAR20 lamp type. A complete unit consists of a trim (A) and a housing (B). Select the appropriate housing below. Accessories (C) are additional options.

(A) TRIM ORDERING COMMANDE ENCASTRÉ

MODEL	MODÈLE
1112ADI	FIXED FLAT SHOWER TRIM WITH CONICAL BAFFLE
1112BDI	FIXED BEVELLED SHOWER TRIM WITH CONICAL BAFFLE

STRUCTURE FINISH FINI STRUCTURE

BLK	BLACK
CHR	CHROME
S C	SATIN CHROME
WH	WHITE

DIFFUSER FINISH FINI DIFFUSEUR FRO

FRO	FROST
-----	-------

(B) HOUSING ORDERING COMMANDE BOÎTIER

HOUSINGS	BOÎTIERS

Select housing code in matrix below based on light source, voltage options and housing type

(C) ACCESSORY ORDERING COMMANDE ACCESSOIRE

ACCESSORIES	ACCESSOIRES
1911A*	FLUSH™ MOUNTING ACCESSORY (FOR 1112ADI ONLY)

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

Design:	Family of fixed conical baffled trims with a recessed lamp and closed glass for indoor wet locations
Light Source:	Dimmable incandescent medium base socket for PAR20 lamps
Installation:	Functions with remodeling or new construction (sold separately)
Structure:	Die-stamped and welded 16 GA steel construction with temperature resistant plating or polyester powder coat finish
Optic:	Stamped aluminium conical baffle with frosted crystal glass lens
Certified:	c-UL-us Damp rated (Interior only - mild spray - no sauna)
Conception:	Famille d'encastres fixes avec lampe reculée en retrait, déflecteur conique et verre fermé pour endroits humides
Source lumineuse:	Incandescent à intensité variable avec douille moyenne pour lampe PAR20
Installation:	Conçu pour utilisation avec boîtier de type rénovation ou nouvelle construction (boîtier vendu séparément)
Structure:	Acier 16 GA embouti et soudé avec placage ou peinture électrostatique résistant à la température
Optique:	Réflecteur conique d'aluminium estampé avec lentilles de verre en cristal givré
Certifié:	c-UL-us Emplacement Humide (Intérieur seulement - légère exposition à l'eau - pas de sauna)



Ø 3.50" (89MM)

HOUSING SELECTION MATRIX MATRICE DE SELECTION DU BOÎTIER

LIGHT SOURCE SOURCE LUMINEUSE	VOLTAGE VOLTAGE	DIMMING OPTION OPTION DE GRADATION	REMODELING RÉNOVATION	NEW INSTALLATION NOUVELLE INSTALLATION	NEW INSTALLATION (AIR RETURN PLENUM) NOUVELLE INSTALLATION (ESPACE A RETOUR D'AIR)	NEW INSTALLATION (INSULATED CEILING + AIR TIGHT) NOUVELLE INSTALLATION (HERMÉTIQUE + PLAFOND ISOLÉ)
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)						
50W, INC, PAR20, MEDIUM BASE	120V		1501C-5G.35	1601C-5G.35	1711C3-5G.35	