

12640-3X1

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH COMBINATIONS COMBINAISONS DE FINIS



159X REMODELING
159X RÉNOVATION

9.00" 229mm

27.88" 708mm

7.58" 193mm

19.57" 497mm

169X NEW CONSTRUCTION
169X NOUVELLE CONSTRUCTION

8.70" 221mm
HAL-LED

28.30" 719mm

8.50" 216mm

19.57" 497mm

□ 6.9" x 18.7"
(175mm x 475mm)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE			CODE
MODEL MODÈLE			12640-3X1
12640-3X1	MEGA BASS 3X1		
HOUSINGS BOÎTIERS			
159X	REMODELING		
169X	NEW CONSTRUCTION		
LIGHT SOURCE SOURCE LUMINEUSE			
LED.8		8W, LED	
LED.11		11W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR			
27	2700K		
30	3000K		
35	3500K		
40*	4000K		
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)			
90*	90+ CRI		
	*MANDATORY FOR LED 8W		
ANGLE BEAM ANGLE DE FAISCEAU			
LED.8			
17	17°		
48	48°		
LED.11			
20	20°		
40	40°		
VOLTAGE VOLTAGE			
120V	120 VOLT		
277V*	277 VOLT		
*NOT AVAILABLE IN LED 8W WITHOUT DV DRIVER OPTION			
DIMMING OPTION OPTION DE GRADATION			
FOR LED ONLY			
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
LED DIMMING DRIVER IS OPTIONAL FOR 12640-1X1 8W AND STANDARD FOR 12640-1X1 11W, 12640-2X1, 12640-3X1 AND 12640-4X1, PLEASE SPECIFY YOUR DIMMING TYPE.			
TRIM FINISH FINI CADRE			
BLK	BLACK		
WH	WHITE		
RING FINISH FINI ANNEAUX			
BLK	BLACK		
WH	WHITE		
ENCLOSURE FINISH FINI BOÎTIER			
BLK	BLACK		
WH	WHITE		
ACCESSORY ACCESSOIRE			
19640-3X1	FLUSH™ MOUNTING ACCESSORY (FOR 12640-3X1)		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT


DIM

LED

OUTER
45° pivot

INNER
30° pivot

The contemporary and functional Mega Bass multiple recessed fixture, features up to four fully directional light sources in both linear and square formats. Larger format, both standard and high performance Eureka LED modules with optional phase dimming (DP - 120V only) or 0-10V dimming (DV). Dimming available for all light sources. To maximize design flexibility, the rings and the finish trim of the Mega Bass are available in black or white, while the enclosure is offered in reflective white or discreet black. Using our patented automatically locating mounting clip, Mega Bass is designed for quicknstallation in both new construction ceilings (169X) or when remodeling (159X) in an existing ceiling. For a clean look without the hassle of a trim-less installation, the Bass fixture can be installed using our Flush™ mounting accessory (19640).

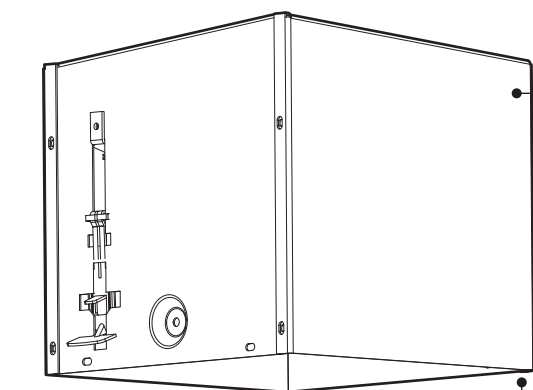

CONTEMPORARY DESIGN
Recessed multiple fixture.
Features up to 2 fully directional
light sources.


LIGHT SOURCES
LED: 8W / 11W
(Optional dimming available with Led)

MANY POSSIBLE FINISH COMBINATIONS:


ENCLOSURE
Discreet black / Reflective white

RING
Black / White
Indépendants et directionnels


TRIM
Black / White
Highly decorative, or can be hidden








REMODELING OPTION
Unique automatically locating mounting
clips for quick installation

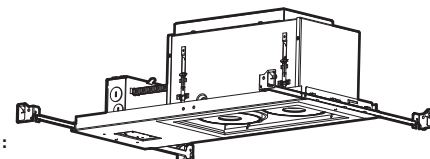

NEW CONSTRUCTION OPTION
Mounting plate available for
split shipping in advance



FLUSH™ MOUNTING ACCESSORY
Quick and clever design for
a trim-less look

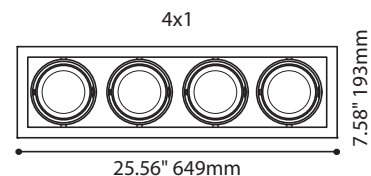

SPECIFICATIONS

LIGHT SOURCE

OPTIC

MODULE

LUMENS (DELIVERED)

EFFICIENCY

CCT

CRI

DRIVER (NON-DIMMING)

DRIVER (DIMMING)

VOLTAGE

L70 / LM-79

CERTIFICATION / WARRANTY

LED 8W

4 x Nichia
TIR - 20° & 38° total beam angle
UL recognized - made in USA

945 lm (4000K)

95.45 lm/w (4000K)

ANSI 4000K 3-Step MacAdam Ellipse Binning

84 CRI (typical)

700mA Constant Current

0-10V Dimming (DV) / Phase Dimming (DP)

120V or 277V

50 000 hrs / On request

c-UL-us / 5 year

LED 11W

1 x Nichia Chip On Board (COB) NSBLL066A
TIR - 20° & 40° total beam angle

1629 lm (4000K)

110.81 lm/w (4000K)

83 CRI (typical)

350 mA Constant Current

50 000 hrs / On request


*Please consult factory for dimming & controller options.



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



12640-XXX
MEGA BASS

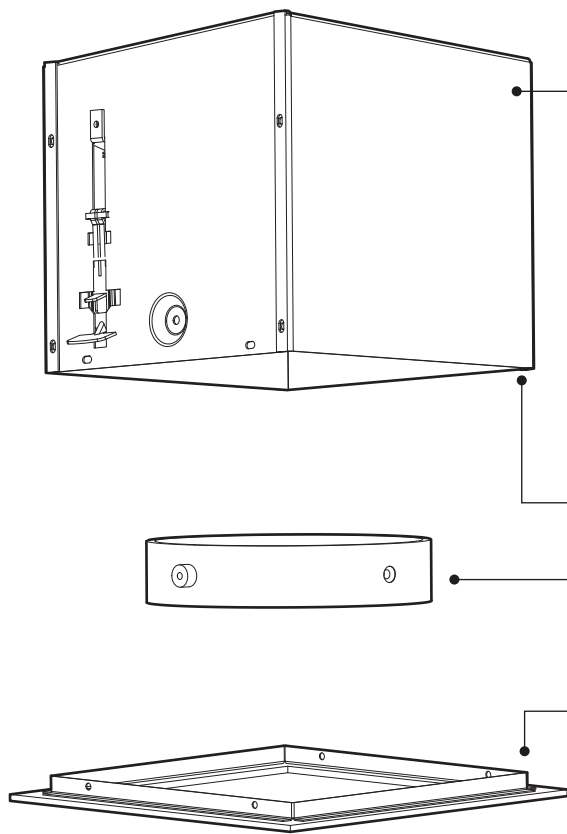**DESIGN CONTEMPORAIN**

L'encastré multiple Bass comprend quatre lampes orientables en configuration linéaire ou carrée.

SOURCE LUMINEUSE

LED: 8W / 11W

(DEL offertes avec options de gradation)

PLUSIEURS COMBINAISONS DE FINITION POSSIBLES:**BOITIERS**

Noir discret / Blanc réfléchissant

ANNEAUX


Noir / Blanc

Indépendants et directionnels


CADRES

Noir / Blanc


Décoratifs ou cachés

**RÉNOVATION**





Système breveté exclusif de fixation pour installation rapide

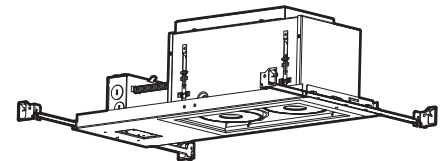**NOUVELLE CONSTRUCTION**

La plaque de montage peut être expédiée séparément du boîtier, afin d'anticiper l'installation du gypse

**L'ACCESSOIRE DE MONTAGE FLUSH™**

Conception rapide et intelligente pour un look sans bordure

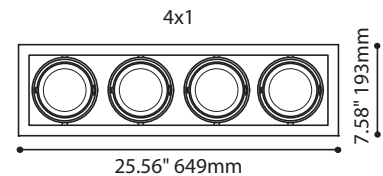**CARACTÉRISTIQUES****SOURCE LUMINEUSE****OPTIQUE****MODULE****LUMENS (LIVRÉ)****EFFICACITÉ****CCT****IRC****PILOTE (SANS GRADATION)****PILOTE (GRADATEUR)****VOLTAGE****L70 / LM-79****CERTIFICATION / GARANTIE****LED 8W**

4 x Nichia

TIR - 20° & 38° angle de faisceau

UL reconnu- Fabriqué aux États-Unis

945 lm (4000K)

95.45 lm/w (4000K)

ANSI 4000K 3-Step MacAdam Ellipse Binning

84 CRI (typique)

700mA Courant Constant

0-10V Gradation (DV) / Gradation Phase (DP)

120V or 277V

50 000 hrs / Sur demande

c-UL-us / 5 ans

LED 11W

1 x Nichia Chip On Board (COB) NSBLL066A

TIR - 20° & 40° angle de faisceau

1629 lm (4000K)

110.81 lm/w (4000K)

83 CRI (typique)

350 mA Courant Constant

50 000 hrs / Sur demande

*Veuillez communiquer avec votre représentant pour la liste de gradateurs compatibles.



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



12640-XXX
MEGA BASS