

ALVER 2020B-MCC

PROJECT PROJÉT

SPEC TYPE

NOTES



FAMILY FAMILLE



4520-MCC




2020/4020-MCC



4424-MCC



4428-MCC

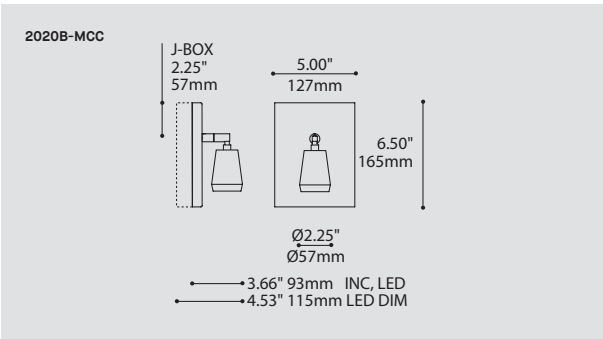

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		2020B-MCC
2020B-MCC ALVER		
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
INC.60		60W, INC, A19 / B10 / G30 / HAL T10, MEDIUM BASE (120V ONLY)
LED.4		4W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
FOR LED ONLY		
27		2700K
30		3000K
35		3500K
40*		4000K
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
90		90+ CRI FOR LED ONLY - MANDATORY
ANGLE BEAM ANGLE DE FAISCEAU		
FOR LED ONLY		
17		17°
48		48°
VOLTAGE VOLTAGE		
120V		120 VOLT
277V		277 VOLT
DIMMING OPTION OPTION DE GRADATION		
FOR LED ONLY		
DV		0-10V DIMMING (120-277V)
DP		PHASE DIMMING (120V ONLY)
MOUNTING MONTAGE		REC
REC		RECTANGULAR CANOPY / PAVILLON RECTANGULAIRE FOR INC & LED: 0.60" CANOPY (2441C) FOR LED DIMMABLE: 1.50" CANOPY (2441G)
STRUCTURE FINISH FINI STRUCTURE		CHR
CHR		CHROME
CUP FINISH FINI COUPE		
BLK		BLACK
CHR		CHROME

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Luxuriously simple, the Alver is a versatile classic with a bare incandescent lamp or a discrete LED projector.
INSTALLATION:	Wall mounted on a chrome rectangular canopy.
LIGHT SOURCE:	Available with dimming or non-dimming 4W LED, as well as incandescent medium base.
STRUCTURE:	Machined aluminum base with chrome plate or black powder coat finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	Simplement luxueux, l'Alver est un classique polyvalent avec une ampoule incandescente qui devient un projecteur discret lorsqu'utilisé avec une source lumineuse DEL.
INSTALLATION:	Applique murale sur pavillon chromé rectangulaire.
SOURCE LUMINEUSE:	DEL 4W offerte, avec ou sans option de gradation; ainsi qu'une base médium incandescente.
STRUCTURE:	Base en aluminium machiné avec fini chromé ou peinture noire électrostatique.
CERTIFIÉ:	c-CSA-us

ANATOMY

BIM


DIM

IES

LED



ALVER

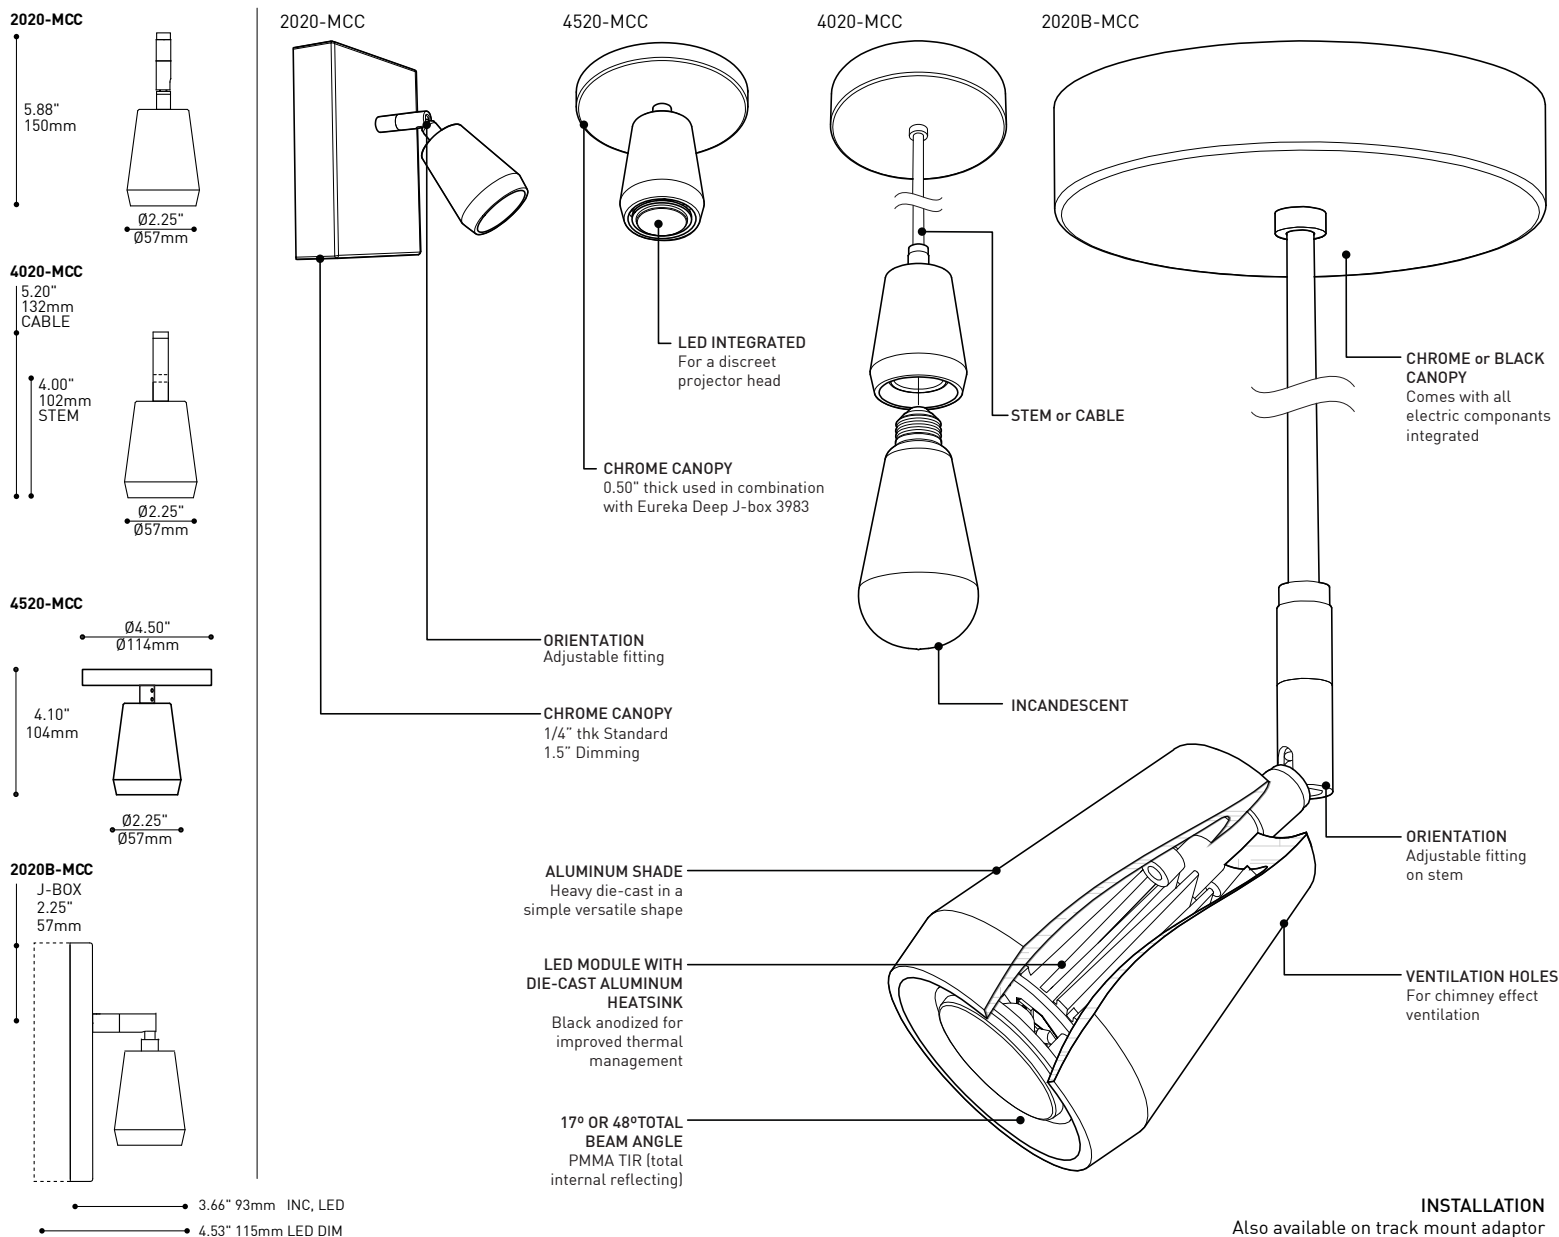

INSTALLATION

Also available on track mount adaptor

SPECIFICATIONS

LIGHT SOURCE

MODULE

DELIVERED LUMENS

CRI

HOUSING

HEATSINK

LIGHT DISTRIBUTION

OPTICS

VOLTAGE

DRIVER

DIMMING

LM-79

WARRANTY

CERTIFICATION

LED

4 x high powered LEDs on MCPCB - total ±4 w

UL recognized - made in USA

330 lm - 350 lm (4000K)

80 CRI (typical)

Die-cast aluminum

Black anodized aluminium

Directional projector (2020(B))/Direct (4020)

Total Internal Reflection (TIR) of 17° & 48 ° beam angle

120V (DP) or 120-277V (DV or non-dimming)

Constant Current driver 350 mA, UL Recognized

Phase Dimming (DP) and 0-10V Dimming (DV)

On request

5 years (on electronic components)

CSA recognized

INCANDESCENT

Inc Medium Base - 60W

N/A

N/A

N/A

N/A

N/A

N/A

N/A

120V

Dimmable




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



2020-MCC
2020B-MCC

4020-MCC
4520-MCC

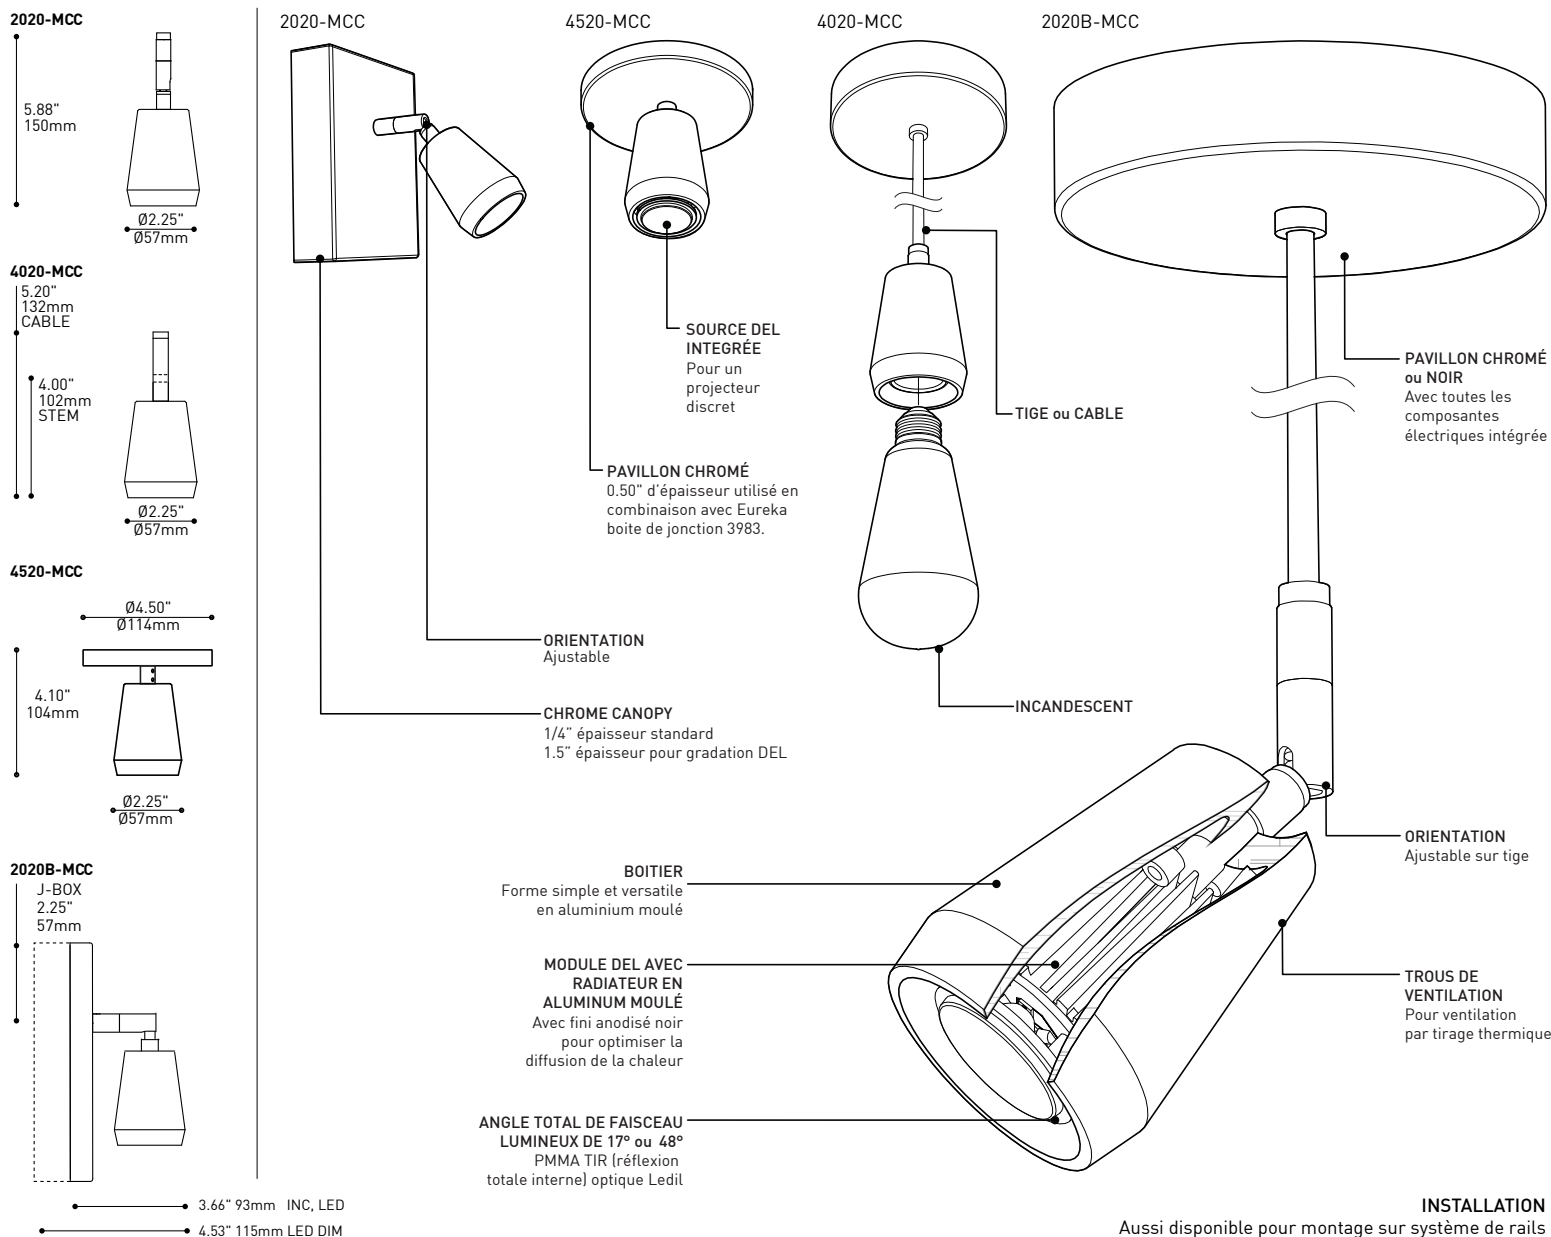

SPÉCIFICATIONS

LIGHT SOURCE

MODULE

LUMENS RÉELS

IRC

BOITIER

RADIATEUR

DISTRIBUTION LUMINEUSE

OPTIQUE

VOLTAGE

PILOTE

GRADATION

LM-79

GARANTIE

CERTIFICATION

LED

4 x DEL haute performance sur MCPCB - total ±4 w

Reconnue par UL - Fabriqué aux États-Unis

330 lm - 350 lm (4000K)

80 CRI (typique)

Aluminium moulé

Aluminium anodisé noir

Projecteur directionnel (2020(B))/Direct (4020)

LEDIL TIR - angle total de faisceau de 17° & 48°

120V (DP) ou 120-277V (DV ou non gradable)

Pilote 350 mA à courant constant 350 mA, UL Recognized

Gradation par phase (DP) ou de type 0-10V (DV)

Sur demande

5 ans (sur les composantes électroniques)

Reconnu par CSA

INCANDESCENT

Inc Base moyenne - 60W

N/A

N/A

N/A

N/A

N/A

N/A

N/A

120V

N/A

Intensité variable



EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



2020-MCC
2020B-MCC

4020-MCC
4520-MCC