

PIXEL 2026B


PROJECT PROJÉT

SPEC TYPE

NOTES



FAMILY FAMILLE

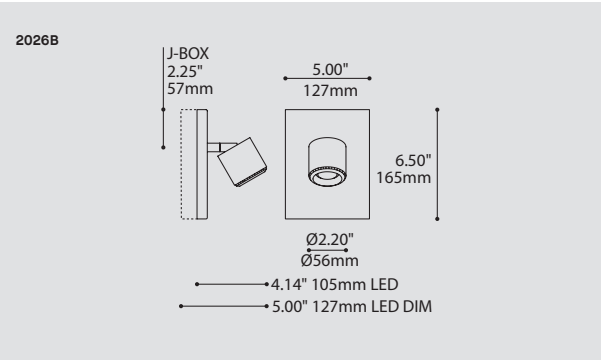


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		2026B
2026B	PIXEL	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.4		4W, LED
LED.8		8W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
ANGLE BEAM ANGLE DE FAISCEAU		
17	17°	
48	48°	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
MOUNTING MONTAGE		REC
REC	RECTANGULAR CANOPY / PAVILLON RECTANGULAIRE	
	 FOR LED: 0.60" CANOPY (2441C)	
	 FOR LED DIMMABLE & LED 8W 277V: 1.50" CANOPY (2441G)	
STRUCTURE FINISH FINI STRUCTURE		CHR
CHR	CHROME	
CYLINDER FINISH FINI CYLINDRE		
BLKA	BLACK ANODIZED	
S A	SATIN ALUMINUM	
WHE	WHITE FINE TEXTURE	
HEATSINK FINISH FINI RADIATEUR		BLKA
BLKA	BLACK ANODIZED	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Same beautiful proportions and clean look of the Point, Voxel and Pixel are smaller sized minimalist projectors. The cleverly integrated heat sink provides a beautiful front edge detail and allows for incredible LED performance in a mini-projector.
INSTALLATION:	Both Pixel and Voxel are framed on a rectangular chrome canopy and offer two-axis aiming.
LIGHT SOURCE:	4W and 8W LED with 0-10V (DV) or phase (DP) dimming versions available.
OPTIC:	17° or 48° beam angle total internal reflecting (TIR) multi-lens.
STRUCTURE	CNC machined aluminum housing with black, white or clear satin finish. Die-cast aluminum heat sink with black satin anodized finish and inner die-formed steel parts with black powder coat finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	De proportions élégantes et familières du Point, Voxel et Pixel sont les plus petits de notre gamme de projecteurs minimalistes. La délicate intégration du radiateur procure un détail distinctif et permet une gestion thermique efficace, assurant ainsi un puissant éclairage DEL.
INSTALLATION:	Pixel et Voxel sont montés sur un pavillon rectangulaire chromé et propose deux axes.
SOURCE LUMINEUSE:	DEL 4W et 8W offerte avec gradation de type 0-10V (DV) ou phase (DP).
OPTIQUE:	Angle de faisceau lumineux de 17° ou 48° total interne multi-lentilles (TIR).
STRUCTURE:	Cylindre d'aluminium usiné avec fini blanc, anodisé noir ou satin clair. Radiateur injecté en aluminium avec fini noir anodisé et pièces internes en acier et finies à la peinture électrostatique noire.
CERTIFIÉ:	c-CSA-us

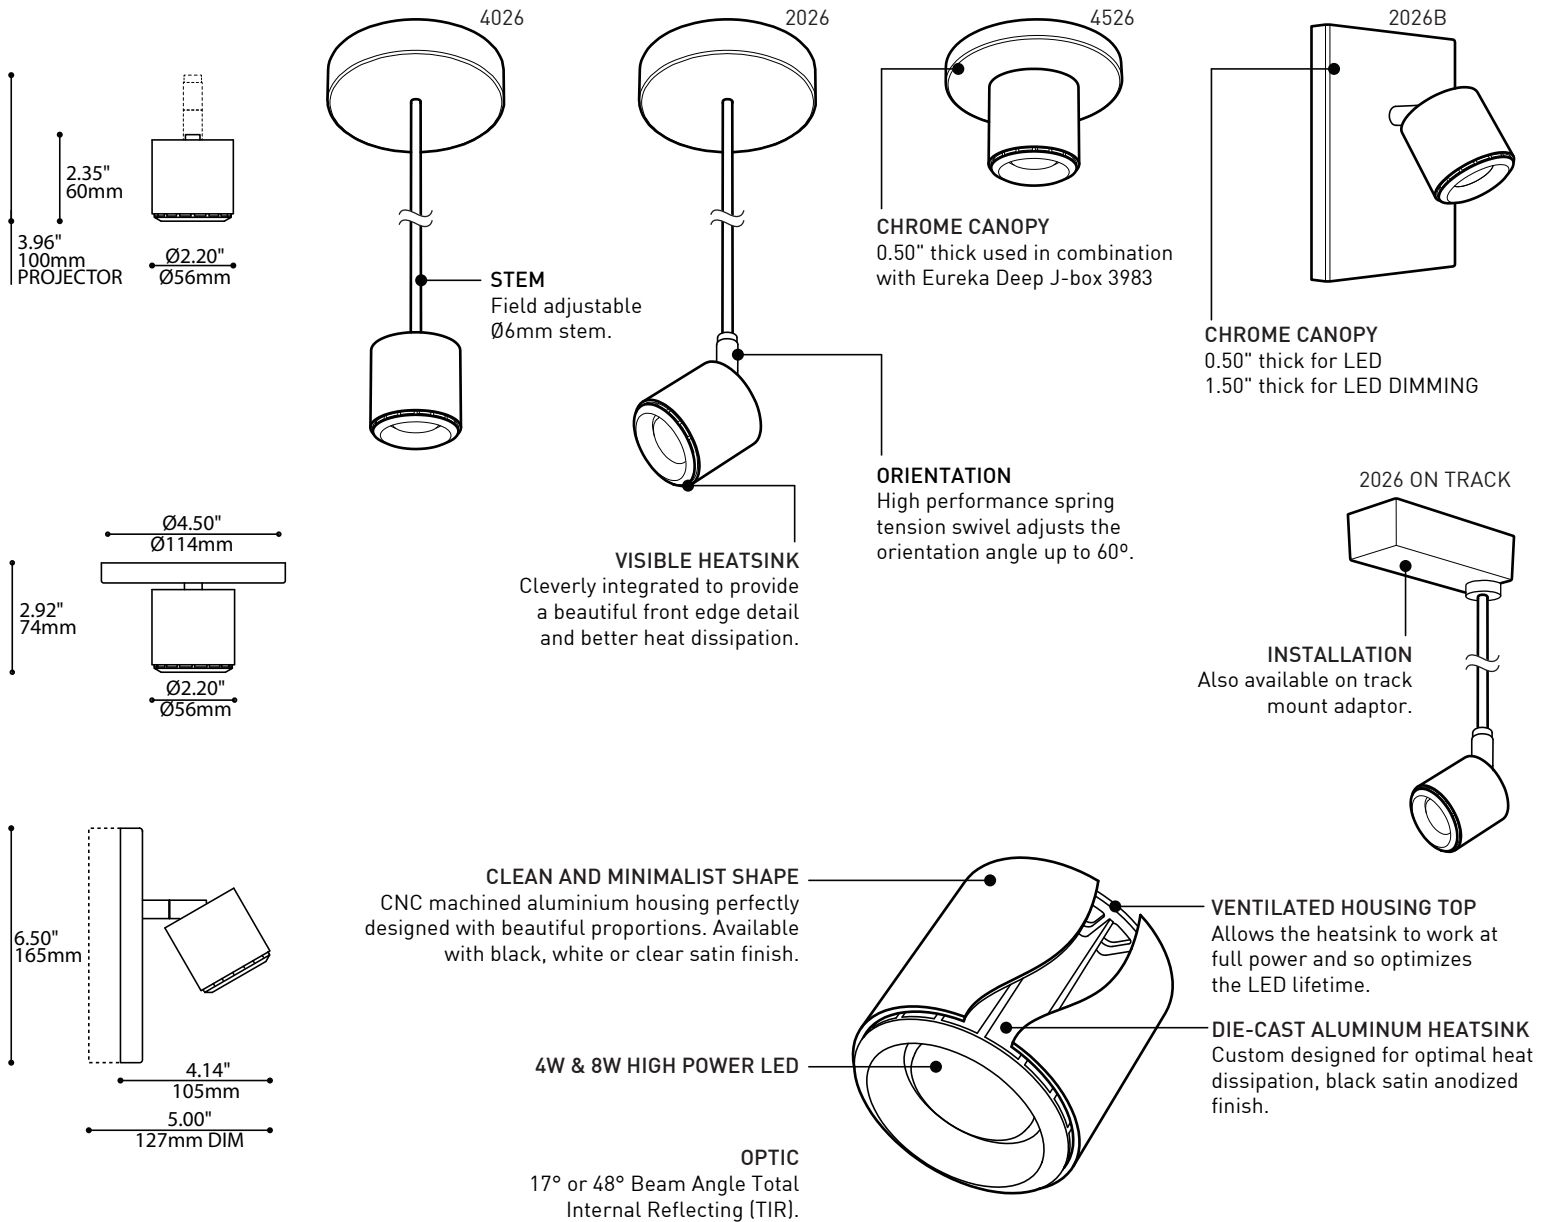

SPECIFICATIONS

LIGHT SOURCE
DELIVERED LUMENS
CRI
CCT
HOUSING
HEATSINK
LIGHT DISTRIBUTION
OPTICS
VOLTAGE
DRIVER
DIMMING
LM-79
WARRANTY

4W LED

4x1W High Power LED on MCPCB - System Wattage 4.8W Total
541 lm
80 CRI (typical)
3-step MacAdam Ellipse binning
Machined aluminium cylinder
Black anodized aluminum
Directional projector (2026/2026B) or Direct (4026/4526)
Total Internal Reflection (TIR) of 17° & 48° beam angle
120V (DP) and 120-277V (DV)
Constant Current driver 350mA, UL Recognized
Phase Dimming (DP) and 0-10V Dimming (DV)
On request
5 years

8W LED

4x2W High Power LED on MCPCB - System Wattage 9.9W Total
1003 lm
Constant Current driver 700mA, UL Recognized
On request




EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



2026 4026
2026B 4526

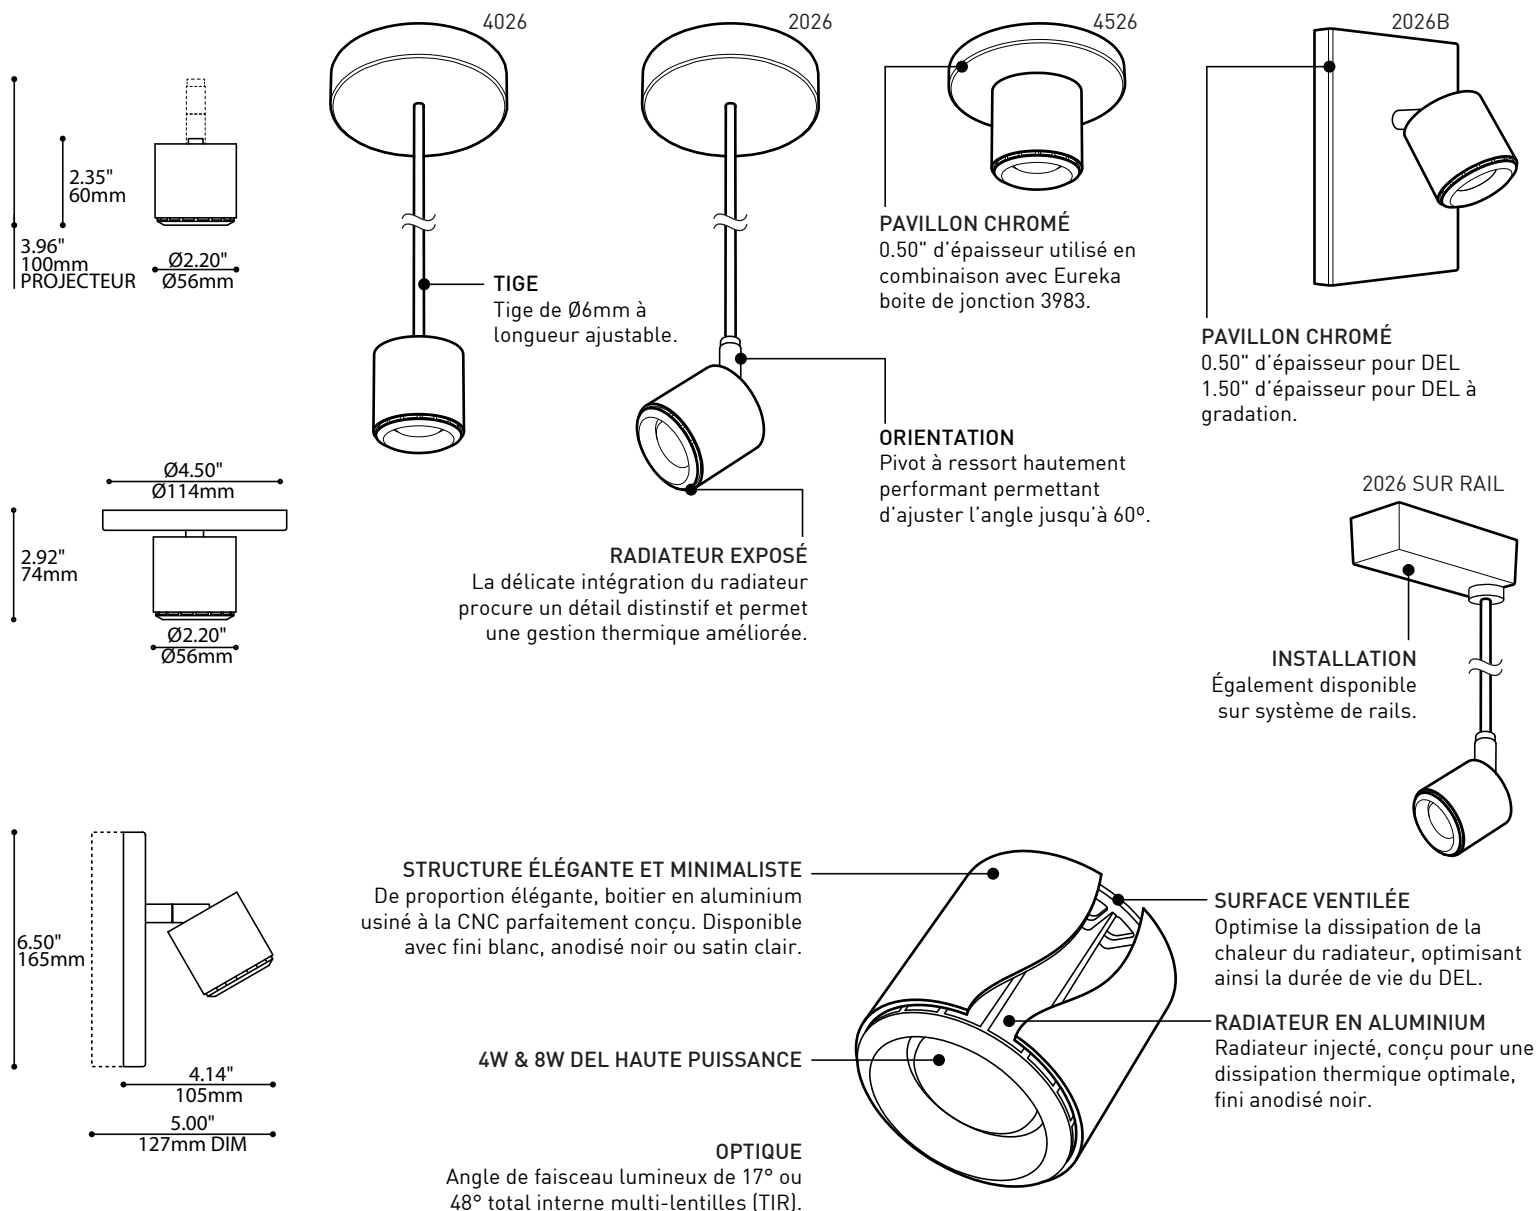

SPECIFICATIONS

SOURCE LUMINEUSE
LUMENS RÉELS

IRC

CCT

BOÎTIER

RADIATEUR

DISTRIBUTION LUMINEUSE

OPTIQUES

VOLTAGE

PILOTE

GRADATION

LM-79

GARANTIE

DEL 4W

4 DEL 1W haute puissance - Puissance totale de 4.8W

541 lm

80 CRI (typique)

3-step MacAdam Ellipse binning

Cylindre en aluminium usiné

Aluminium anodisé noir

Projecteur directionnel (2026/2026B) ou Direct (4026/4526)

Angle de faisceau de 17° & 48° Réflexion totale interne (TIR)

120V (DP) et 120-277V (DV)

Courant Constant 350mA, Reconnu UL

DP "phase dimming" et DV "0-10V dimming"

Sur demande

5 ans

DEL 8W

4 DEL 2W haute puissance - Puissance totale de 9.9W

1003 lm

80 CRI (typique)

3-step MacAdam Ellipse binning

Cylindre en aluminium usiné

Aluminium anodisé noir

Projecteur directionnel (2026/2026B) ou Direct (4026/4526)

Angle de faisceau de 17° & 48° Réflexion totale interne (TIR)

120V (DP) et 120-277V (DV)

Courant Constant 700mA, Reconnu UL

DP "phase dimming" et DV "0-10V dimming"

Sur demande

5 ans



EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



2026 4026
2026B 4526